




5-1743336-7 Product Details

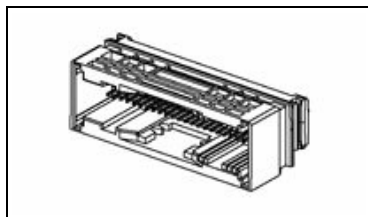

5-1743336-7

TE Internal Number: 5-1743336-7

Active

Micro-Power & Power Quadlok System

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Applies To Printed Circuit Board
- Connector
- Connector Assembly
- Connector Style = Header
- 75 Positions

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [AIR BAG 75P HEADER ASSEMBLY \(FA-II\)](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Feedback

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Connector
- Connector Type = Connector Assembly
- Sealed = No
- Mount Angle = Right Angle
- Post Type = 0.64 [.025] Square
- Keyed = Yes

Termination Features:

- Termination Method to PC Board = Through Hole - Solder

Contact Features:

- Contact Type = Tab
- Contact Style = Right-Angle
- [Tab Contacts](#) = Without
- 2.5mm Pin Diameter Contacts = Without
- [Contact Finish](#) = Selective Gold
- Contact Shape = Square
- Contact Base Material = Phosphor Bronze

Housing Features:

- Connector Style = Header
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 x 5.5 [.100 x .216]
- Header Color = Light Gray
- Housing Material = PBT - GF

Configuration Features:

- [Number of Positions](#) = 75
- Fiber Optic Contacts = Without
- Staggered Centerline = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 260°C, Wave solder capable to 240°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Identification Marking:

- Key ID = E-G

Conditions for Usage:

- Applies To = Printed Circuit Board

Other:

- Brand = TE Connectivity

