

<b>COIL:</b>	
RESISTANCE	330 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	2.0 VDC MIN.


<b>ENVIRONMENT:</b>	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

<b>NOTES:</b>	
OPERATE TIME	13 MS MAX.
RELEASE TIME	5 MS MAX.
CONTACT BOUNCE	5 MS MAX. (NC) 2 MS MAX. (NO)

CUST. NO.	Hi-G 2T-1C-126
-----------	-------------------

TYPE	07 RELAY
------	----------

**CUSTOMER DATA SHEET**

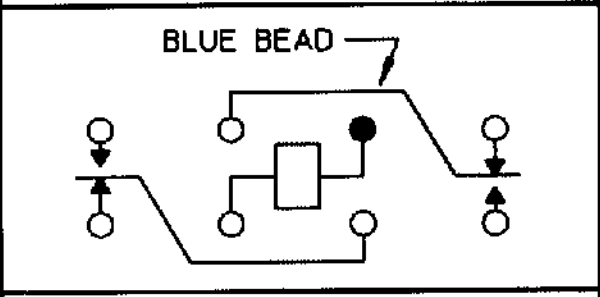

CONTACT RATING:	10A 30 VDC RES. 10A 115 VAC 400 HZ, 6A 30 VDC INDUCTIVE 100,000 OPERATIONS
-----------------	--

DR. R.B. 12/5/91 CK. 12/5/91



**B07B932BZ1-8008**