


Insulated Gate Bipolar Transistor

Ultralow $V_{CE(on)}$, 250 A


SOT-227

FEATURES

- Standard: optimized for minimum saturation voltage and low speed
- Lowest conduction losses available
- Fully isolated package (2500 V_{AC})
- Very low internal inductance (5 nH typical)
- Industry standard outline
- Designed and qualified for industrial level
- UL approved file E78996 
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

PRIMARY CHARACTERISTICS	
V_{CES}	600 V
$V_{CE(on)}$ (typical) at 200 A, 25 °C	1.16 V
I_C at $T_C = 90$ °C	250 A
Speed	DC to 1 kHz
Package	SOT-227
Circuit configuration	Single switch no diode

BENEFITS

- Designed for increased operating efficiency in power conversion: UPS, SMPS, TIG welding, induction heating
- Easy to assemble and parallel
- Direct mounting to heatsink
- Plug-in compatible with other SOT-227 packages

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNITS
Collector to emitter voltage	V_{CES}		600	V
Continuous collector current	I_C	$T_C = 25$ °C	359	A
		$T_C = 90$ °C	250	
Pulsed collector current	I_{CM}	$T_C = 175$ °C, $t_p = 6$ ms, $V_{GE} = 15$ V	945	
Clamped Inductive load current	I_{LM}		250	
Gate to emitter voltage	V_{GE}		± 20	V
Power dissipation	P_D	$T_C = 25$ °C	750	W
		$T_C = 90$ °C	425	
Isolation voltage	V_{ISOL}	Any terminal to case, $t = 1$ min	2500	V

ELECTRICAL SPECIFICATIONS ($T_J = 25$ °C unless otherwise noted)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Collector to emitter breakdown voltage	$V_{(BR)CES}$	$V_{GE} = 0$ V, $I_C = 0.4$ mA	600	-	-	V
Collector to emitter voltage	$V_{CE(on)}$	$I_C = 100$ A	-	1.01	1.16	
		$I_C = 200$ A	-	1.16	-	
		$I_C = 100$ A, $T_J = 125$ °C	-	0.96	-	
		$I_C = 200$ A, $T_J = 125$ °C	-	1.18	-	
		$I_C = 100$ A, $T_J = 150$ °C	-	0.95	-	
		$I_C = 200$ A, $T_J = 150$ °C	-	1.18	-	
Gate threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$, $I_C = 2$ mA	3.8	4.9	6.3	
		$V_{CE} = V_{GE}$, $I_C = 2$ mA, $T_J = 125$ °C	-	3.5	-	
Temperature coefficient of threshold voltage	$\Delta V_{GE(th)}/\Delta T_J$	$V_{CE} = V_{GE}$, $I_C = 2$ mA, 25 °C to 125 °C	-	-14	-	mV/°C
Collector to emitter leakage current	I_{CES}	$V_{GE} = 0$ V, $V_{CE} = 600$ V	-	0.2	100	μA
		$V_{GE} = 0$ V, $V_{CE} = 600$ V, $T_J = 125$ °C	-	51	-	
		$V_{GE} = 0$ V, $V_{CE} = 600$ V, $T_J = 150$ °C	-	508	-	
Gate to emitter leakage current	I_{GES}	$V_{GE} = \pm 20$ V	-	-	± 250	nA

**SWITCHING CHARACTERISTICS** ($T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Total gate charge (turn-on)	Q_g	$I_C = 75\text{ A}$, $V_{CC} = 520\text{ V}$, $V_{GE} = 15\text{ V}$	-	909	-	nC
Gate-to-emitter charge (turn-on)	Q_{ge}		-	139	-	
Gate-to-collector charge (turn-on)	Q_{gc}		-	249	-	
Turn-on switching loss	E_{on}	$T_J = 25\text{ }^{\circ}\text{C}$ $I_C = 100\text{ A}$ $V_{CC} = 480\text{ V}$ $V_{GE} = 15\text{ V}$ $R_g = 5.0\text{ }\Omega$ $L = 500\text{ }\mu\text{H}$	-	1.61	-	mJ
Turn-off switching loss	E_{off}		-	6.65	-	
Total switching loss	E_{tot}		-	8.26	-	
Turn-on delay time	$t_{d(on)}$		-	469	-	ns
Rise time	t_r		-	36	-	
Turn-off delay time	$t_{d(off)}$		-	539	-	
Fall time	t_f		-	109	-	
Turn-on switching loss	E_{on}		-	2.03	-	mJ
Turn-off switching loss	E_{off}		-	9.65	-	
Total switching loss	E_{tot}		-	11.68	-	
Turn-on delay time	$t_{d(on)}$	$T_J = 125\text{ }^{\circ}\text{C}$ $I_C = 100\text{ A}$ $V_{CC} = 480\text{ V}$ $V_{GE} = 15\text{ V}$ $R_g = 5.0\text{ }\Omega$ $L = 500\text{ }\mu\text{H}$	-	498	-	ns
Rise time	t_r		-	43	-	
Turn-off delay time	$t_{d(off)}$		-	640	-	
Fall time	t_f		-	128	-	
Internal emitter inductance	L_E	Between lead and center of die contact	-	5.0	-	nH
Input capacitance	C_{ies}	$V_{GE} = 0\text{ V}$, $V_{CC} = 25\text{ V}$, $f = 1.0\text{ MHz}$	-	24 200	-	pF
Output capacitance	C_{oes}		-	300	-	
Reverse transfer capacitance	C_{res}		-	84	-	
Reverse bias safe operating area	RBSOA	$T_J = 175\text{ }^{\circ}\text{C}$, $I_C = 250\text{ A}$, $R_g = 5.0\text{ }\Omega$, $V_{GE} = 15\text{ V}$ to 0 V , $V_{CC} = 400\text{ V}$, $V_p = 600\text{ V}$	Fullsquare			

THERMAL AND MECHANICAL SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Junction and storage temperature range	T_J , T_{Stg}		-40	-	175	$^{\circ}\text{C}$
Thermal resistance junction to case	R_{thJC}		-	-	0.2	$^{\circ}\text{C/W}$
Thermal resistance case to heatsink	R_{thCS}	Flat, greased surface	-	0.05	-	
Weight			-	30	-	g
Mounting torque		Torque to terminal	-	-	1.1 (9.7)	Nm (lbf.in)
		Torque to heatsink	-	-	1.8 (15.9)	Nm (lbf.in)
Case style		SOT-227				

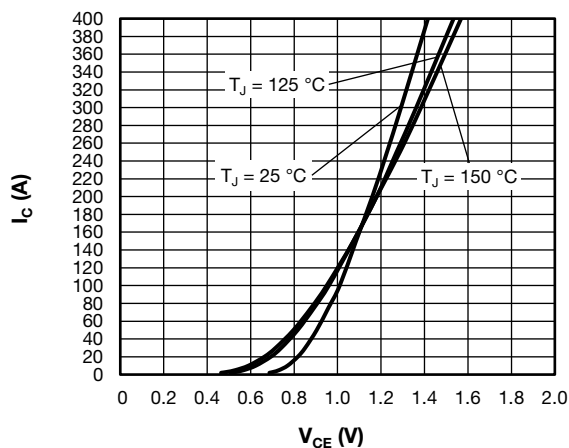


Fig. 1 - Typical Trench IGBT Output Characteristics, $V_{GE} = 15\text{ V}$

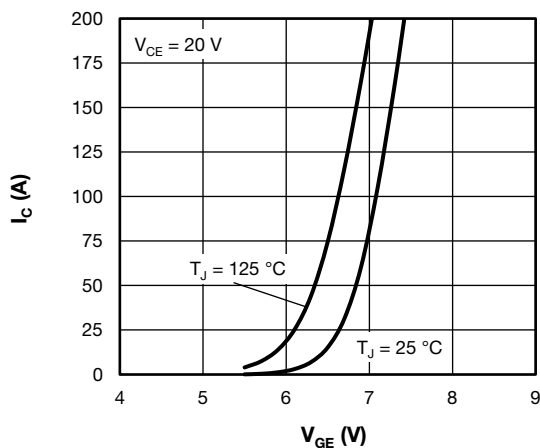


Fig. 4 - Typical Trench IGBT Transfer Characteristics

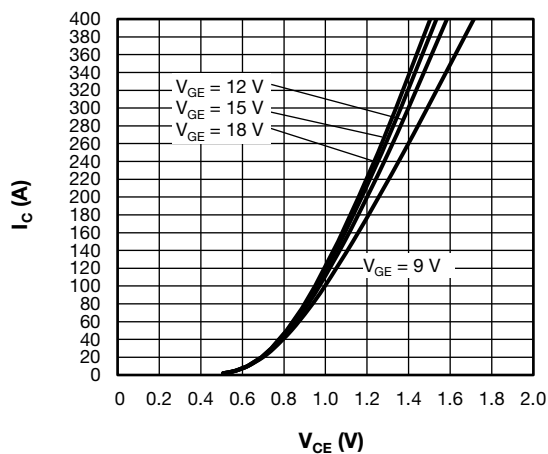


Fig. 2 - Typical Trench IGBT Output Characteristics, $T_J = 125\text{ °C}$

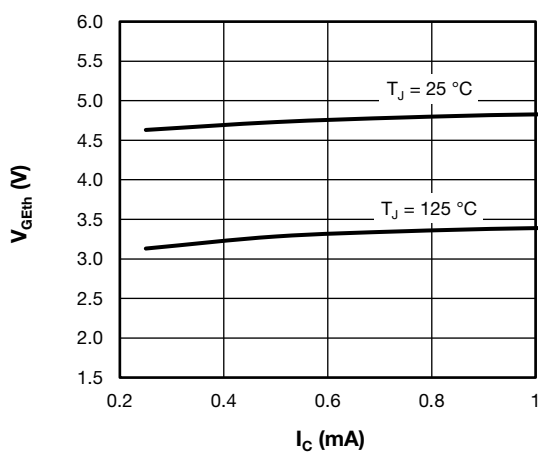


Fig. 5 - Typical Trench IGBT Gate Threshold Voltage

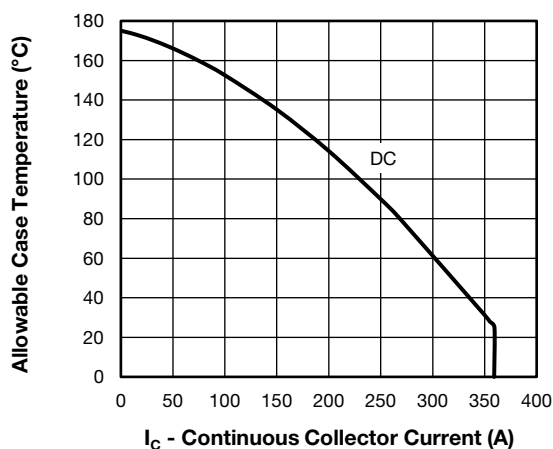


Fig. 3 - Typical Trench IGBT
Continuous Collector Current vs. Case Temperature

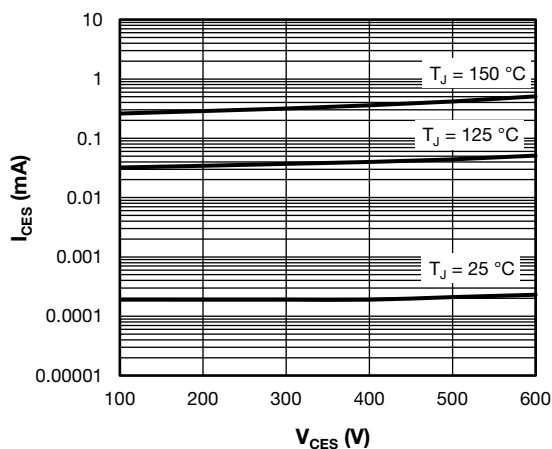


Fig. 6 - Typical Trench IGBT Zero Gate Voltage Collector Current

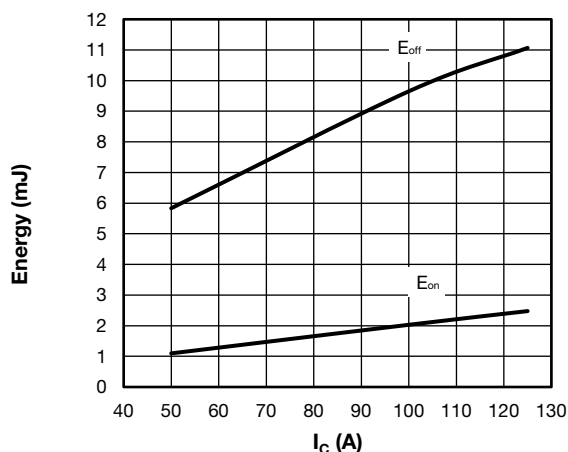


Fig. 7 - Typical Trench IGBT Energy Loss vs. I_C
 $T_J = 125^\circ\text{C}$, $V_{CC} = 480\text{ V}$, $R_g = 5\ \Omega$, $V_{GE} = +15\text{ V}/-15\text{ V}$, $L = 500\ \mu\text{H}$

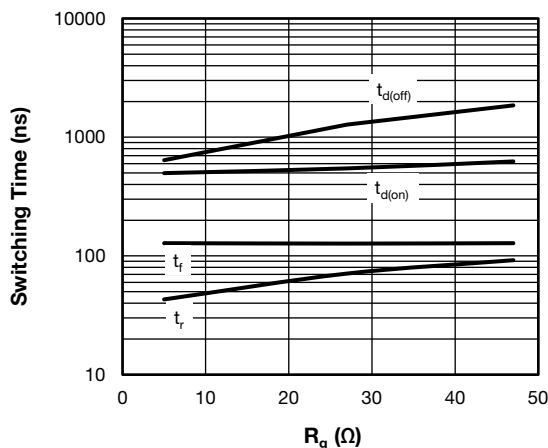


Fig. 10 - Typical Trench IGBT Switching Time vs. R_g
 $T_J = 125^\circ\text{C}$, $V_{CC} = 480\text{ V}$, $I_C = 100\text{ A}$, $V_{GE} = +15\text{ V}/-15\text{ V}$, $L = 500\ \mu\text{H}$

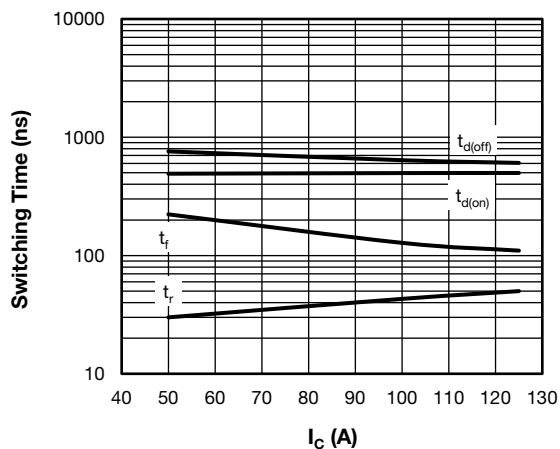


Fig. 8 - Typical Trench IGBT Switching Time vs. I_C
 $T_J = 125^\circ\text{C}$, $V_{CC} = 480\text{ V}$, $R_g = 5\ \Omega$, $V_{GE} = +15\text{ V}/-15\text{ V}$, $L = 500\ \mu\text{H}$

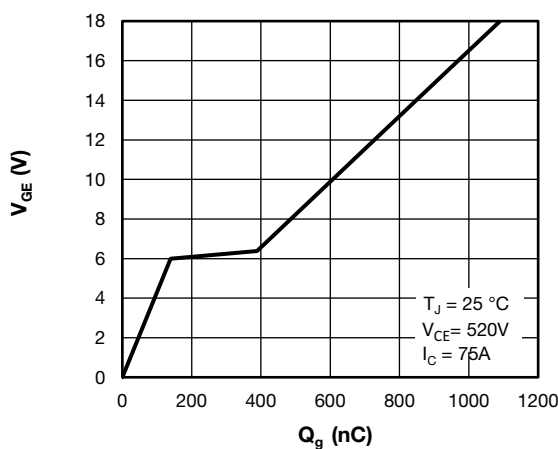


Fig. 11 - Typical Trench IGBT
 Gate Charge vs. Gate to Emitter Voltage

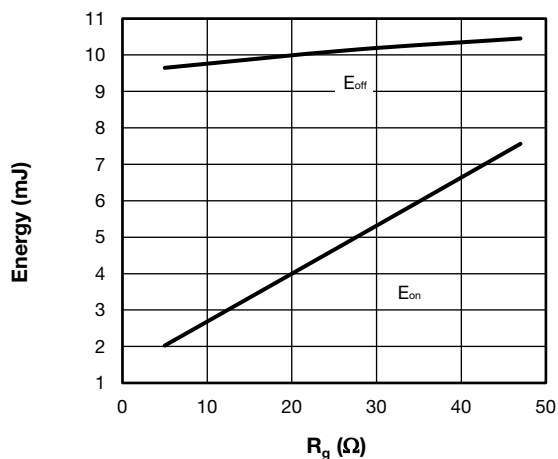


Fig. 9 - Typical Trench IGBT Energy Loss vs. R_g
 $T_J = 125^\circ\text{C}$, $V_{CC} = 480\text{ V}$, $I_C = 100\text{ A}$, $V_{GE} = +15\text{ V}/-15\text{ V}$, $L = 500\ \mu\text{H}$

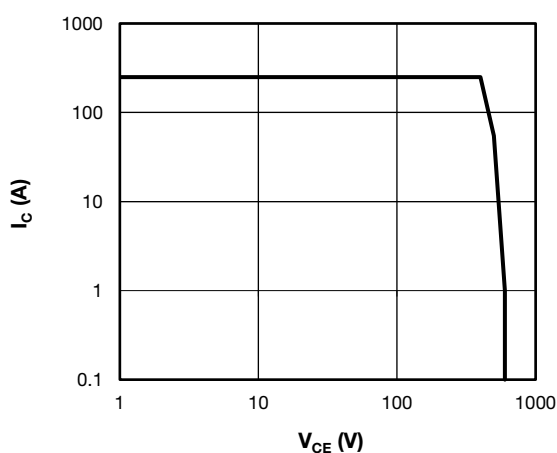


Fig. 12 - Typical Trench IGBT Reverse BIAS SOA
 $T_J = 175^\circ\text{C}$, $I_C = 250\text{ A}$, $R_g = 4.7\ \Omega$, $V_{GE} = +15\text{ V}/0\text{ V}$,
 $V_{CC} = 400\text{ V}$, $V_p = 600\text{ V}$



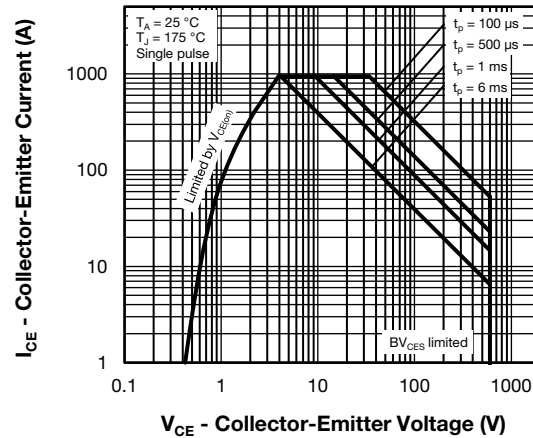


Fig. 13 - Typical Trench IGBT Safe Operating Area


Fig. 14 - Maximum Thermal Impedance Z_{thJC} Characteristics

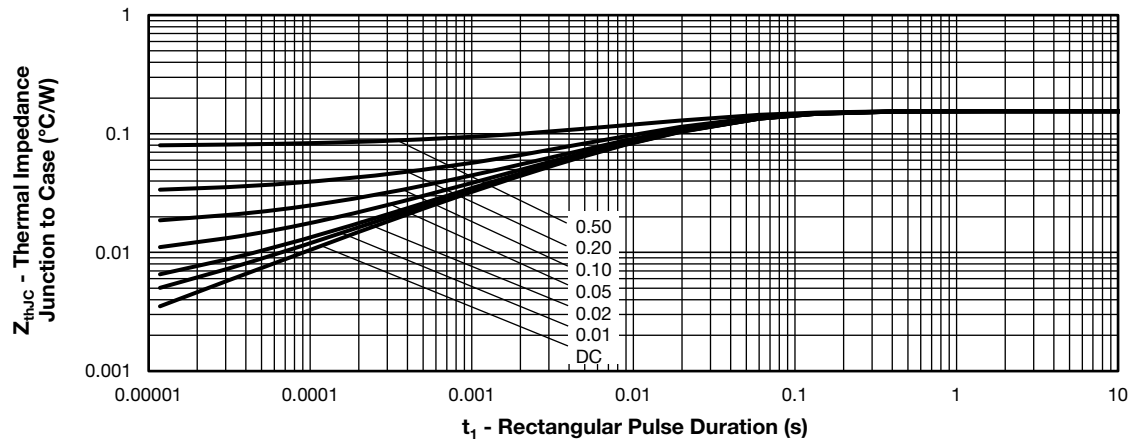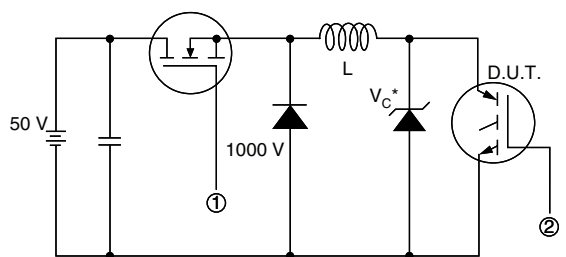

* Driver same type as D.U.T.; $V_C = 80\%$ of V_{CE} (max)

Note: Due to the 50 V power supply, pulse width and inductor will increase to obtain rated I_d


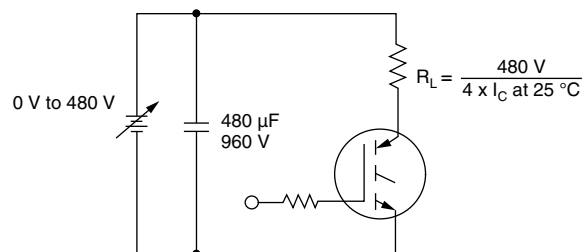


Fig. 15 - Clamped Inductive Load Test Circuit

Fig. 16 - Pulsed Collector Current Test Circuit

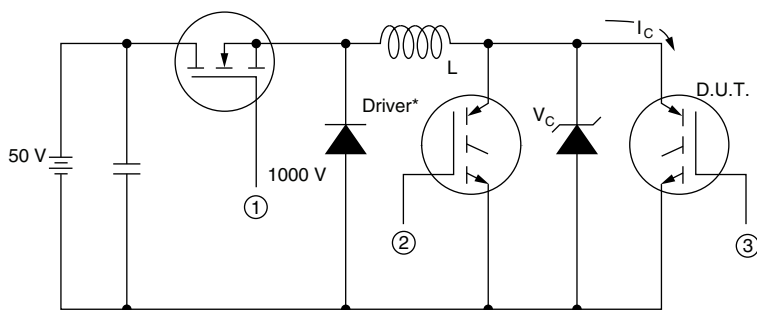

* Driver same type as D.U.T., $V_C = 480\text{ V}$

Fig. 17 - Switching Lost Test Circuit



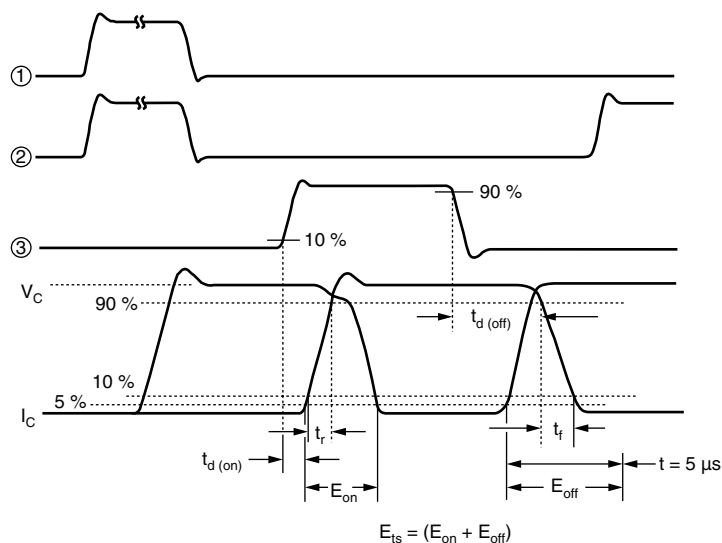


Fig. 18 - Switching Loss Waveforms

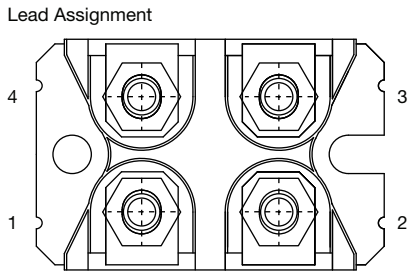

ORDERING INFORMATION TABLE


Device code	VS-	G	T	250	S	A	60	S
	1	2	3	4	5	6	7	8
1	Vishay Semiconductors product							
2	Insulated gate bipolar transistor (IGBT)							
3	Trench IGBT silicon							
4	Current rating (250 = 250 A)							
5	Circuit configuration (S = single switch no diode)							
6	Package indicator (A = SOT-227)							
7	Voltage rating (60 = 600 V)							
8	Speed/type (S = standard speed)							

CIRCUIT CONFIGURATION		
CIRCUIT	CIRCUIT CONFIGURATION CODE	CIRCUIT DRAWING
Single switch, no diode	S	 

LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95423
Packaging information	www.vishay.com/doc?95425

SOT-227 Generation 2

DIMENSIONS in millimeters (inches)

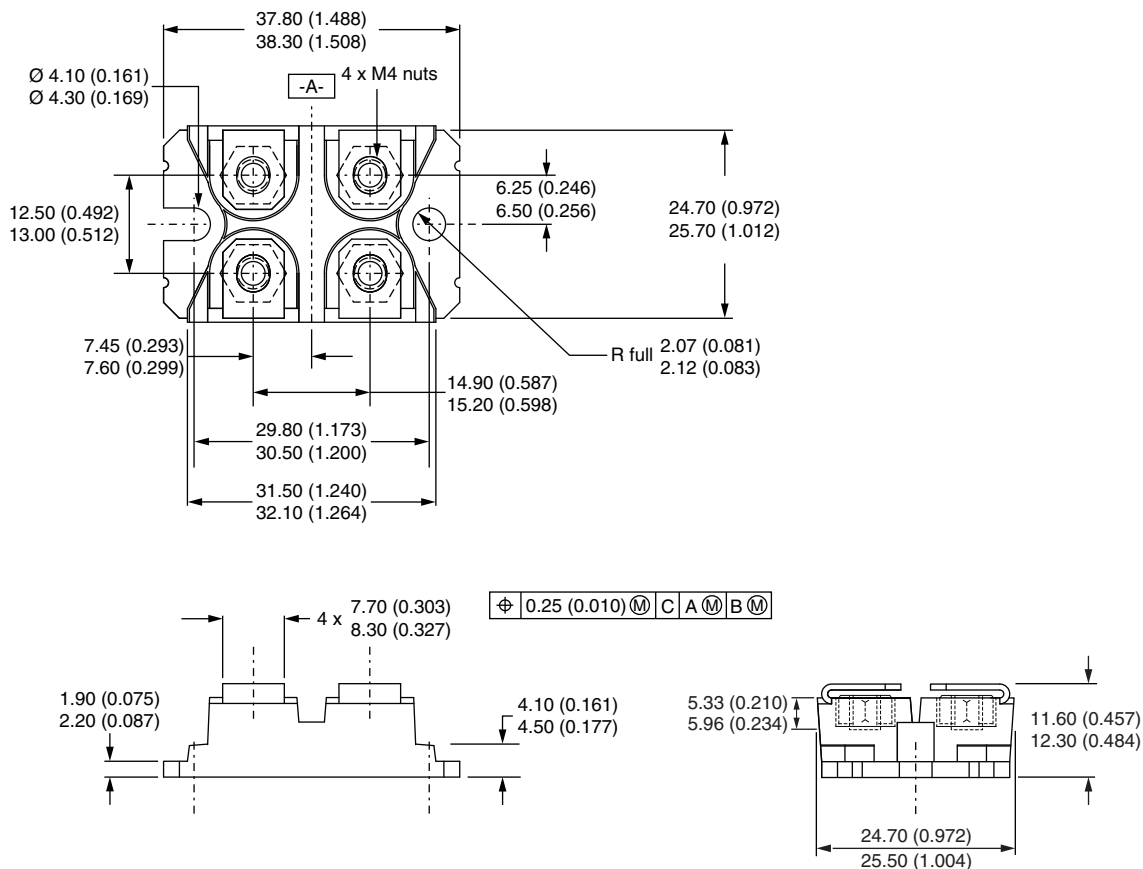

Note

- Controlling dimension: millimeter



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.