

# Ultrafast Rectifier, 30 A FRED Pt®





TO-247AC 3L




TO-247AC 2L




VS-APU3006-N3




VS-EPU3006-N3

## FEATURES

- Low forward voltage drop
- Ultrafast recovery time
- 175 °C operating junction temperature
- Designed and qualified according to JEDEC®-JESD 47
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free
RoHS COMPLIANT
HALOGEN FREE Available

## DESCRIPTION

Ultralow $V_F$, soft-switching ultrafast rectifiers optimized for Discontinuous (Critical) Mode (DCM) Power Factor Correction (PFC).

The minimized conduction loss, optimized stored charge and low recovery current minimized the switching losses and reduce over dissipation in the switching element and snubbers.

The device is also intended for use as a freewheeling diode in power supplies and other power switching applications.

## APPLICATIONS

AC/DC SMPS 70 W to 400 W

e.g. laptop and printer AC adaptors, desktop PC, TV and monitor, games units, and DVD AC/DC power supplies.

| PRIMARY CHARACTERISTICS | |
|---|---|
| $I_{F(AV)}$ | 30 A |
| $V_R$ | 600 V |
| $V_F$ at $I_F$ | 1.15 V |
| $t_{rr}$ typ. | 30 ns |
| $T_J$ max. | 175 °C |
| Package | TO-247AC 3L, TO-247AC 2L |
| Circuit configuration | Single |

| ABSOLUTE MAXIMUM RATINGS | | | | |
|---|---|---|---|---|
| PARAMETER | SYMBOL | TEST CONDITIONS | MAX. | UNITS |
| Repetitive peak reverse voltage | $V_{RRM}$ | | 600 | V |
| Average rectified forward current | $I_{F(AV)}$ | $T_C$ = 127 °C | 30 | A |
| Non-repetitive peak surge current | $I_{FSM}$ | $T_C$ = 25 °C, $t_p$ = 10 ms | 220 | |
| Operating junction and storage temperatures | $T_J$, $T_{Stg}$ | | -65 to +175 | °C |

| ELECTRICAL SPECIFICATIONS ($T_J$ = 25 °C unless otherwise specified) | | | | | | |
|---|---|---|---|---|---|---|
| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNITS |
| Breakdown voltage, blocking voltage | $V_{BR}$, $V_R$ | $I_R$ = 100 µA | 600 | - | - | V |
| Forward voltage | $V_F$ | $I_F$ = 30 A | - | 1.4 | 2 | |
| | | $I_F$ = 30 A, $T_J$ = 150 °C | - | 1.15 | 1.35 | |
| Reverse leakage current | $I_R$ | $V_R$ = $V_R$ rated | - | - | 30 | µA |
| | | $T_J$ = 150 °C, $V_R$ = $V_R$ rated | - | - | 250 | |
| Junction capacitance | $C_T$ | $V_R$ = 600 V | - | 20 | - | pF |
| Series inductance | $L_S$ | Measured lead to lead 5 mm from package body | - | 8.0 | - | nH |



For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

| DYNAMIC RECOVERY CHARACTERISTICS ($T_J$ = 25 °C unless otherwise specified) | | | | | | | |
|---|---|---|---|---|---|---|---|
| **PARAMETER** | **SYMBOL** | **TEST CONDITIONS** | | **MIN.** | **TYP.** | **MAX.** | **UNITS** |
| Reverse recovery time | $t_{rr}$ | $I_F$ = 1 A, $dI_F/dt$ = 50 A/µs, $V_R$ = 30 V | | - | 30 | 45 | ns |
| | | $T_J$ = 25 °C | $I_F$ = 30 A<br>$dI_F/dt$ = 200 A/µs<br>$V_R$ = 200 V | - | 45 | - | |
| | | $T_J$ = 125 °C | | - | 100 | - | |
| Peak recovery current | $I_{RRM}$ | $T_J$ = 25 °C | | - | 5.6 | - | A |
| | | $T_J$ = 125 °C | | - | 10 | - | |
| Reverse recovery charge | $Q_{rr}$ | $T_J$ = 25 °C | | - | 127 | - | nC |
| | | $T_J$ = 125 °C | | - | 580 | - | |

| THERMAL - MECHANICAL SPECIFICATIONS | | | | | | |
|---|---|---|---|---|---|---|
| **PARAMETER** | **SYMBOL** | **TEST CONDITIONS** | **MIN.** | **TYP.** | **MAX.** | **UNITS** |
| Maximum junction and storage temperature range | $T_J$, $T_{Stg}$ | | -65 | - | 175 | °C |
| Thermal resistance, junction to case | $R_{thJC}$ | | - | 0.7 | 1.1 | °C/W |
| Thermal resistance, junction to ambient per leg | $R_{thJA}$ | Typical socket mount | - | - | 40 | |
| Thermal resistance, case to heatsink | $R_{thCS}$ | Mounting surface, flat, smooth, and greased | - | 0.5 | - | |
| Weight | | | - | 2.0 | - | g |
| | | | - | 0.07 | - | oz. |
| Mounting torque | | | 1.2 (10) | - | 2.4 (20) | kgf · cm (lbf · in) |
| Marking device | | Case style TO-247AC 3L | APU3006 | | | |
| | | Case style TO-247AC 2L | EPU3006 | | | |

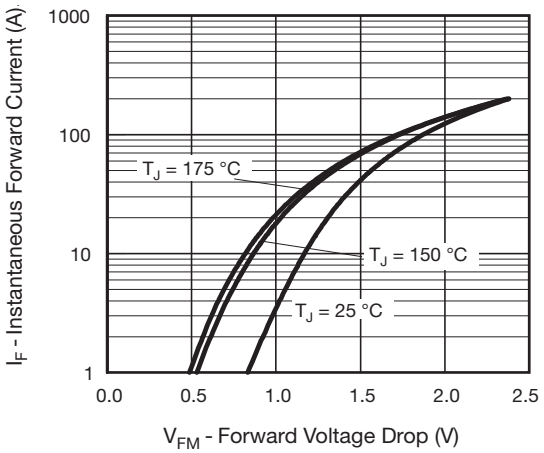



Fig. 1 - Typical Forward Voltage Drop Characteristics

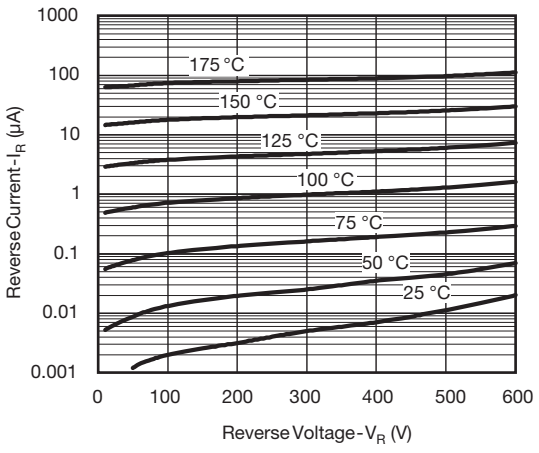



Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage


For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

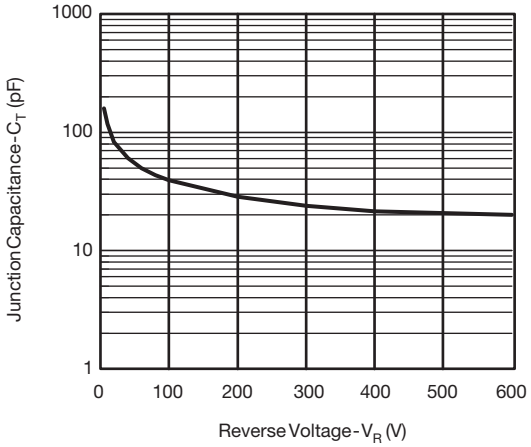



Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

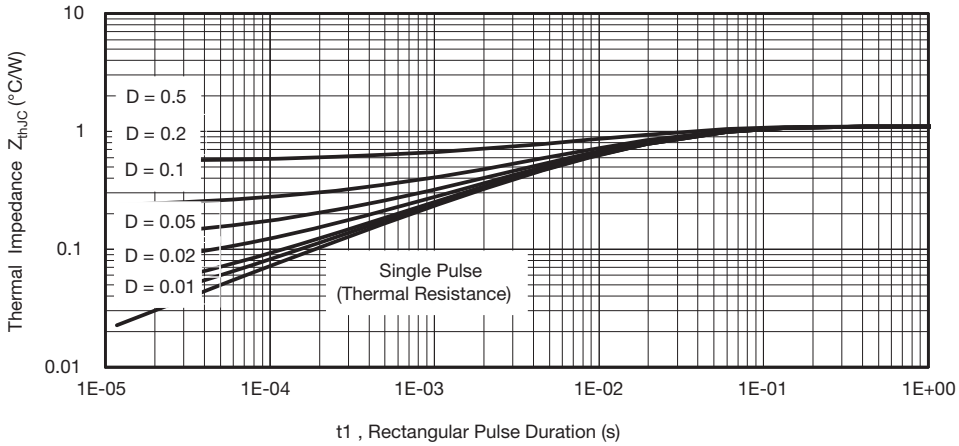



Fig. 4 - Max. Thermal Impedance $Z_{thJC}$ Characteristics

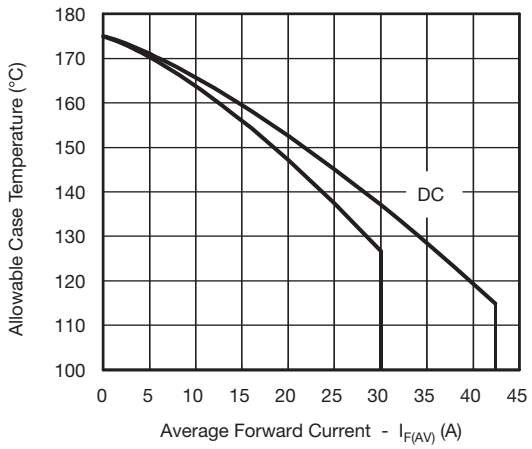



Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current

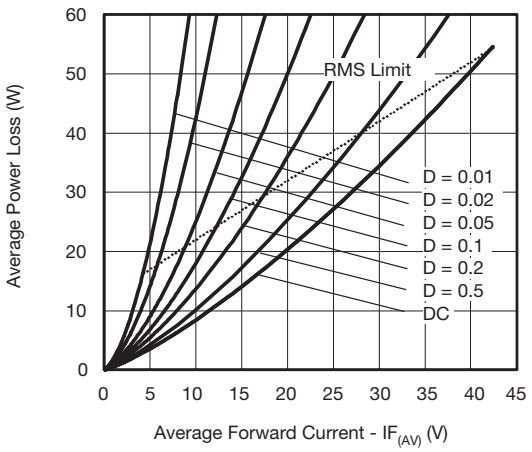



Fig. 6 - Forward Power Loss Characteristics


For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

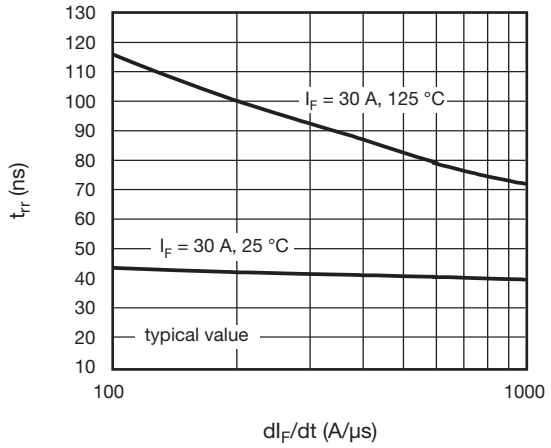



Fig. 7 - Typical Reverse Recovery Time vs. $dI_F/dt$


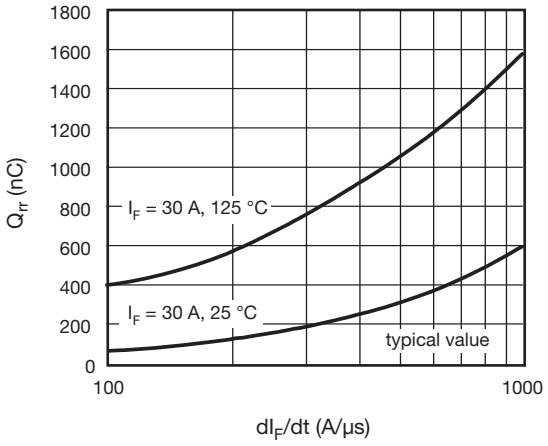



Fig. 8 - Typical Stored Charge vs. $dI_F/dt$

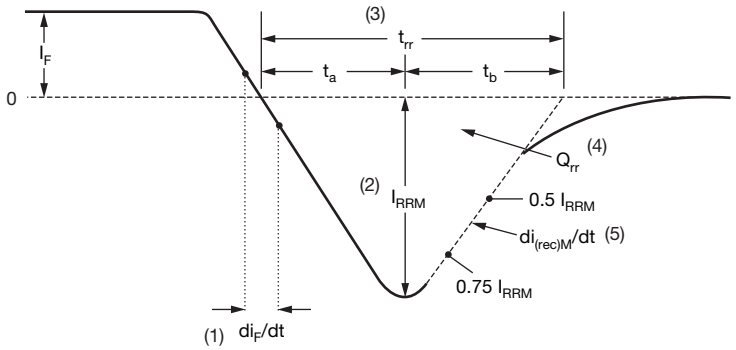


(1) $di_F/dt$ - rate of change of current through zero crossing

(2) $I_{RRM}$ - peak reverse recovery current

(3) $t_{rr}$ - reverse recovery time measured from zero crossing point of negative going $I_F$ to point where a line passing through 0.75 $I_{RRM}$ and 0.50 $I_{RRM}$ extrapolated to zero current.

(4) $Q_{rr}$ - area under curve defined by $t_{rr}$ and $I_{RRM}$

$$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$


(5) $di_{(rec)M}/dt$ - peak rate of change of current during $t_b$ portion of $t_{rr}$

Fig. 9 - Reverse Recovery Waveform and Definitions


For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

## ORDERING INFORMATION TABLE

**Device code**

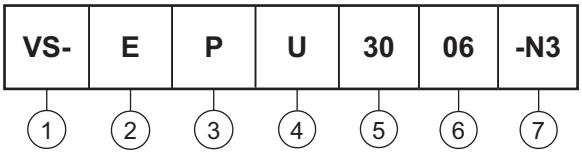


1 - Vishay Semiconductors product

2 - Circuit configuration
- E = single diode, 2 pins
- A = single diode, 3 pins

3 - P = TO-247AC

4 - U = ultrafast recovery time

5 - Current code (30 = 30 A)

6 - Voltage code (06 = 600 V)

7 - Environmental digit:

-N3 = halogen-free, RoHS-compliant and totally lead (Pb)-free


| **ORDERING INFORMATION** (Example) | | | |
|---|---|---|---|
| **PREFERRED P/N** | **QUANTITY PER TUBE** | **MINIMUM ORDER QUANTITY** | **PACKAGING DESCRIPTION** |
| VS-APU3006-N3 | 25 | 500 | Antistatic plastic tube |
| VS-EPU3006-N3 | 25 | 500 | Antistatic plastic tube |

| **LINKS TO RELATED DOCUMENTS** | | |
|---|---|---|
| Dimensions | TO-247AC 3L | www.vishay.com/doc?96138 |
| | TO-247AC 2L | www.vishay.com/doc?96144 |
| Part marking information | TO-247AC 3L | www.vishay.com/doc?95007 |
| | TO-247AC 2L | www.vishay.com/doc?95442 |


For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

# TO-247AC 3L

**DIMENSIONS** in millimeters and inches

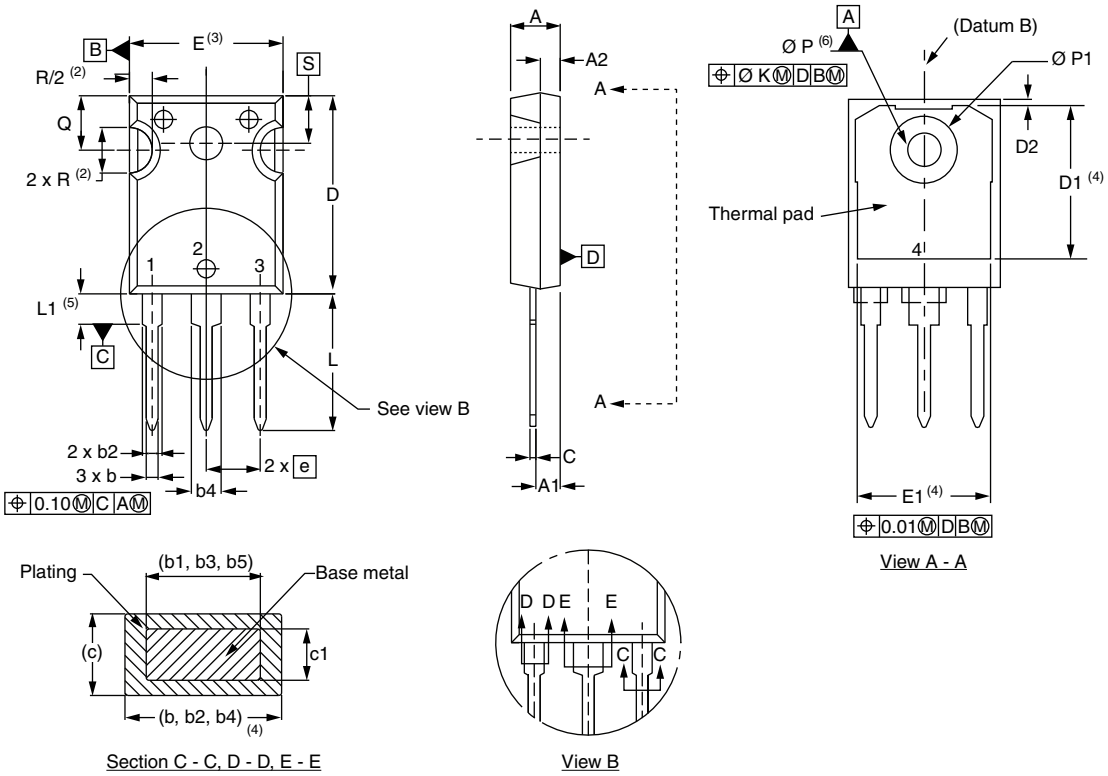


| SYMBOL | MILLIMETERS | | INCHES | | NOTES |
|---|---|---|---|---|---|
| | MIN. | MAX. | MIN. | MAX. | |
| A | 4.65 | 5.31 | 0.183 | 0.209 | |
| A1 | 2.21 | 2.59 | 0.087 | 0.102 | |
| A2 | 1.17 | 1.37 | 0.046 | 0.054 | |
| b | 0.99 | 1.40 | 0.039 | 0.055 | |
| b1 | 0.99 | 1.35 | 0.039 | 0.053 | |
| b2 | 1.65 | 2.39 | 0.065 | 0.094 | |
| b3 | 1.65 | 2.34 | 0.065 | 0.092 | |
| b4 | 2.59 | 3.43 | 0.102 | 0.135 | |
| b5 | 2.59 | 3.38 | 0.102 | 0.133 | |
| c | 0.38 | 0.89 | 0.015 | 0.035 | |
| c1 | 0.38 | 0.84 | 0.015 | 0.033 | |
| D | 19.71 | 20.70 | 0.776 | 0.815 | 3 |
| D1 | 13.08 | - | 0.515 | - | 4 |

| SYMBOL | MILLIMETERS | | INCHES | | NOTES |
|---|---|---|---|---|---|
| | MIN. | MAX. | MIN. | MAX. | |
| D2 | 0.51 | 1.35 | 0.020 | 0.053 | |
| E | 15.29 | 15.87 | 0.602 | 0.625 | 3 |
| E1 | 13.46 | - | 0.53 | - | |
| e | 5.46 BSC | | 0.215 BSC | | |
| Ø K | 0.254 | | 0.010 | | |
| L | 14.20 | 16.10 | 0.559 | 0.634 | |
| L1 | 3.71 | 4.29 | 0.146 | 0.169 | |
| Ø P | 3.56 | 3.66 | 0.14 | 0.144 | |
| Ø P1 | - | 7.39 | - | 0.291 | |
| Q | 5.31 | 5.69 | 0.209 | 0.224 | |
| R | 4.52 | 5.49 | 0.178 | 0.216 | |
| S | 5.51 BSC | | 0.217 BSC | | |

**Notes**

(1) Dimensioning and tolerancing per ASME Y14.5M-1994

(2) Contour of slot optional

(3) Dimension D and E do not include mold flash. Mold flash shall not exceed 0.127 mm (0.005") per side. These dimensions are measured at the outermost extremes of the plastic body

(4) Thermal pad contour optional with dimensions D1 and E1

(5) Lead finish uncontrolled in L1

(6) Ø P to have a maximum draft angle of 1.5 to the top of the part with a maximum hole diameter of 3.91 mm (0.154")

(7) Outline conforms to JEDEC® outline TO-247 with exception of dimension Q




For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

# TO-247AC 2L

**DIMENSIONS** in millimeters and inches

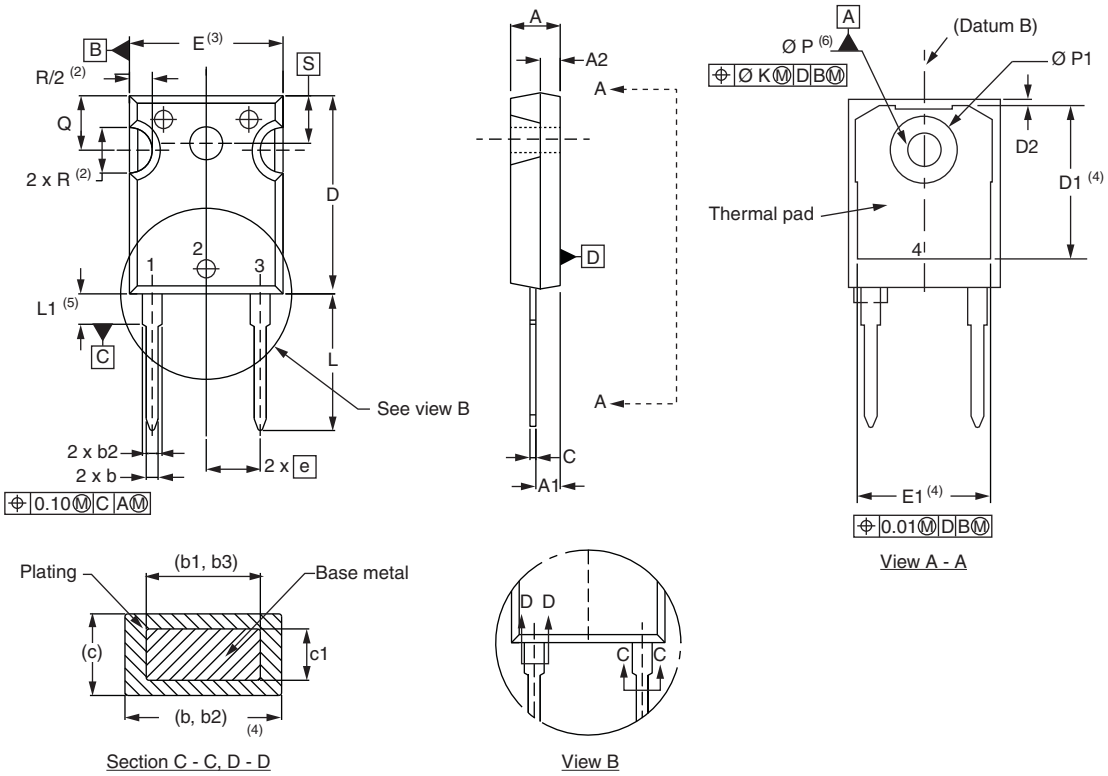


| SYMBOL | MILLIMETERS | | INCHES | | NOTES |
|---|---|---|---|---|---|
| | MIN. | MAX. | MIN. | MAX. | |
| A | 4.65 | 5.31 | 0.183 | 0.209 | |
| A1 | 2.21 | 2.59 | 0.087 | 0.102 | |
| A2 | 1.17 | 1.37 | 0.046 | 0.054 | |
| b | 0.99 | 1.40 | 0.039 | 0.055 | |
| b1 | 0.99 | 1.35 | 0.039 | 0.053 | |
| b2 | 1.65 | 2.39 | 0.065 | 0.094 | |
| b3 | 1.65 | 2.34 | 0.065 | 0.092 | |
| c | 0.38 | 0.89 | 0.015 | 0.035 | |
| c1 | 0.38 | 0.84 | 0.015 | 0.033 | |
| D | 19.71 | 20.70 | 0.776 | 0.815 | 3 |
| D1 | 13.08 | - | 0.515 | - | 4 |
| D2 | 0.51 | 1.35 | 0.020 | 0.053 | |

| SYMBOL | MILLIMETERS | | INCHES | | NOTES |
|---|---|---|---|---|---|
| | MIN. | MAX. | MIN. | MAX. | |
| E | 15.29 | 15.87 | 0.602 | 0.625 | 3 |
| E1 | 13.46 | - | 0.53 | - | |
| e | 5.46 BSC | | 0.215 BSC | | |
| Ø K | 0.254 | | 0.010 | | |
| L | 14.20 | 16.10 | 0.559 | 0.634 | |
| L1 | 3.71 | 4.29 | 0.146 | 0.169 | |
| Ø P | 3.56 | 3.66 | 0.14 | 0.144 | |
| Ø P1 | - | 7.39 | - | 0.291 | |
| Q | 5.31 | 5.69 | 0.209 | 0.224 | |
| R | 4.52 | 5.49 | 0.178 | 0.216 | |
| S | 5.51 BSC | | 0.217 BSC | | |

**Notes**

(1) Dimensioning and tolerancing per ASME Y14.5M-1994

(2) Contour of slot optional

(3) Dimension D and E do not include mold flash. Mold flash shall not exceed 0.127 mm (0.005") per side. These dimensions are measured at the outermost extremes of the plastic body

(4) Thermal pad contour optional with dimensions D1 and E1

(5) Lead finish uncontrolled in L1

(6) Ø P to have a maximum draft angle of 1.5 to the top of the part with a maximum hole diameter of 3.91 mm (0.154")

(7) Outline conforms to JEDEC® outline TO-247 with exception of dimension Q



For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

***© 2025 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED***



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000