

2N2906A, L, UA, UB

2N2907A, L, UA, UB



Radiation Hardened PNP Silicon Switching Transistors


Rev. V4

Features

- Qualified to MIL-PRF-19500/291
- Available in JAN, JANTX, JANTXV, JANS and JANSR
- Rad Hard Levels M, D, P, L and R
- TO-18, Surface Mount UA & UB Packages

Applications

- Switching and Linear Applications
- DC and VHF Amplifier Applications

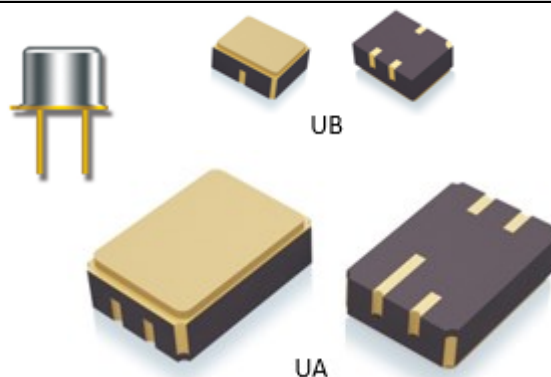

Electrical Specifications ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Test Conditions	Symbol	Units	Minimum	Maximum
Collector - Emitter Breakdown	$I_C = -10 \text{ mA dc}$	$V_{(BR)CEO}$	V dc	-60	—
Collector - Base Cutoff Current	$V_{CB} = -60 \text{ V dc}$ $V_{CB} = -50 \text{ V dc}$	I_{CBO1} I_{CBO2}	$\mu\text{A dc}$ nA dc	—	-10 -10
Emitter - Base Cutoff Current	$V_{EB} = -5.0 \text{ V dc}$ $V_{EB} = -4.0 \text{ V dc}$	I_{EBO1} I_{EBO2}	$\mu\text{A dc}$ nA dc	—	-10 -50
Collector - Emitter Cutoff Current	$V_{CE} = -50 \text{ V dc}$	I_{CES}	nA dc	—	-50
Forward Current Transfer Ratio	2N2906A, L, UA, UB $V_{CE} = -10 \text{ V dc}; I_C = -0.1 \text{ mA dc}$ $V_{CE} = -10 \text{ V dc}; I_C = -1.0 \text{ mA dc}$ $V_{CE} = -10 \text{ V dc}; I_C = -10.0 \text{ mA dc}$ $V_{CE} = -10 \text{ V dc}; I_C = -150.0 \text{ mA dc}$ $V_{CE} = -10 \text{ V dc}; I_C = -500.0 \text{ mA dc}$ 2N2907A, L, UA, UB $V_{CE} = -10 \text{ V dc}; I_C = -0.1 \text{ mA dc}$ $V_{CE} = -10 \text{ V dc}; I_C = -1.0 \text{ mA dc}$ $V_{CE} = -10 \text{ V dc}; I_C = -10.0 \text{ mA dc}$ $V_{CE} = -10 \text{ V dc}; I_C = -150.0 \text{ mA dc}$ $V_{CE} = -10 \text{ V dc}; I_C = -500.0 \text{ mA dc}$	h_{FE}		40 40 40 40 40 40 75 100 100 100 50	— 175 — 120 — — 450 — 300 —
Collector - Base Cutoff Current	$I_C = -150 \text{ mA dc}, I_B = -15 \text{ mA dc}$ $I_C = -500 \text{ mA dc}, I_B = -50 \text{ mA dc}$	$V_{CE(sat)1}$ $V_{CE(sat)2}$	V dc	—	-0.4 -1.6
Base - Emitter Saturation Voltage	$I_C = -150 \text{ mA dc}, I_B = -15 \text{ mA dc}$ $I_C = -500 \text{ mA dc}, I_B = -50 \text{ mA dc}$	$V_{BE(sat)1}$ $V_{BE(sat)2}$	V dc	-0.6 —	-1.3 -2.6
Collector - Base Cutoff Current	$T_A = +150^\circ\text{C}$ $V_{CB} = -50 \text{ V dc}$	I_{CBO3}	$\mu\text{A dc}$	—	-10
Forward Current Transfer Ratio	$T_A = -55^\circ\text{C}$ $V_{CE} = -10 \text{ V dc}; I_C = -10 \text{ mA dc}$ 2N2906A 2N2907A	h_{FE6}	-	20 50	

(Continued next page)

2N2906A, L, UA, UB

2N2907A, L, UA, UB



Radiation Hardened PNP Silicon Switching Transistors

Rev. V4

Electrical Specifications ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Test Conditions	Symbol	Units	Minimum	Maximum
Dynamic Characteristics:					
Small-Signal Short-Circuit Forward Current Transfer Ratio	$V_{CE} = -10\text{ V dc}; I_C = -1.0\text{ mA dc}; f = 1\text{ kHz}$ 2N2906A, L, UA, UB 2N2907A, L, UA, UB	h_{fe}		40 100	—
Magnitude of Small-Signal Short-Circuit, Forward Current Transfer Ratio	$V_{CE} = -20\text{ V dc}; I_C = -20\text{ mA dc}; f = 100\text{ MHz}$	$ h_{fe} $		2.0	—
Open Circuit Output Capacitance	$V_{CB} = -10\text{ V dc}; I_E = 0, 100\text{ kHz} \leq f \leq 1\text{ MHz}$	C_{obo}	pF	—	8
Input Capacitance (Output Open-Circuited)	$V_{EB} = -2.0\text{ V dc}; I_C = 0; 100\text{ kHz} \leq f \leq 1\text{ MHz}$	C_{ibo}	pF	—	30
Switching Characteristics:					
Saturated Turn-On Time	(See figure 16 of MIL-PRF-19500/291)	t_{on}	ns	—	45
Saturated Turn-Off Time	(See Figure 17 of MIL-PRF-19500/291)	t_{off}	ns	—	300

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Ratings	Symbol	Value
Collector - Emitter Voltage	V_{CEO}	-60 V dc
Collector - Base Voltage	V_{CBO}	-60 V dc
Emitter - Base Voltage	V_{EBO}	-5 V dc
Collector Current	I_C	-600 mA dc
Operating & Storage Temperature Range	T_J, T_{STG}	-65°C to $+200^\circ\text{C}$

2N2906A, L, UA, UB

2N2907A, L, UA, UB



Radiation Hardened PNP Silicon Switching Transistors

Rev. V4

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Types	P_T $T_A = +25^\circ\text{C}$ (1) (2)	P_T $T_C = +25^\circ\text{C}$ (1) (2)	P_T $T_{SP(IS)} =$ $+25^\circ\text{C}$ (1) (2)	P_T $T_{SP(AM)} =$ $+25^\circ\text{C}$ (1) (2)	$R_{\theta JA}$ (2) (3)	$R_{\theta JC}$ (2) (3)	$R_{\theta JSP(IS)}$ (2) (3)	$R_{\theta JSP(AM)}$ (2) (3)
	<u>W</u>	<u>W</u>	<u>W</u>	<u>W</u>	<u>$^\circ\text{C/W}$</u>	<u>$^\circ\text{C/W}$</u>	<u>$^\circ\text{C/W}$</u>	<u>$^\circ\text{C/W}$</u>
2N2906A, L,	0.5	1.0	N/A	N/A	325	150	N/A	N/A
2N2907A, L	0.5	1.0	N/A	N/A	325	150	N/A	N/A
2N2906AUA,	(4) 0.5	N/A	1.0	1.5	(4) 325	N/A	110	40
2N2907AUA	(4) 0.5	N/A	1.0	1.5	(4) 325	N/A	110	40
2N2906AUB,	(4) 0.5	N/A	1.0	N/A	(4) 325	N/A	90	N/A
and UBN								
2N2907AUB	(4) 0.5	N/A	1.0	N/A	(4) 325	N/A	90	N/A
and UBN								
2N2906AUBC	(4) 0.5	N/A	1.0	N/A	(4) 325	N/A	90	N/A
and UBCN								
2N2907AUBC	(4) 0.5	N/A	1.0	N/A	(4) 325	N/A	90	N/A
and UBCN								

- (1) For derating, see figures 7, 8, 9, 10 and 11 of MIL-PRF-19500/291
- (2) For abbreviations please see paragraph 3.3 of MIL-PRF-19500/291
- (3) For thermal curves, see figures 12, 13, 14, 15 and 16 of MIL-PRF-19500/291
- (4) For non-thermal conductive PCB or unknown PCB surface mount conditions in free air, substitute figures 7 and 12 for the UA, UB, UBC and UBCN package and use $R_{\theta JA}$

2N2906A, L, UA, UB

2N2907A, L, UA, UB




Radiation Hardened PNP Silicon Switching Transistors

Rev. V4

Outline Drawing (TO-18):

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.178	.195	4.52	4.95	4
CH	.170	.210	4.32	5.33	
HD	.209	.230	5.31	5.84	4
LC	.100 TP		2.54 TP		5
LD	.016	.021	0.41	0.53	6, 7
LL	.500	.750	12.70	19.05	6, 7, 8
LU	.016	.019	0.41	0.48	6, 7
L1		.050		1.27	6, 7
L2	.250		6.35		6, 7
P	.100		2.54		
Q		.030		0.76	4
TL	.028	.048	0.71	1.22	9
TW	.036	.046	0.91	1.17	10
r		.010		0.25	11
α	45° TP		45° TP		5

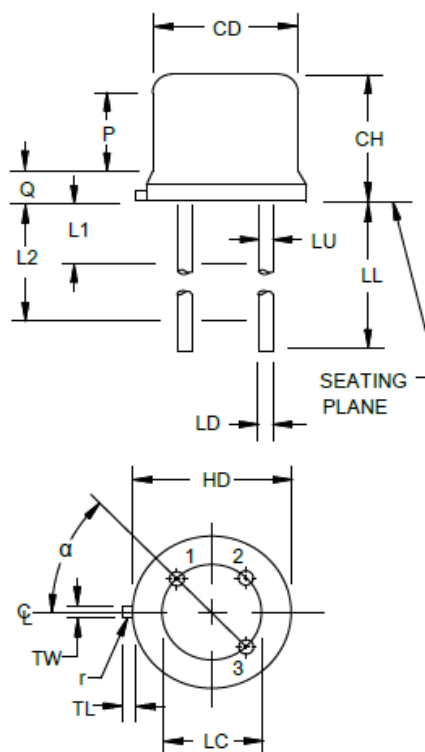

NOTES:

1. Dimension are in inches. Millimeters are given for general information only.
2. Terminal 1 = emitter, terminal 2 = base, terminal 3 = collector.
3. The collector shall be internally connected to the case.
4. Body contour optional within zone defined by dimensions CD, HD, and Q.
5. Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods.
6. Dimension LU applies between dimensions L1 and L2. Dimension LD applies between dimensions L2 and LL minimum. Diameter is uncontrolled in dimension L1 and beyond dimension LL minimum.
7. All three leads.
8. For "L" suffix devices, dimension LL = 1.5 inches (38.10 mm) minimum and 1.75 inches (44.45 mm) maximum.
9. Dimension TL measured from maximum HD.
10. Beyond r (radius) maximum, dimension TW shall be held for a minimum length of .011 inch (0.28 mm).
11. Dimension r (radius) applies to both inside corners of tab.
12. In accordance with ASME Y14.5M, diameters are equivalent to ϕ x symbology.

FIGURE 1. Physical dimensions for TO-206AA package (similar to TO-18).

2N2906A, L, UA, UB


2N2907A, L, UA, UB



Radiation Hardened PNP Silicon Switching Transistors

Rev. V4

Outline Drawing (UA Surface Mount):

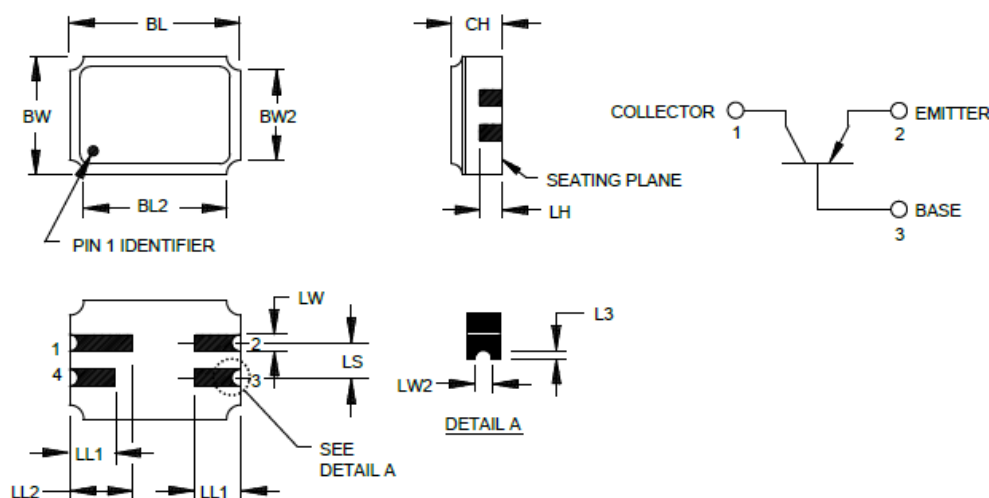

Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
BL	.215	.225	5.46	5.71	
BL2		.225		5.71	
BW	.145	.155	3.68	3.93	
BW2		.155		3.93	
CH	.061	.075	1.55	1.90	3
L3	.003		0.08		5
LH	.029	.042	0.74	1.07	
LL1	.032	.048	0.81	1.22	
LL2	.072	.088	1.83	2.23	
LS	.045	.055	1.14	1.39	
LW	.022	.028	0.56	0.71	
LW2	.006	.022	0.15	0.56	5

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Terminal 1 = collector, terminal 2 = emitter, terminal 3 = base, terminal 4 = not connected.
3. Dimension "CH" controls the overall package thickness. When a window lid is used, dimension "CH" must increase by a minimum of .010 inch (0.254 mm) and a maximum of .040 inch (1.020 mm).
4. The corner shape (square, notch, radius) may vary at the manufacturer's option, from that shown on the drawing.
5. Dimensions "LW2" minimum and "L3" minimum and the appropriate castellation length define an unobstructed three-dimensional space traversing all of the ceramic layers in which a castellation was designed. (Castellations are required on bottom two layers, optional on top ceramic layer.) Dimension "LW2" maximum define the maximum width and depth of the castellation at any point on its surface. Measurement of these dimensions may be made prior to solder dipping.
6. The coplanarity deviation of all terminal contact points, as defined by the device seating plane, shall not exceed .006 inch (0.15 mm) for solder dipped leadless chip carriers.
7. In accordance with ASME Y14.5M, diameters are equivalent to ϕ x symbology.

FIGURE 2. Physical dimensions for 4 terminal SMD package (UA).

2N2906A, L, UA, UB 2N2907A, L, UA, UB



Radiation Hardened PNP Silicon Switching Transistors

Rev. V4

Outline Drawing (UB Surface Mount)

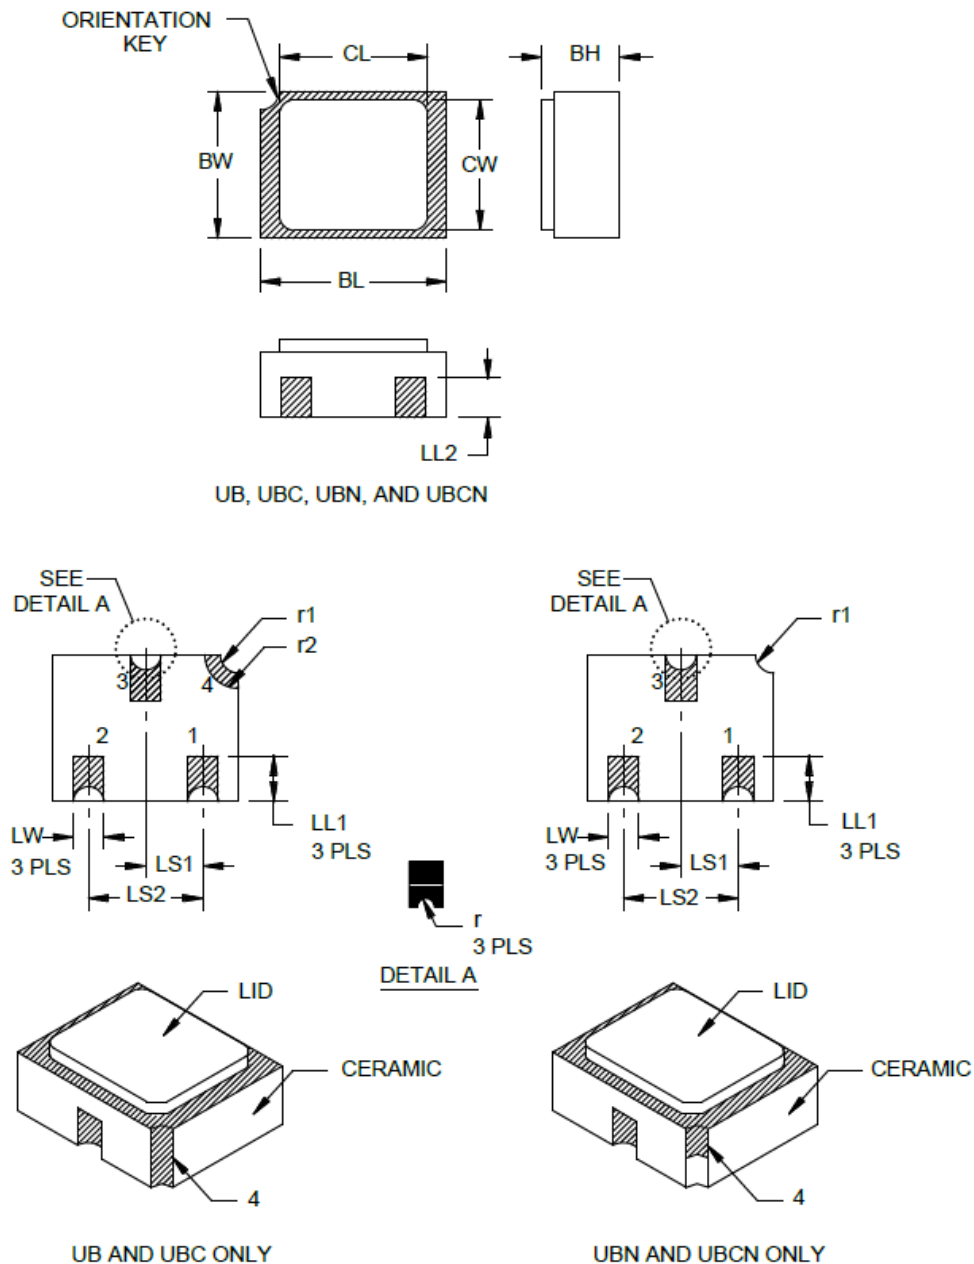


FIGURE 3. Physical dimensions for 3 and 4 terminal SMD packages (UB, UBN, UBC, and UBCN).

2N2906A, L, UA, UB 2N2907A, L, UA, UB



Radiation Hardened PNP Silicon Switching Transistors

Rev. V4

Outline Drawing (UB Surface Mount)

Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
BL	.115	.128	2.92	3.25	
BW	.085	.108	2.16	2.74	
BH	.046	.056	1.17	1.42	UB only, 3
BH	.046	.056	1.17	1.42	UBN only, 4
BH	.055	.069	1.40	1.75	UBC only, 5
BH	.055	.069	1.40	1.75	UBCN only, 6
CL		.128		3.25	
CW		.108		2.74	
LL1	.022	.038	0.56	0.97	3 PLS
LL2	.014	.035	0.356	0.89	3 PLS
LS ₁	.035	.040	0.89	1.02	
LS ₂	.071	.079	1.80	2.01	
LW	.016	.024	0.41	0.61	
r		.008		0.20	5
r1		.012		0.30	7
r2		.022		0.56	UB and UBC only, 7

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Hatched areas on package denote metallized areas.
3. UB only: Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Pad 4 = Shielding connected to the metal lid.
4. UBN only: Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Isolated lid with three pads only.
5. UBC (ceramic lid) only: Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Pad 4 = Shielding connected to the lid.
6. UBCN (ceramic lid) only: Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Isolated lid with 3 pads only.
7. For design reference only.
8. In accordance with ASME Y14.5M, diameters are equivalent to ϕ x symbology.

FIGURE 3. Physical dimensions for 3 and 4 terminal SMD packages (UB, UBN, UBC, and UBCN) – Continued.

VPT COMPONENTS. ALL RIGHTS RESERVED.

Information in this document is provided in connection with VPT Components products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components customers using or selling VPT Components products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.