
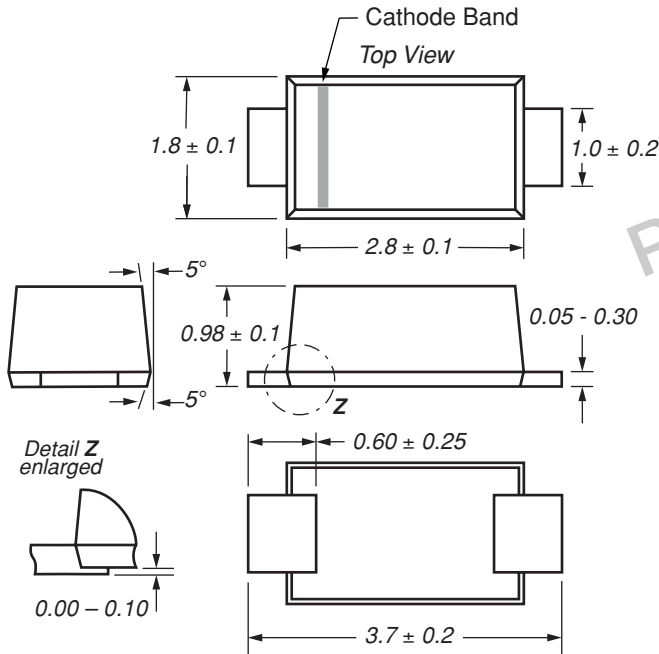
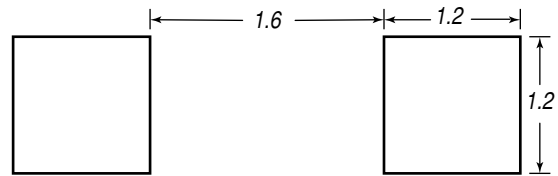


**Zener Diodes****V<sub>Z</sub> Range** 3.6 to 200V  
**TVS V<sub>WM</sub> Range** 6.2 to 160V  
**Power Dissipation** 2.3W**DO-219AB (SMF)**

Patented

**Mounting Pad Layout**

Dimensions in millimeters

**Mechanical Data****Case:** JEDEC DO-219 Plastic Case**Weight:** approx. 0.01g**Packaging codes-options:**

G1-10K per 13" reel (8mm tape), 50K/box

G2-3K per 7" reel (8mm tape), 30K/box

**Features**

- Silicon Planar Power Zener Diodes.
- Low profile surface-mount package.
- Zener and TVS specification.

**Maximum Ratings and Thermal Characteristics** (T<sub>A</sub> = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation at T <sub>L</sub> = 105°C	P <sub>tot</sub>	2.3	W
Power Dissipation at T <sub>A</sub> = 25°C	P <sub>tot</sub>	0.8 <sup>(1)</sup>	W
Non-repetitive peak pulse power dissipation with 100µs square pulse <sup>(2)</sup>	P <sub>ZSM</sub>	300	W
Non-repetitive peak pulse power dissipation with 10/1000µs waveform (BZ027-C7V5 to -C200) <sup>(2)</sup>	P <sub>RSM</sub>	150	W
Thermal Resistance Junction to Ambient Air <sup>(1)</sup>	R <sub>θJA</sub>	188	°C/W
Thermal Resistance Junction to Lead	R <sub>θJL</sub>	30	°C/W
Maximum Junction Temperature	T <sub>j</sub>	175	°C
Storage Temperature Range	T <sub>s</sub>	-65 to +175	°C

**Notes:** (1) Mounted on epoxy-glass PCB with 3 x 3mm Cu pads (≥ 40µm thick)(2) T<sub>j</sub> = 25°C prior to surge

# BZD27 Series

Vishay Semiconductors  
formerly General Semiconductor



## Electrical Characteristics

### Total Series (T<sub>J</sub> = 25°C unless otherwise noted)

Parameter	Symbol	Conditions	Minimum	Maximum	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 0.2A	–	1.2	V

### When used as voltage regulator diodes (T<sub>J</sub> = 25°C unless otherwise noted)

Type	Marking Code	Working Voltage			Differential Resistance		Temperature Coefficient		Test Current	Reverse Current	
		V <sub>Z</sub> (V) @ I <sub>Z</sub>			r <sub>dif</sub> (Ω) @ I <sub>Z</sub>		α <sub>Z</sub> @ I <sub>Z</sub> (%/°C)		I <sub>ZT</sub> (mA)	I <sub>R</sub> (μA) Max	V <sub>R</sub> (V)
		Min.	Nom.	Max.	Typ.	Max.	Min.	Max.			
BZD27-C3V6P	D0	3.4	3.6	3.8	4	8	-0.14	-0.04	100	100	1
BZD27-C3V9P	D1	3.7	3.9	4.1	4	8	-0.14	-0.04	100	50	1
BZD27-C4V3P	D2	4.0	4.3	4.6	4	7	-0.12	-0.02	100	25	1
BZD27-C4V7P	D3	4.4	4.7	5.0	3	7	-0.10	0.00	100	10	1
BZD27-C5V1P	D4	4.8	5.1	5.4	3	6	-0.08	0.02	100	5	1
BZD27-C5V6P	D5	5.2	5.6	6.0	2	4	-0.04	0.04	100	10	2
BZD27-C6V2P	D6	5.8	6.2	6.6	2	3	-0.01	0.06	100	5	2
BZD27-C6V8P	D7	6.4	6.8	7.2	1	3	0.00	0.07	100	10	3
BZD27-C7V5P	D8	7.0	7.5	7.9	1	2	0.00	0.07	100	50	3
BZD27-C8V2P	D9	7.7	8.2	8.7	1	2	0.03	0.08	100	10	3
BZD27-C9V1P	E0	8.5	9.1	9.6	2	4	0.03	0.08	50	10	5
BZD27-C10P	E1	9.4	10	10.6	2	4	0.05	0.09	50	7	7.5
BZD27-C11P	E2	10.4	11	11.6	4	7	0.05	0.10	50	4	8.2
BZD27-C12P	E3	11.4	12	12.7	4	7	0.05	0.10	50	3	9.1
BZD27-C13P	E4	12.4	13	14.1	5	10	0.05	0.10	50	2	10
BZD27-C15P	E5	13.8	15	15.6	5	10	0.05	0.10	50	1	11
BZD27-C16P	E6	15.3	16	17.1	6	15	0.06	0.11	25	1	12
BZD27-C18P	E7	16.8	18	19.1	6	15	0.06	0.11	25	1	13
BZD27-C20P	E8	18.8	20	21.2	6	15	0.06	0.11	25	1	15
BZD27-C22P	E9	20.8	22	23.3	6	15	0.06	0.11	25	1	16
BZD27-C24P	F0	22.8	24	25.6	7	15	0.06	0.11	25	1	18
BZD27-C27P	F1	25.1	27	28.9	7	15	0.06	0.11	25	1	20
BZD27-C30P	F2	28	30	32	8	15	0.06	0.11	25	1	22
BZD27-C33P	F3	31	33	35	8	15	0.06	0.11	25	1	24
BZD27-C36P	F4	34	36	38	21	40	0.06	0.11	10	1	27
BZD27-C39P	F5	37	39	41	21	40	0.06	0.11	10	1	30
BZD27-C43P	F6	40	43	46	24	45	0.07	0.12	10	1	33
BZD27-C47P	F7	44	47	50	24	45	0.07	0.12	10	1	36



**When used as voltage regulator diodes** ( $T_J = 25^\circ\text{C}$  unless otherwise noted)

at  Type	Marking Code	Working Voltage			Differential Resistance		Temperature Coefficient		Test Current	Reverse Current Reverse Voltage	
		$V_Z$ (V) @ $I_Z$			$r_{dif}$ ( $\Omega$ ) @ $I_Z$		$\alpha_Z$ @ $I_Z$ (%/ $^\circ\text{C}$ )		$I_{ZT}$ (mA)	$I_R$ ( $\mu\text{A}$ ) Max	$V_R$ (V)
		Min.	Nom.	Max.	Typ.	Max.	Min.	Max.			
BZD27-C51P	F8	48	51	54	25	60	0.07	0.12	10	1	39
BZD27-C56P	F9	52	56	60	25	60	0.07	0.12	10	1	43
BZD27-C62P	G0	58	62	66	25	80	0.08	0.13	10	1	47
BZD27-C68P	G1	64	68	72	25	80	0.08	0.13	10	1	51
BZD27-C75P	G2	70	75	79	30	100	0.08	0.13	10	1	56
BZD27-C82P	G3	77	82	87	30	100	0.08	0.13	10	1	62
BZD27-C91P	G4	85	91	96	60	200	0.09	0.13	5	1	68
BZD27-C100P	G5	94	100	106	60	200	0.09	0.13	5	1	75
BZD27-C110P	G6	104	110	116	80	250	0.09	0.13	5	1	82
BZD27-C120P	G7	114	120	127	80	250	0.09	0.13	5	1	91
BZD27-C130P	G8	124	130	141	110	300	0.09	0.13	5	1	100
BZD27-C150P	G9	138	150	156	130	300	0.09	0.13	5	1	110
BZD27-C160P	H0	153	160	171	150	350	0.09	0.13	5	1	120
BZD27-C180P	H1	168	180	191	180	400	0.09	0.13	5	1	130

# BZD27 Series

Vishay Semiconductors  
formerly General Semiconductor



## When used as transient suppressor diodes (T<sub>J</sub> = 25°C unless otherwise noted)

Type	Rev. Breakdown Voltage	Temperature Coefficient		Test Current	Clamping Voltage		Reverse Current at Stand-Off Voltage	
	V <sub>(BR)R</sub> (V) at I <sub>test</sub> Min.	α <sub>Z</sub> @ I <sub>test</sub> (%/°C) Min.	Max.	I <sub>test</sub> (mA)	V <sub>C</sub> (V) Max.	at I <sub>RSM</sub> (A) <sup>(1)</sup>	I <sub>R</sub> (μA) Max.	at V <sub>WM</sub> (V)
BZD27-C7V5P	7.0	0.00	0.07	100	11.3	13.3	1500	6.2
BZD27-C8V2P	7.7	0.03	0.08	100	12.3	12.2	1200	6.8
BZD27-C9V1P	8.5	0.03	0.08	50	13.3	11.3	100	7.5
BZD27-C10P	9.4	0.05	0.09	50	14.8	10.1	20	8.2
BZD27-C11P	10.4	0.05	0.10	50	15.7	9.6	5	9.1
BZD27-C12P	11.4	0.05	0.10	50	17.0	8.8	5	10
BZD27-C13P	12.4	0.05	0.10	50	18.9	7.9	5	11
BZD27-C15P	13.8	0.05	0.10	50	20.9	7.2	5	12
BZD27-C16P	15.3	0.06	0.11	25	22.9	6.6	5	13
BZD27-C18P	16.8	0.06	0.11	25	25.6	5.9	5	15
BZD27-C20P	18.8	0.06	0.11	25	28.4	5.3	5	16
BZD27-C22P	20.8	0.06	0.11	25	31.0	4.8	5	18
BZD27-C24P	22.8	0.06	0.11	25	33.8	4.4	5	20
BZD27-C27P	25.1	0.06	0.11	25	38.1	3.9	5	22
BZD27-C30P	28	0.06	0.11	25	42.2	3.6	5	24
BZD27-C33P	31	0.06	0.11	25	46.2	3.2	5	27
BZD27-C36P	34	0.06	0.11	10	50.1	3.0	5	30
BZD27-C39P	37	0.06	0.11	10	54.1	2.8	5	33
BZD27-C43P	40	0.07	0.12	10	60.7	2.5	5	36
BZD27-C47P	44	0.07	0.12	10	65.5	2.3	5	39
BZD27-C51P	48	0.07	0.12	10	70.8	2.1	5	43
BZD27-C56P	52	0.07	0.12	10	78.6	1.9	5	47
BZD27-C62P	58	0.08	0.13	10	86.5	1.7	5	51
BZD27-C68P	64	0.08	0.13	10	94.4	1.6	5	56
BZD27-C75P	70	0.08	0.13	10	103.5	1.5	5	62
BZD27-C82P	77	0.08	0.13	10	114	1.3	5	68
BZD27-C91P	85	0.09	0.13	5	126	1.2	5	75
BZD27-C100P	94	0.09	0.13	5	139	1.1	5	82
BZD27-C110P	104	0.09	0.13	5	152	1.0	5	91
BZD27-C120P	114	0.09	0.13	5	167	0.90	5	100
BZD27-C130P	124	0.09	0.13	5	185	0.81	5	110
BZD27-C150P	138	0.09	0.13	5	204	0.73	5	120
BZD27-C160P	153	0.09	0.13	5	224	0.67	5	130
BZD27-C180P	168	0.09	0.13	5	249	0.60	5	150
BZD27-C200P	188	0.09	0.13	5	276	0.54	5	160

Note: (1) Non-repetitive peak reverse current in accordance with "IEC 60-1, Section 8" (10/1000 μs pulse); see Fig. 8.



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.