

WAZ6 TTA EX
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration


WAS/WAZ6 TTA is a universal signal converter and trip amplifier that can be configured on the PC. Combines the functions of isolation, transmission, linearisation and trip amplification in a single module.

These exceptional characteristics and outstanding configurability combine to make the TTA truly unique. The TTA functions with stability and precision under a wide range of voltages and ambient temperatures. It is compatible with all standard sensor types.

- Universal input signals: temperature signals such as resistance thermometer, thermocouple, potentiometer, frequency transmitter, DC voltage signals and current signals
- Loop-powered or passive input
- Wide-range power supply: 18 – 264 V AC/DC
- User-defined linearization
- Inputs and outputs can be configured on PC
- Combined analogue and relay output
- Ambient temperature range: -40 °C ...70 °C

The CBX200 USB interface is used to connect to the PC. The WAS/WAZ6 TTA is also offered as an option with ATEX Zone 2 and UL C1D2 approvals.

General ordering data

Version	Input : EX, universal U, I, R,9, Output : I/U universal, 2 x relays
Order No.	8964320000
Type	WAZ6 TTA EX
GTIN (EAN)	4032248782284
Qty.	1 pc(s).

WAZ6 TTA EX

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	112.4 mm	Depth (inches)	4.425 inch
Width	45 mm	Width (inches)	1.772 inch
Length	100 mm	Length (inches)	3.937 inch
Net weight	280 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
Humidity	5...95 %, no condensation		

Probability of failure

MTTF	138 Jahre
------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Input current	-20...+50 mA (min. interval 0.4 mA)	Input frequency	adjustable, 2 Hz...100 kHz
Input voltage	-200...500 mV (min. 4 mV span), -20...50 V DC (min. 0.5 V span)	Number of inputs	1
Potentiometer	10...50 Ω, 50...100 Ω, 100...200 Ω, 200...400 Ω, 400...800 Ω, 800 Ω...2 kΩ, 2...6.5 kΩ, 6.5...100 Ω	Resistance	10 Ω...5 kΩ
Sensor	Thermocouples: B, E, J, K, L, N, R, S, T (IEC 60584), PT100, PT1000, (EN 60571) Ni100, Ni1000, (JIS1604), Cu10, Cu25, Cu50, Cu100 (DIN 43760) 2-/3-/4-wire	Sensor supply	24 V DC / 22 mA
Temperature input range	Configurable, B: +100...+1820 °C, E: -270...+1000 °C, J: -270...+1200 °C, K: -150...+1372 °C, L: +100...+900 °C, N: -180...+1300 °C, R: -50...+1768 °C, S: -50...+1768 °C, T: -270...+400 °C, U: -200...+600 °C, User defined		

Output (digital)

Continuous current	2 A	Max. switching voltage, AC	250 V
Number of digital outputs	2	Type	2 x 1 CO contact (hard gold-plated), Process alarms (4x) with hysteresis, with alarm delay (configurable) 0...180 s

WAZ6 TTA EX

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Output (analogue)

Load resistance current	< 700 Ω	Load resistance voltage	> 10 k Ω @ 0...10 V / > 20 k Ω @ -10...+10 V
Number of analogue outputs	1	Output current	adjustable between 0 and 20 mA (min. span of 5 mA)
Output voltage	adjustable between -10...+10 V (min. span 2.5 V)	Signal output	direct or inverted
Transmit function	Linear, $x^{1/2}$, $x^{3/2}$, $x^{5/2}$ or user-defined curve (101 points)		

General data

Accuracy	< 0.1 % span (DC, RTD); 0.2 % span (or 1 °C) + CJ failure	Configuration	Using free Windows software, TTA Set Software
Power consumption	< 3.5 W	Step response time	50 ms...1 sec (RTD, mV inputs), 110 ms...1 sec (V, mA inputs)
Temperature coefficient	< 0.1 % / K (DC, RTD); < 0.1 % FSR / K + CJ error 0.07 °C/K (thermocouples)	Type of connection	Tension-clamp connection
Voltage supply	24...240 V AC/DC; 24...36 V AC / 24...50 V DC (ATEX Zone 2)		

Insulation coordination

Clearance & creepage distances	≥ 5.5 mm (1 mm input/output)	EMC standards	EN 55011, EN 61000-6
Impulse withstand voltage	6 kV	Insulation voltage	2.5 kV
Pollution severity	2	Rated voltage	300 V
Surge voltage category	III		

Data for Ex applications (ATEX)

Marking	II 3 G Ex nA nC IIC T4 Gc
---------	---------------------------

Connection data

Type of connection	Tension-clamp connection	Stripping length, rated connection	7 mm
Clamping range, rated connection	2.5 mm ²	Clamping range, min.	0.5 mm ²
Clamping range, max.	2.5 mm ²		

Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ECLASS 9.0	27-21-01-20
ECLASS 9.1	27-21-01-90	ECLASS 10.0	27-21-01-20
ECLASS 11.0	27-21-01-20		

WAZ6 TTA EX

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Tender specification sheets

Long specification

**Universal measurement
isolating converters
and trip amplifiers, for
Ex zone 2 applications;
can be configured with
a PC**

**Universal measurement
isolating converters
and trip amplifiers in 45
mm width with external
supply**

**for voltage and
sensors, for
transmitting and
isolating analogue DC
current**

**-20 to 50 mA, voltages
-200 to 500 mV/ -20 to
50 V, 2-/3-/4-wire RTD,
resistors,
thermocouples
according to IEC 584
and frequencies up to
100 kHz(2- / 3-wire
sensors).**

**Two switching outputs
(CO contacts) are
available on the output
side for alarms.**

**Analogue DC voltage
(-10...+10 V) and current
outputs (0...20 mA) are
available on the output
side.**

**The component
can be configured
with a PC using the
proprietary TTA-Set
software.**

**Add-on housing for
TS35 rail mounting
Dimensions: L/W/H
100/ 45/ 112.4 mm**

**Tension-clamp
connection / Nominal
cross-section 1.5 mm²
Protection degree: IP
20**

**Input -20...50
mA**

**-200...500 mV / -10...
+10 V**

**PT100, PT1000,
Ni100, Ni1000,
Cu10/25/50/100
2-/3-/4-wire**

**Resistance 10 Ohm...5
kOhm/ Potentiometer
100 Ohm...100 kOhm**

**Thermocouple types B,
E, J, K, N, R, S, T**

Short specification

WAZ6 TTA EX

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Important note

Product information

WAS/WAZ6 TTA is a universal signal converter and trip amplifier that can be configured on the PC. Combines the functions of isolation, transmission, linearisation and trip amplification in a single module.

These exceptional characteristics and outstanding configurability combine to make the TTA truly unique.

The TTA functions with stability and precision under a wide range of voltages and ambient temperatures. It is compatible with all standard sensor types.

- Universal input signals: temperature signals such as resistance thermometer, thermocouple, potentiometer, frequency transmitter, DC voltage signals and current signals
- Loop-powered or passive input
- Wide-range power supply: 18 – 264 V AC/DC
- User-defined linearization
- Inputs and outputs can be configured on PC
- Combined analogue and relay output
- Ambient temperature range: -40 °C ... 70 °C

The CBX200 USB interface is used to connect to the PC.

The WAS/WAZ6 TTA is also offered as an option with ATEX Zone 2 and UL C1D2 approvals.

Approvals

Approvals



ROHS	Conform
UL File Number Search	E141197

Downloads


Approval/Certificate/Document of Conformity	ATEX certification DNV GL Certificate Declaration of Conformity
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD
Software	Install_TTASet_V107.zip
User Documentation	Manual english, deutsch, france Instruction sheet
Catalogues	Catalogues in PDF-format
Brochures	

WAZ6 TTA EX


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

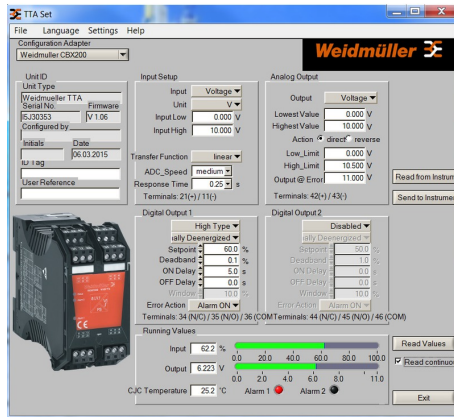




Screenshot of TTA Set software

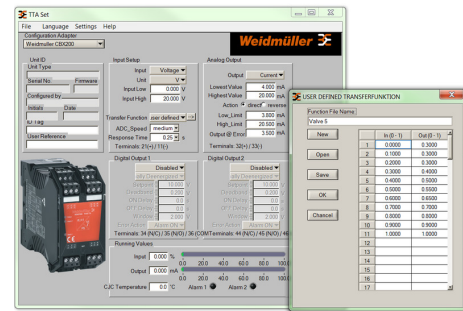

example of user defined transfer function for assigning customized output values



connection to your PC

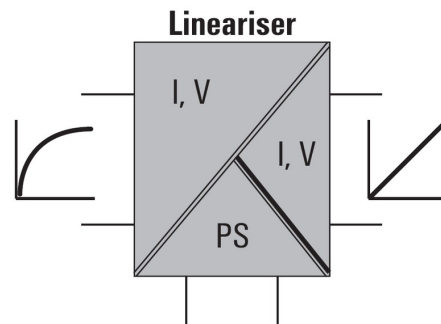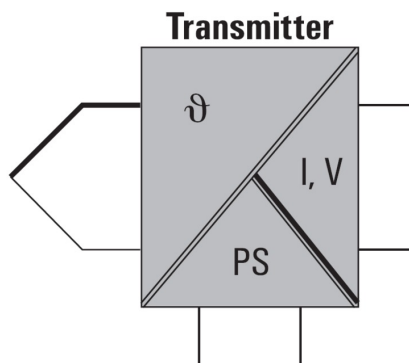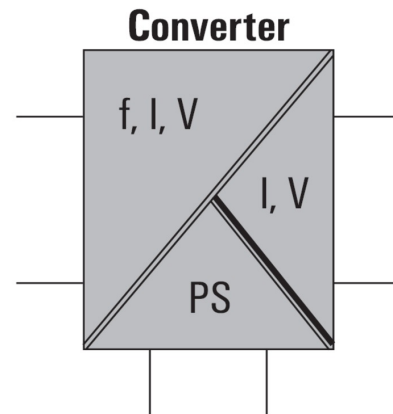

WAZ6 TTA EX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Similar to illustration

