


LU 10.16/90

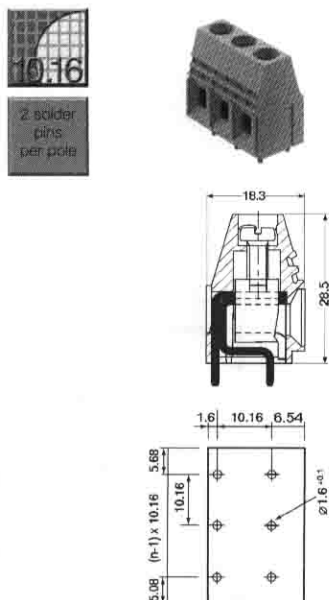

Technical data	VDE	UL	CSA
Rated voltage (V)	630*	300	300
Rated current (A)	57	65	50
Wire size (mm ² /AWG)	16.0	26...6	22...8

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 65


Solder pin length 4.5 mm

Color

Poles	Type	Part No.	Qty.
2	LU 10.16/2/90 2 PIN	1648310000	20
3	LU 10.16/3/90 2 PIN	1648300000	20
4	LU 10.16/4/90 2 PIN	995639	
5	LU 10.16/5/90 2 PIN	995640	
6	LU 10.16/6/90 2 PIN	995641	
7	LU 10.16/7/90 2 PIN	995642	
8	LU 10.16/8/90 2 PIN	995643	
9	LU 10.16/9/90 2 PIN	995644	
10	LU 10.16/10/90 2 PIN	995645	

Accessories	Page
Marking	40, 42
Mounting	-
Miscellaneous	45

LU 10.16/90

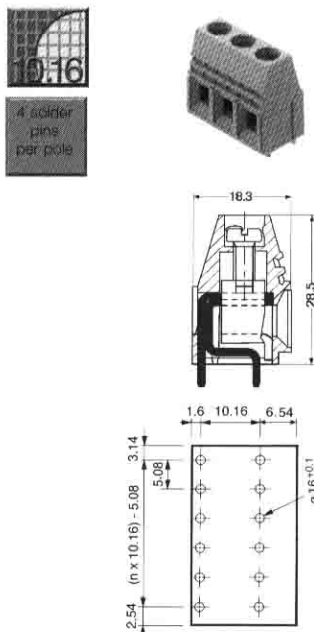

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	57	65	50
Wire size (mm ² /AWG)	16.0	26...6	22...8

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 65


Solder pin length 4.5 mm

Color

Poles	Type	Part No.	Qty.
2	LU 10.16/2/90 4 PIN	1636170000	20
3	LU 10.16/3/90 4 PIN	1636180000	20
4	LU 10.16/4/90 4 PIN	995419	
5	LU 10.16/5/90 4 PIN	995420	
6	LU 10.16/6/90 4 PIN	995421	
7	LU 10.16/7/90 4 PIN	995422	
8	LU 10.16/8/90 4 PIN	995423	
9	LU 10.16/9/90 4 PIN	995424	
10	LU 10.16/10/90 4 PIN	995425	

Accessories	Page
Marking	40, 42
Mounting	-
Miscellaneous	45

LX 15.00/90

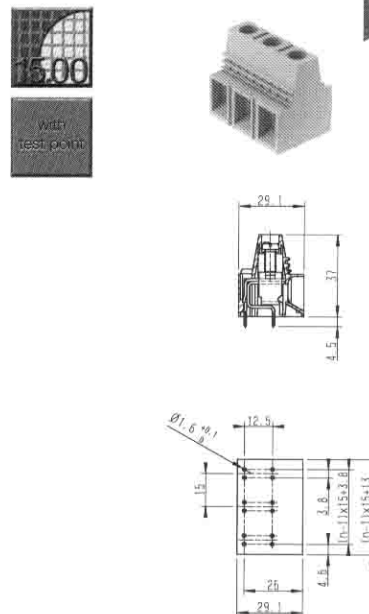

Technical data	VDE	UL	CSA
Rated voltage (V)	800*	600	600
Rated current (A)	101	85	85
Wire size (mm ² /AWG)	25.0	16...4	4

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 64

Solder pin length 4.5 mm

4 solder pins per pole

Color

Poles	Type	Part No.	Qty.
1	LX 15.00/1/90	1783660000	20
2	LX 15.00/2/90	1783670000	20
3	LX 15.00/3/90	1783680000	20
4	LX 15.00/4/90	1783690000	20
5	LX 15.00/5/90	on request	20
6	LX 15.00/6/90	on request	10
7	LX 15.00/7/90	on request	10
8	LX 15.00/8/90	on request	10

Accessories	Page
Marking	40
Mounting	-
Miscellaneous	45