

DATA SHEET

INDUCTOR

Power Inductor

APSD Series

RoHS compliant & Halogen Free



Power Inductor APSD Series **Automotive
AEC-Q200**

RoHS Compliant
Halogen Free
REACH Compliant



Power
Circuit

Unshield

Wire
Wound

Ferrite

Part Numbering


A	PSD	00	030321	1R0	M	00
Grade	Series Name	Control Code	Dimensions Code (mm)	Inductance (uH)	Tolerance	Internal Code
			030321 3.3x3.0x2.1	R47 0.47	K ±10%	
			050432 4.5x4.0x3.2	1R0 1.0	M ±20%	
			060530 5.8x5.2x3.0	101 100	T±30%	
			060545 5.8x5.2x4.5			
			080735 7.8x7.0x3.5			
			080750 7.8x7.0x5.0			

Power Inductor APSD Series

**Automotive
AEC-Q200**


APSD00030321 Type

■ Dimensions

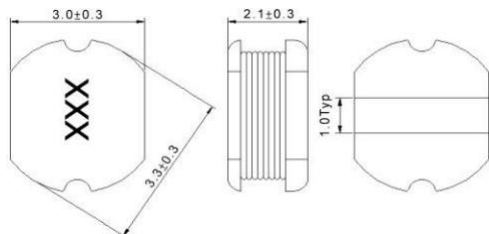

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Tolerance (±%)	Marking
APSD00030321R82□00	0.82	7.96 MHz,1 V	0.06	2.2	30	AX
APSD00030321R0□00	1	7.96 MHz,1 V	0.07	2.08	20	BA
APSD00030321R4□00	1.4	7.96 MHz,1 V	0.09	1.86	20	BE
APSD00030321R5□00	1.5	7.96 MHz,1 V	0.11	1.8	20	BF
APSD00030321R8□00	1.8	7.96 MHz,1 V	0.11	1.8	20	BI
APSD00030321R2□00	2.2	7.96 MHz,1 V	0.13	1.39	20	CC
APSD00030321R7□00	2.7	7.96 MHz,1 V	0.14	1.32	20	CH
APSD00030321R3□00	3.3	7.96 MHz,1 V	0.17	1.25	20	DD
APSD00030321R9□00	3.9	7.96 MHz,1 V	0.19	1.2	20	DJ
APSD00030321R4R7□00	4.7	7.96 MHz,1 V	0.21	1.13	20	EH
APSD00030321R5R6□00	5.6	7.96 MHz,1 V	0.22	0.91	20	FG
APSD00030321R6R8□00	6.8	7.96 MHz,1 V	0.25	0.85	20	GI
APSD00030321R7R0□00	7	7.96 MHz,1 V	0.28	0.82	20	HA
APSD00030321R8R2□00	8.2	7.96 MHz,1 V	0.28	0.82	20	IC
APSD00030321100□00	10	2.52 MHz,1 V	0.32	0.74	10,20	KA
APSD00030321120□00	12	2.52 MHz,1 V	0.35	0.64	20	QA
APSD00030321150□00	15	2.52 MHz,1 V	0.4	0.6	20	MA
APSD00030321180□00	18	2.52 MHz,1 V	0.48	0.54	20	RA
APSD00030321220□00	22	2.52 MHz,1 V	0.58	0.5	10,20	LA
APSD00030321270□00	27	2.52 MHz,1 V	0.65	0.43	20	SA
APSD00030321330□00	33	2.52 MHz,1 V	0.8	0.4	20	NA
APSD00030321390□00	39	2.52 MHz,1 V	0.9	0.37	20	PA
APSD00030321470□00	47	2.52 MHz,1 V	1.19	0.36	20	OA
APSD00030321500□00	50	2.52 MHz,1 V	1.22	0.33	20	TA
APSD00030321560□00	56	2.52 MHz,1 V	1.27	0.31	20	UA
APSD00030321680□00	68	2.52 MHz,1 V	1.73	0.3	10,20	VA
APSD00030321750□00	75	2.52 MHz,1 V	1.9	0.29	20	WA
APSD00030321820□00	82	2.52 MHz,1 V	1.99	0.28	10,20	XA
APSD00030321101□00	100	1 kHz,1 V	2.52	0.25	10,20	KB
APSD00030321121□00	120	1 kHz,1 V	2.9	0.2	10,20	QB
APSD00030321151□00	150	1 kHz,1 V	3.36	0.19	20	MB
APSD00030321181□00	180	1 kHz,1 V	5.1	0.17	20	RB
APSD00030321221□00	220	1 kHz,1 V	5.8	0.16	10,20	LB
APSD00030321271□00	270	1 kHz,1 V	7.8	0.14	10,20	SB

Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20% / T=±30%

1. Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
2. Isat for Inductance drop 10% from its value without current
3. Measure Equipment:

L: Agilent E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)

RDC: Chroma 16502

Isat: HP4284+42841A or WK3260B+WK3265B


Power Inductor APSD Series

Automotive
AEC-Q200


APSD00030321 Type

■ Characteristics Graph

Inductance vs. Frequency Charateristics

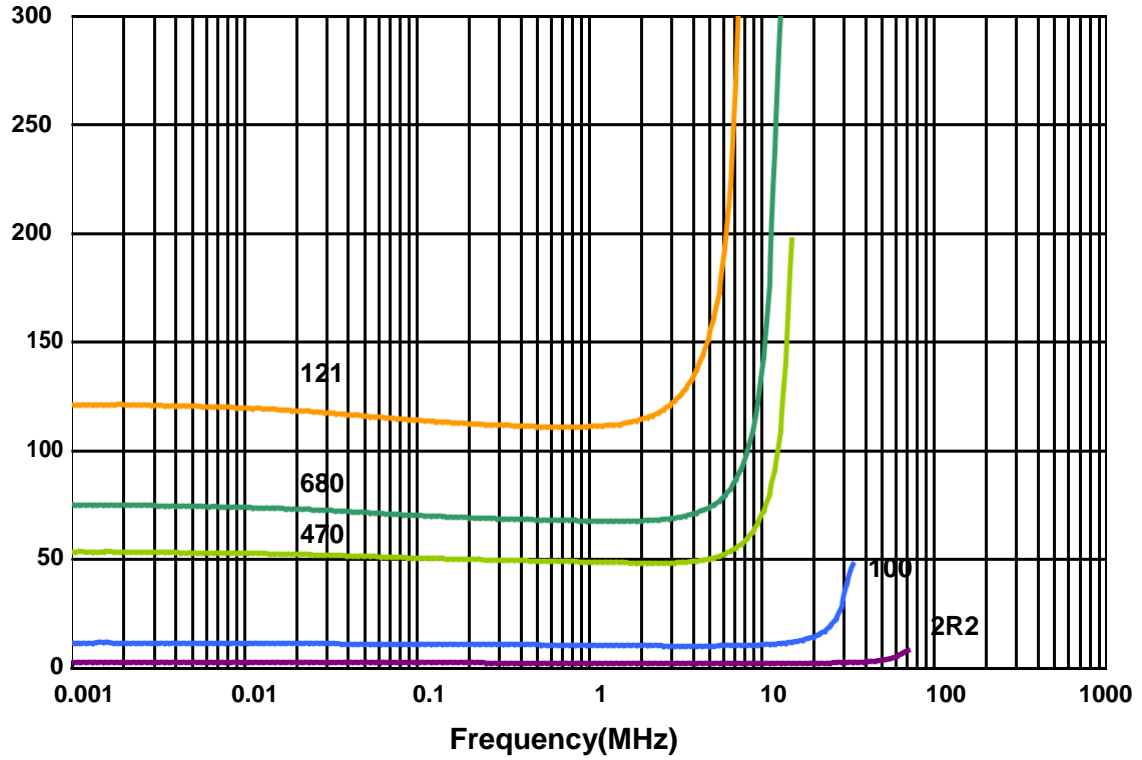

Inductance vs. DC Current

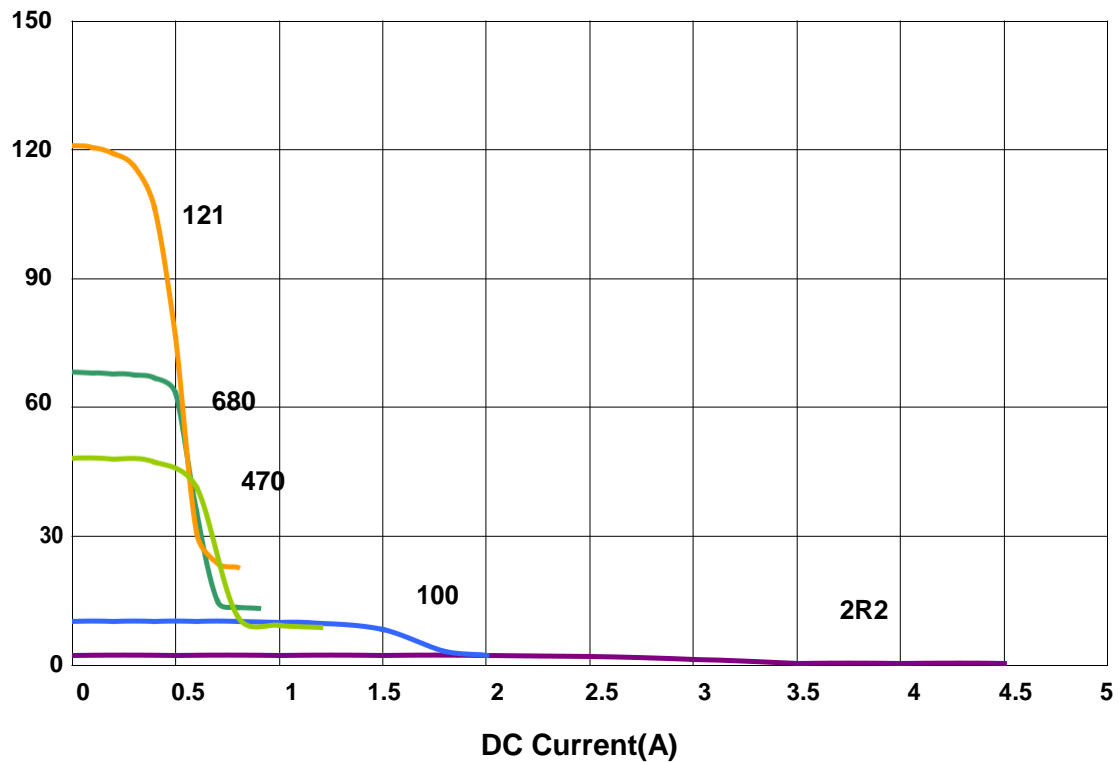


Power Inductor APSD Series

**Automotive
AEC-Q200**


APSD00050432 Type

■ Dimensions

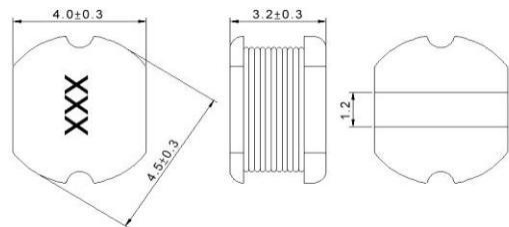

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Tolerance (±%)	Marking
APSD00050432R15□00	0.15	7.96 MHz,1 V	0.0085	7.5	30	R15
APSD00050432R1R0□00	1	7.96 MHz,1 V	0.033	3.8	10,20	1R0
APSD00050432R1R2□00	1.2	7.96 MHz,1 V	0.035	3.5	20	1R2
APSD00050432R1R4□00	1.4	7.96 MHz,1 V	0.038	3.3	20	1R4
APSD00050432R1R8□00	1.8	7.96 MHz,1 V	0.042	2.91	10,20	1R8
APSD00050432R2□00	2.2	7.96 MHz,1 V	0.047	2.6	10,20	2R2
APSD00050432R7□00	2.7	7.96 MHz,1 V	0.052	2.43	20	2R7
APSD00050432R3□00	3.3	7.96 MHz,1 V	0.058	2.15	10,20	3R3
APSD00050432R9□00	3.9	7.96 MHz,1 V	0.076	1.98	20	3R9
APSD00050432R4R7□00	4.7	7.96 MHz,1 V	0.094	1.7	10,20	4R7
APSD00050432R6□00	5.6	7.96 MHz,1 V	0.101	1.6	10,20	5R6
APSD00050432R2□00	6.2	7.96 MHz,1 V	0.11	1.5	20	6R2
APSD00050432R8□00	6.8	7.96 MHz,1 V	0.117	1.41	10,20	6R8
APSD00050432R8□00	8.2	7.96 MHz,1 V	0.132	1.26	10,20	8R2
APSD00050432100□00	10	2.52 MHz,1 V	0.182	1.15	10,20	100
APSD00050432120□00	12	2.52 MHz,1 V	0.21	1.05	20	120
APSD00050432150□00	15	2.52 MHz,1 V	0.235	0.92	10,20	150
APSD00050432180□00	18	2.52 MHz,1 V	0.338	0.84	20	180
APSD00050432220□00	22	2.52 MHz,1 V	0.378	0.76	10,20	220
APSD00050432270□00	27	2.52 MHz,1 V	0.522	0.71	20	270
APSD00050432330□00	33	2.52 MHz,1 V	0.54	0.64	10,20	330
APSD00050432390□00	39	2.52 MHz,1 V	0.587	0.59	10,20	390
APSD00050432470□00	47	2.52 MHz,1 V	0.844	0.54	10,20	470
APSD00050432560□00	56	2.52 MHz,1 V	0.937	0.5	10,20	560
APSD00050432680□00	68	2.52 MHz,1 V	1.117	0.46	10,20	680
APSD00050432101□00	100	1 kHz,1 V	2	0.4	10,20	101
APSD00050432121□00	120	1 kHz,1 V	1.8	0.38	10,20	121
APSD00050432151□00	150	1 kHz,1 V	2.8	0.3	10,20	151
APSD00050432181□00	180	1 kHz,1 V	3.2	0.25	10,20	181
APSD00050432221□00	220	1 kHz,1 V	4	0.15	10,20	221
APSD00050432331□00	330	1 kHz,1 V	5.85	0.21	10,20	331

Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20% / T=±30%

1. Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)

2. Isat for Inductance drop 10% from its value without current

3. Measure Equipment:

L: Agilent E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)

RDC: Chroma 16502

Isat: HP4284+42841A or WK3260B+WK3265B


Power Inductor APSD Series

Automotive
AEC-Q200


APSD00050432 Type

■ Characteristics Graph

Inductance vs. Frequency Charateristics

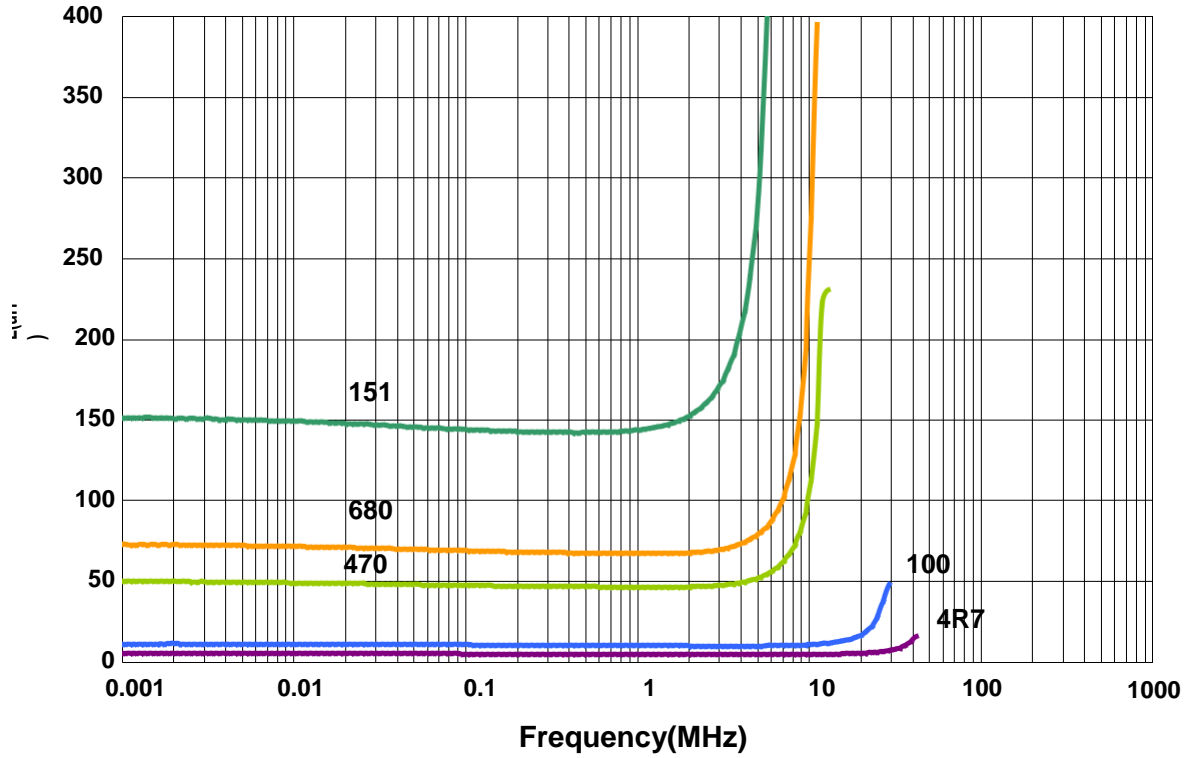

Inductance vs. DC Current

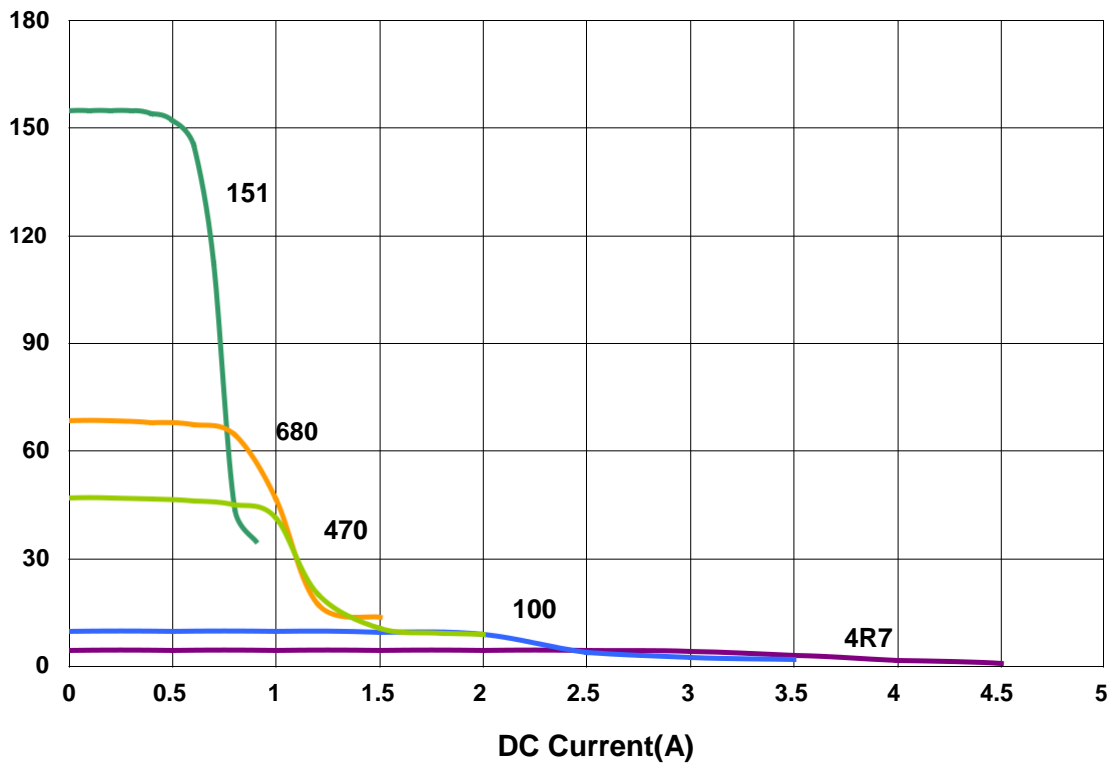


Power Inductor APSD Series

**Automotive
AEC-Q200**


APSD00060530 Type

■ Dimensions

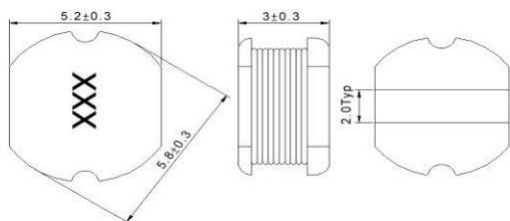

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Tolerance (±%)	Marking
APSD000605301R0□00	1	7.96 MHz, 1 V	0.03	4.5	20	1R0
APSD000605301R2□00	1.2	7.96 MHz, 1 V	0.03	4.2	20	1R2
APSD000605301R5□00	1.5	7.96 MHz, 1 V	0.03	4.1	20	1R5
APSD000605301R8□00	1.8	7.96 MHz, 1 V	0.03	3.7	10,20	1R8
APSD000605302R0□00	2	7.96 MHz, 1 V	0.03	3.6	20	2R0
APSD000605302R2□00	2.2	7.96 MHz, 1 V	0.03	3.5	20	2R2
APSD000605302R7□00	2.7	7.96 MHz, 1 V	0.04	3.2	20	2R7
APSD000605303R3□00	3.3	7.96 MHz, 1 V	0.05	2.8	10,20	3R3
APSD000605303R9□00	3.9	7.96 MHz, 1 V	0.06	2.6	20	3R9
APSD000605304R7□00	4.7	7.96 MHz, 1 V	0.07	2.5	10,20	4R7
APSD000605305R6□00	5.6	7.96 MHz, 1 V	0.08	2.4	20	5R6
APSD000605306R8□00	6.8	7.96 MHz, 1 V	0.09	2.2	20	6R8
APSD000605308R2□00	8.2	7.96 MHz, 1 V	0.1	2	20	8R2
APSD00060530100□00	10	2.52 MHz, 1 V	0.12	1.8	10,20	100
APSD00060530120□00	12	2.52 MHz, 1 V	0.13	1.75	20	120
APSD00060530150□00	15	2.52 MHz, 1 V	0.15	1.7	10,20	150
APSD00060530180□00	18	2.52 MHz, 1 V	0.22	1.6	10,20	180
APSD00060530220□00	22	2.52 MHz, 1 V	0.22	1.5	10,20	220
APSD00060530270□00	27	2.52 MHz, 1 V	0.26	1.4	20	270
APSD00060530330□00	33	2.52 MHz, 1 V	0.33	1.1	10,20	330
APSD00060530390□00	39	2.52 MHz, 1 V	0.42	1	10,20	390
APSD00060530470□00	47	2.52 MHz, 1 V	0.5	0.9	10,20	470
APSD00060530560□00	56	2.52 MHz, 1 V	0.55	0.85	10,20	560
APSD00060530680□00	68	2.52 MHz, 1 V	0.65	0.8	10,20	680
APSD00060530820□00	82	2.52 MHz, 1 V	0.8	0.65	10,20	820
APSD00060530101□00	100	1 kHz, 1 V	0.9	0.6	10,20	101
APSD00060530121□00	120	1 kHz, 1 V	1	0.58	10,20	121
APSD00060530151□00	150	1 kHz, 1 V	1.3	0.43	10,20	151
APSD00060530181□00	180	1 kHz, 1 V	1.5	0.41	10,20	181
APSD00060530221□00	220	1 kHz, 1 V	2	0.38	10,20	221
APSD00060530271□00	270	1 kHz, 1 V	2.5	0.35	10,20	271
APSD00060530331□00	330	1 kHz, 1 V	3.2	0.28	10,20	331
APSD00060530391□00	390	1 kHz, 1 V	3.5	0.26	10,20	391
APSD00060530471□00	470	1 kHz, 1 V	4.2	0.2	10,20	471
APSD00060530561□00	560	1 kHz, 1 V	4.5	0.19	10,20	561

Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20%


- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 10% from its value without current
- Measure Equipment:
L: Agilent E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)
RDC: Chroma 16502

Power Inductor APSD Series

**Automotive
AEC-Q200**


APSD00060530 Type

■ Dimensions

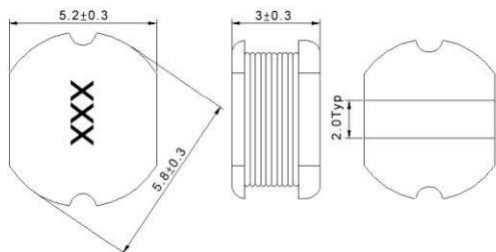

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Tolerance (±%)	Marking
APSD00060530681□00	680	1 kHz,1 V	6.5	0.18	10,20	681
APSD00060530821□00	820	1 kHz,1 V	7.5	0.15	10,20	821
APSD00060530102□00	1000	1 kHz,1 V	8	0.13	10,20	102

Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20%

1. Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
2. Isat for Inductance drop 10% from its value without current
3. Measure Equipment:

L: Agilent E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)

RDC: Chroma 16502


Isat: HP4284+42841A or WK3260B+WK3265B

Power Inductor SCD Series **Automotive
AEC-Q200**


APSD00060530 Type

Characteristics Graph

Inductance vs. Frequency Charateristics

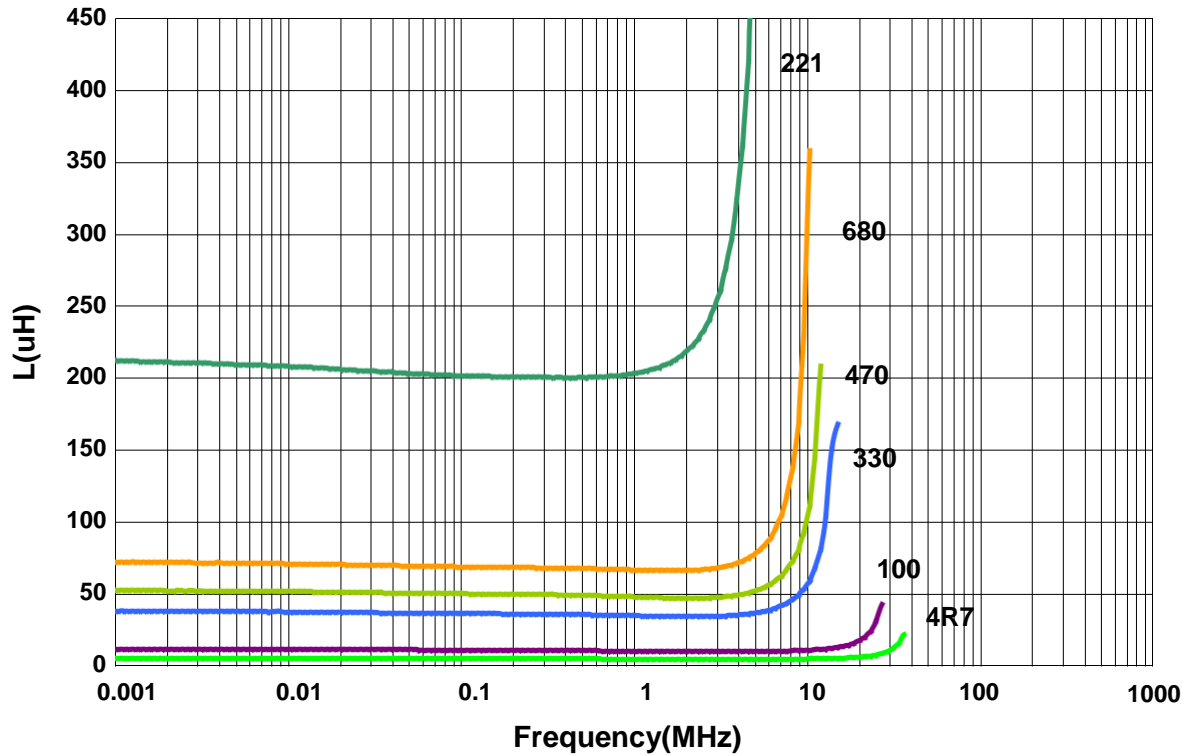

Inductance vs. DC Current

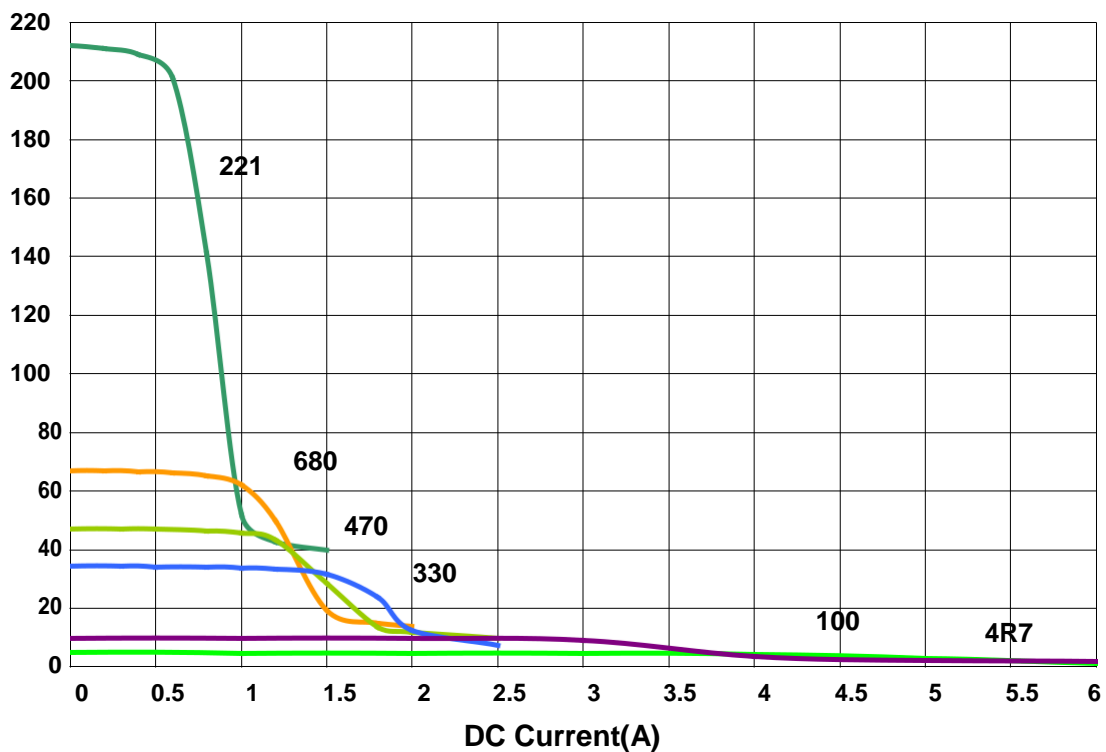


Power Inductor APSD Series

**Automotive
AEC-Q200**


APSD00060545 Type

■ Dimensions

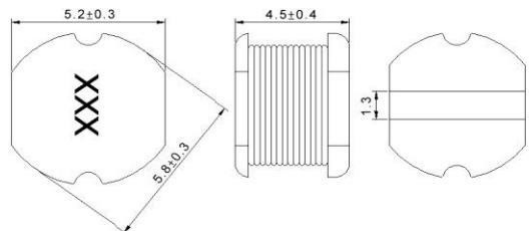

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Tolerance (±%)	Marking
APSD000605451R8□00	1.8	7.96 MHz,1 V	0.02	3.5	20	1R8
APSD000605452R2□00	2.2	7.96 MHz,1 V	0.023	3.2	20	2R2
APSD000605453R3□00	3.3	7.96 MHz,1 V	0.0314	2.59	10,20	3R3
APSD000605453R5□00	3.5	7.96 MHz,1 V	0.03	2.4	20	3R5
APSD000605454R7□00	4.7	7.96 MHz,1 V	0.0372	2.3	10,20	4R7
APSD000605456R8□00	6.8	7.96 MHz,1 V	0.057	1.8	20	6R8
APSD000605458R2□00	8.2	7.96 MHz,1 V	0.0594	1.7	20	8R2
APSD00060545100□00	10	2.52 MHz,1 V	0.1	1.44	10,20	100
APSD00060545120□00	12	2.52 MHz,1 V	0.12	1.4	20	120
APSD00060545150□00	15	2.52 MHz,1 V	0.14	1.3	10,20	150
APSD00060545180□00	18	2.52 MHz,1 V	0.15	1.23	20	180
APSD00060545220□00	22	2.52 MHz,1 V	0.18	1.11	20	220
APSD00060545270□00	27	2.52 MHz,1 V	0.2	0.97	20	270
APSD00060545330□00	33	2.52 MHz,1 V	0.23	0.88	10,20	330
APSD00060545390□00	39	2.52 MHz,1 V	0.32	0.8	10,20	390
APSD00060545470□00	47	2.52 MHz,1 V	0.37	0.72	10,20	470
APSD00060545560□00	56	2.52 MHz,1 V	0.42	0.68	10,20	560
APSD00060545680□00	68	2.52 MHz,1 V	0.46	0.61	10,20	680
APSD00060545820□00	82	2.52 MHz,1 V	0.6	0.58	10,20	820
APSD00060545101□00	100	1 kHz,1 V	0.7	0.52	10,20	101
APSD00060545121□00	120	1 kHz,1 V	0.93	0.48	10,20	121
APSD00060545151□00	150	1 kHz,1 V	1.1	0.4	10,20	151
APSD00060545181□00	180	1 kHz,1 V	1.38	0.38	10,20	181
APSD00060545221□00	220	1 kHz,1 V	1.57	0.35	10,20	221
APSD00060545271□00	270	1 kHz,1 V	1.85	0.29	10,20	271
APSD00060545331□00	330	1 kHz,1 V	2	0.28	10,20	331
APSD00060545391□00	390	1 kHz,1 V	2.6	0.26	10,20	391
APSD00060545471□00	470	1 kHz,1 V	3	0.12	10,20	471
APSD00060545561□00	560	1 kHz,1 V	4.19	0.1	10,20	561
APSD00060545681□00	680	1 kHz,1 V	4.44	0.08	10,20	681
APSD00060545821□00	820	1 kHz,1 V	5.12	0.05	10,20	821
APSD00060545102□00	1000	1 kHz,1 V	10	0.03	10,20	102

Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20%

1. Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
2. Isat for Inductance drop 10% from its value without current
3. Measure Equipment:


L: Agilent E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)
RDC: Chroma 16502
Isat: HP4284+42841A or WK3260B+WK3265B

**Power Inductor APSD Series Automotive
AEC-Q200**


APSD00060545 Type

■ Characteristics Graph

Inductance vs. Frequency Charateristics

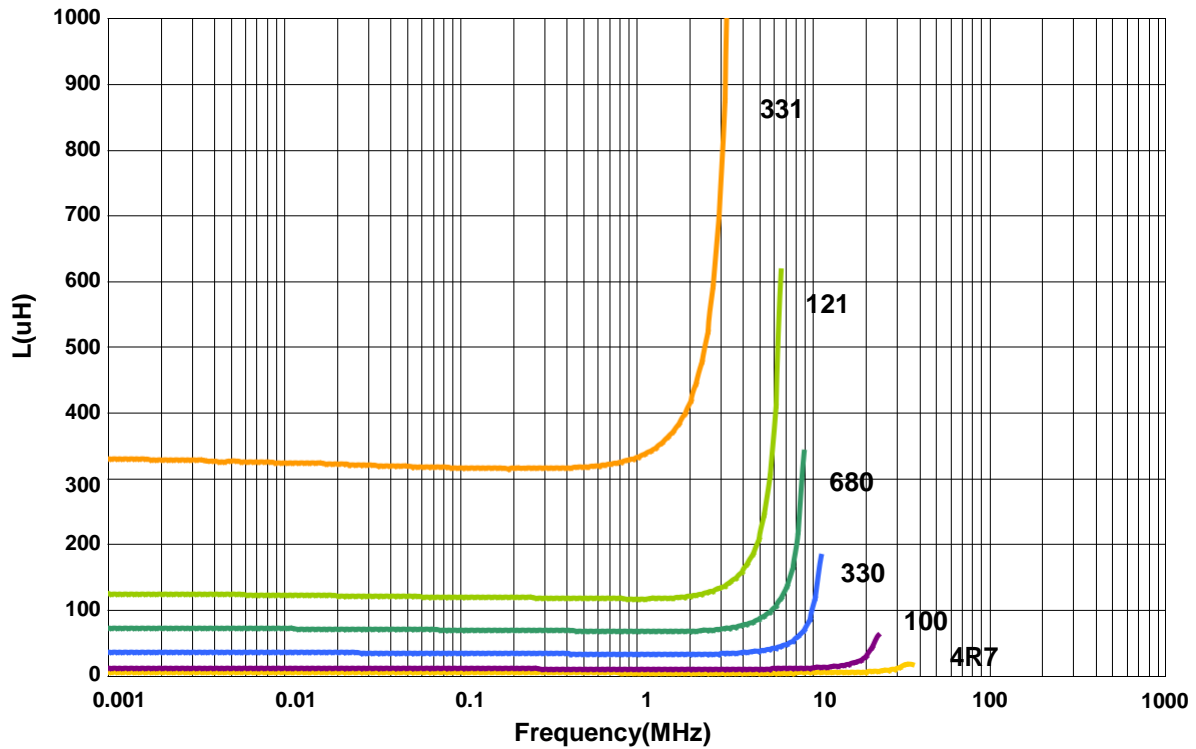

Inductance vs. DC Current

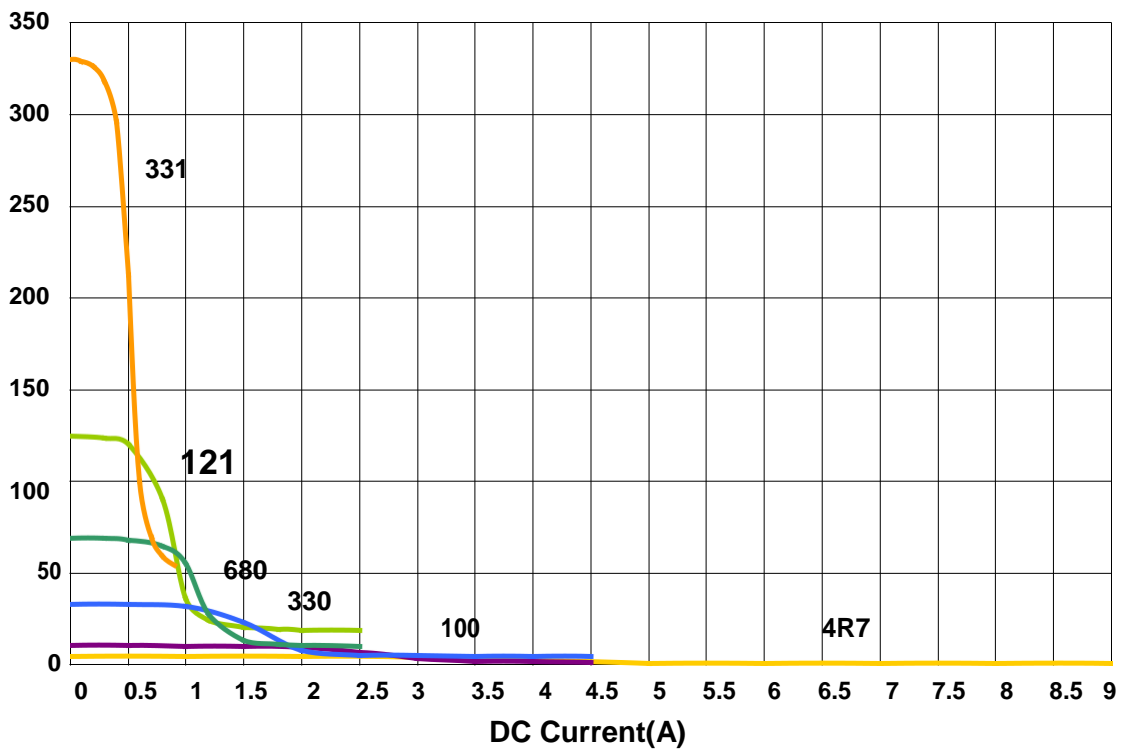


Power Inductor APSD Series

Automotive
AEC-Q200


APSD00080735 Type

■ Dimensions

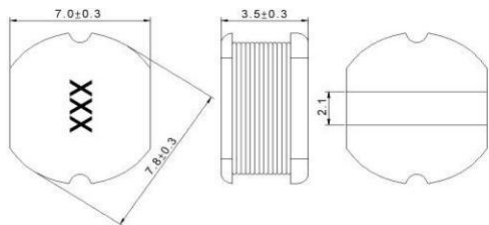

unit:mm

■ Recommended Land Pattern



unit:mm

■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Tolerance (±%)	Marking
APSD000807352R2□00	2.2	7.96 MHz,1 V	0.03	3.2	20	2R2
APSD000807354R7□00	4.7	2.52 MHz,1 V	0.04	1.6	20	4R7
APSD00080735100□00	10	2.52 MHz,1 V	0.08	1.44	20	100
APSD00080735120□00	12	2.52 MHz,1 V	0.09	1.39	10,20	120
APSD00080735150□00	15	2.52 MHz,1 V	0.1	1.24	10,20	150
APSD00080735180□00	18	2.52 MHz,1 V	0.11	1.12	20	180
APSD00080735220□00	22	2.52 MHz,1 V	0.13	1.07	20	220
APSD00080735270□00	27	2.52 MHz,1 V	0.15	0.94	20	270
APSD00080735330□00	33	2.52 MHz,1 V	0.17	0.85	10,20	330
APSD00080735390□00	39	2.52 MHz,1 V	0.22	0.74	10,20	390
APSD00080735470□00	47	2.52 MHz,1 V	0.25	0.68	10,20	470
APSD00080735560□00	56	2.52 MHz,1 V	0.28	0.64	10,20	560
APSD00080735680□00	68	2.52 MHz,1 V	0.33	0.59	10,20	680
APSD00080735820□00	82	2.52 MHz,1 V	0.41	0.54	10,20	820
APSD00080735101□00	100	1 kHz,1 V	0.48	0.51	10,20	101
APSD00080735121□00	120	1 kHz,1 V	0.54	0.49	10,20	121
APSD00080735151□00	150	1 kHz,1 V	0.75	0.4	10,20	151
APSD00080735181□00	180	1 kHz,1 V	1.02	0.36	10,20	181
APSD00080735221□00	220	1 kHz,1 V	1.2	0.31	10,20	221
APSD00080735271□00	270	1 kHz,1 V	1.31	0.29	10,20	271
APSD00080735331□00	330	1 kHz,1 V	1.5	0.28	10,20	331
APSD00080735561□00	560	1 kHz,1 V	2.5	0.14	10,20	561

Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20%

1. Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
2. Isat for Inductance drop 10% from its value without current
3. Measure Equipment:

L: Agilent E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)

RDC: Chroma 16502


Isat: HP4284+42841A or WK3260B+WK3265B

Power Inductor APSD Series **Automotive AEC-Q200**


APSD00080735 Type

Characteristics Graph

Inductance vs. Frequency Charateristics

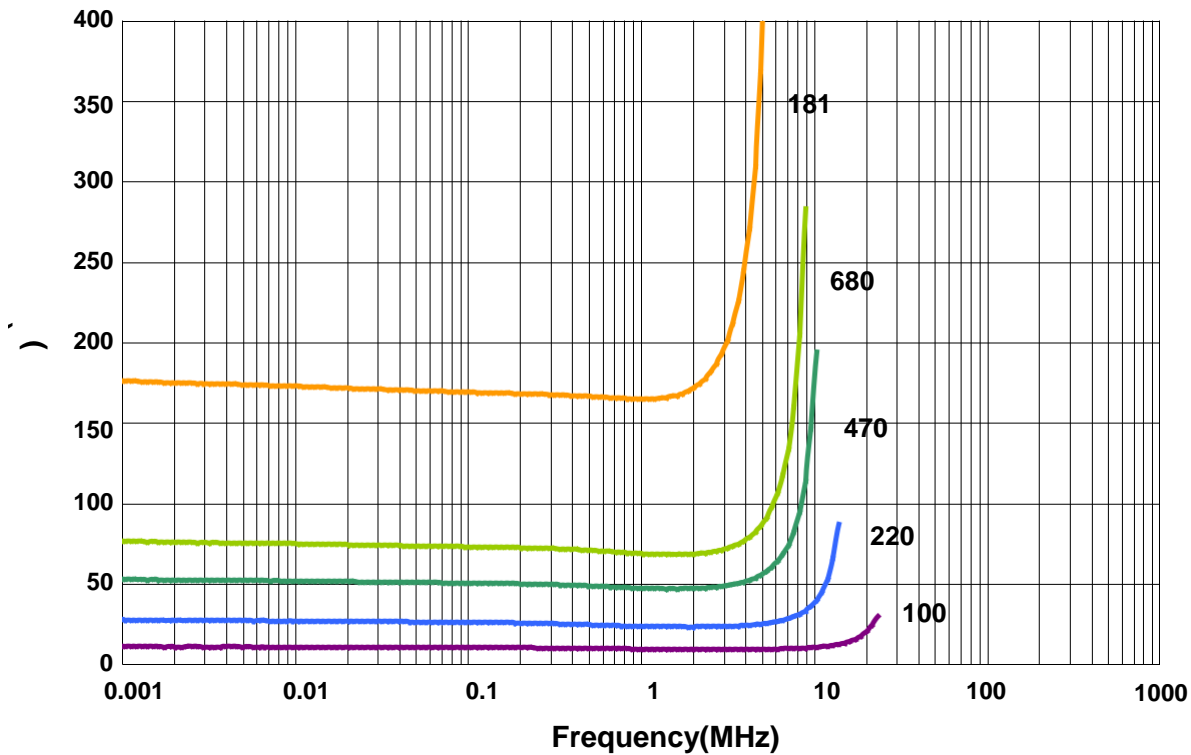

Inductance vs. DC Current

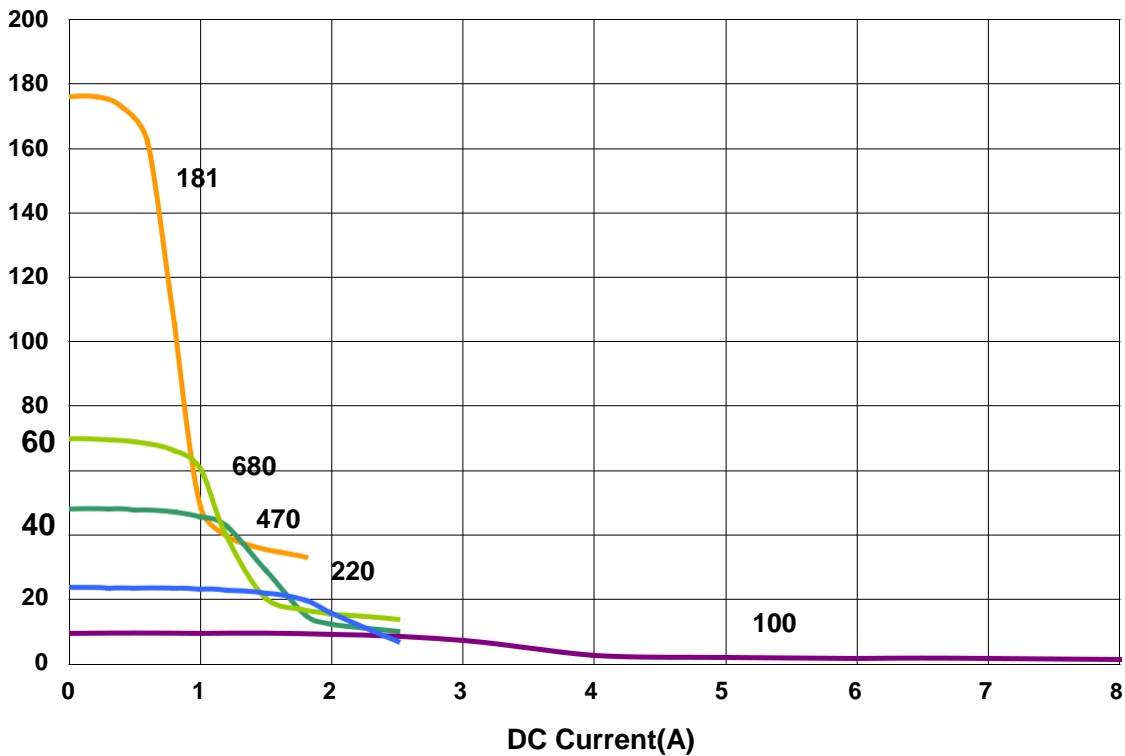


Power Inductor APSD Series

**Automotive
AEC-Q200**


APSD00080750 Type

Dimensions

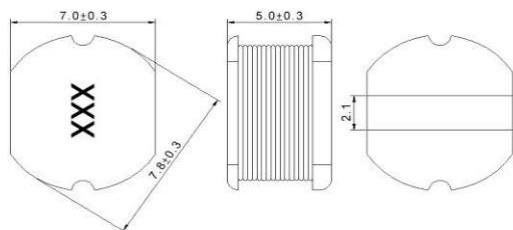

unit:mm

Recommended Land Pattern



unit:mm

Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Tolerance (±%)	Marking
APSD000807501R4□00	1.4	7.96 MHz,1 V	0.02	3.7	20	1R4
APSD000807501R5□00	1.5	7.96 MHz,1 V	0.02	3.7	20	1R5
APSD000807501R8□00	1.8	7.96 MHz,1 V	0.02	3.7	20	1R8
APSD000807502R2□00	2.2	7.96 MHz,1 V	0.02	3.7	20	2R2
APSD000807502R7□00	2.7	7.96 MHz,1 V	0.02	3.7	20	2R7
APSD000807503R0□00	3	7.96 MHz,1 V	0.025	3.7	20	3R0
APSD000807503R3□00	3.3	7.96 MHz,1 V	0.03	3.7	20	3R3
APSD000807503R6□00	3.6	7.96 MHz,1 V	0.03	3.7	20	3R6
APSD000807503R9□00	3.9	7.96 MHz,1 V	0.03	3.7	20	3R9
APSD000807504R7□00	4.7	7.96 MHz,1 V	0.04	3.5	10,20	4R7
APSD000807505R6□00	5.6	7.96 MHz,1 V	0.04	3.3	20	5R6
APSD000807506R8□00	6.8	7.96 MHz,1 V	0.04	3.1	20	6R8
APSD000807508R2□00	8.2	7.96 MHz,1 V	0.05	2.7	20	8R2
APSD00080750100□00	10	2.52 MHz,1 V	0.07	2.3	10,20	100
APSD00080750120□00	12	2.52 MHz,1 V	0.08	2	20	120
APSD00080750150□00	15	2.52 MHz,1 V	0.09	1.8	10,20	150
APSD00080750180□00	18	2.52 MHz,1 V	0.1	1.6	20	180
APSD00080750220□00	22	2.52 MHz,1 V	0.11	1.5	10,20	220
APSD00080750270□00	27	2.52 MHz,1 V	0.12	1.3	20	270
APSD00080750330□00	33	2.52 MHz,1 V	0.13	1.2	10,20	330
APSD00080750390□00	39	2.52 MHz,1 V	0.16	1.1	10,20	390
APSD00080750470□00	47	2.52 MHz,1 V	0.18	1.1	10,20	470
APSD00080750560□00	56	2.52 MHz,1 V	0.24	0.94	10,20	560
APSD00080750680□00	68	2.52 MHz,1 V	0.28	0.85	10,20	680
APSD00080750820□00	82	2.52 MHz,1 V	0.37	0.78	10,20	820
APSD00080750101□00	100	1 kHz,1 V	0.43	0.72	10,20	101
APSD00080750121□00	120	1 kHz,1 V	0.47	0.66	10,20	121
APSD00080750151□00	150	1 kHz,1 V	0.64	0.58	10,20	151
APSD00080750181□00	180	1 kHz,1 V	0.71	0.51	10,20	181
APSD00080750221□00	220	1 kHz,1 V	0.96	0.49	10,20	221


Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20%

1. Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
2. Isat for Inductance drop 10% from its value without current
3. Measure Equipment:
L: Agilent E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)
RDC: Chroma 16502
Isat: HP4284+42841A or WK3260B+WK3265B

Power Inductor APSD Series **Automotive
AEC-Q200**


APSD00080750 Type

Dimensions

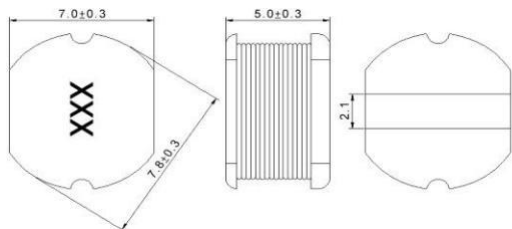

unit:mm

Recommended Land Pattern



unit:mm

Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Tolerance (±%)	Marking
APSD00080750271□00	270	1 kHz,1 V	1.11	0.42	10,20	271
APSD00080750331□00	330	1 kHz,1 V	1.26	0.4	10,20	331
APSD00080750391□00	390	1 kHz,1 V	1.77	0.36	10,20	391
APSD00080750471□00	470	1 kHz,1 V	1.96	0.34	10,20	471
APSD00080750561□00	560	1 kHz,1 V	2.41	0.32	10,20	561
APSD00080750681□00	680	1 kHz,1 V	2.5	0.29	10,20	681
APSD00080750102□00	1000	1 kHz,1 V	2.8	0.19	10,20	102

Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20%


- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 10% from its value without current
- Measure Equipment:
 - L: Agilent E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)
 - RDC: Chroma 16502
 - Isat: HP4284+42841A or WK3260B+WK3265B

Power Inductor APSD Series **Automotive AEC-Q200**


APSD00080750 Type

■ Characteristics Graph

Inductance vs. Frequency Charateristics

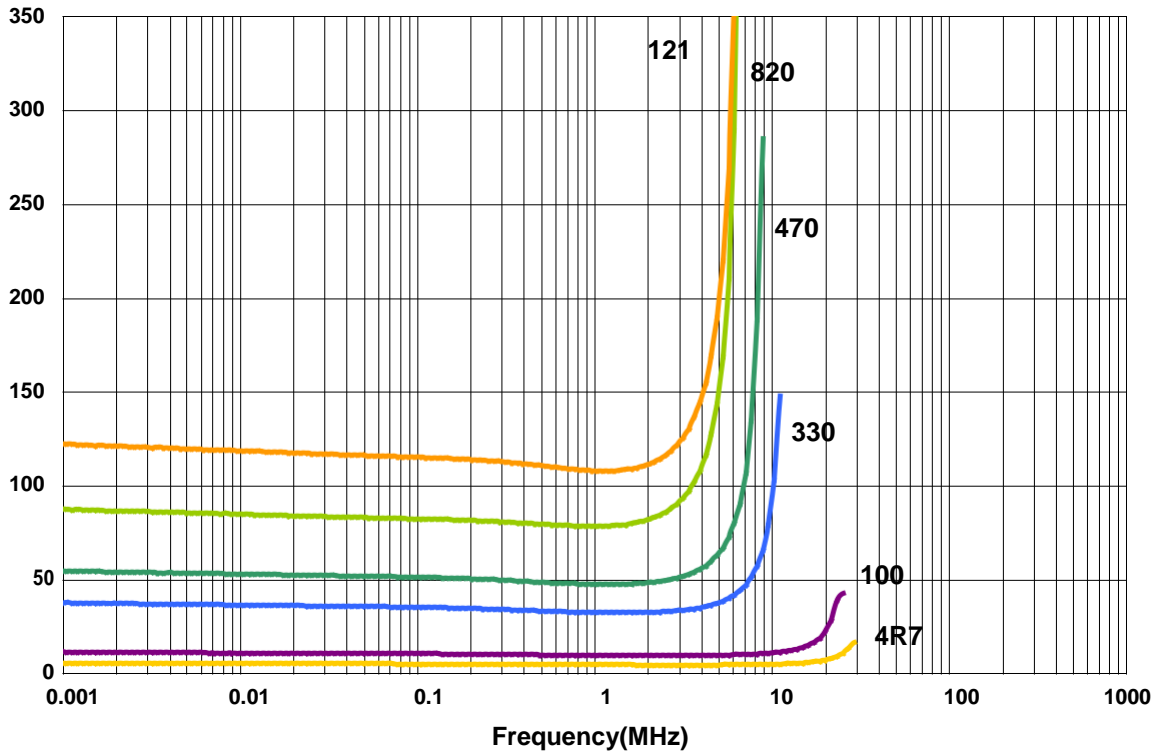


Inductance vs. DC Current

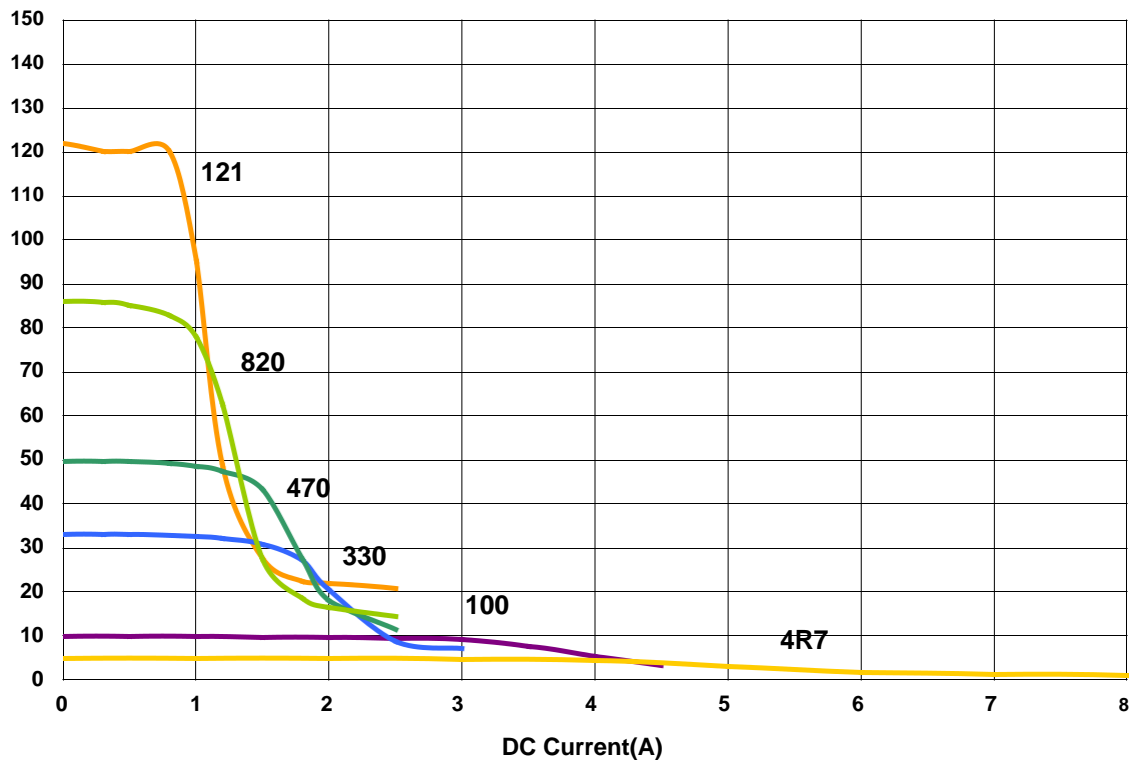


Power Inductor APSD Series **Automotive
AEC-Q200**

■ Packaging

Tape Dimensions

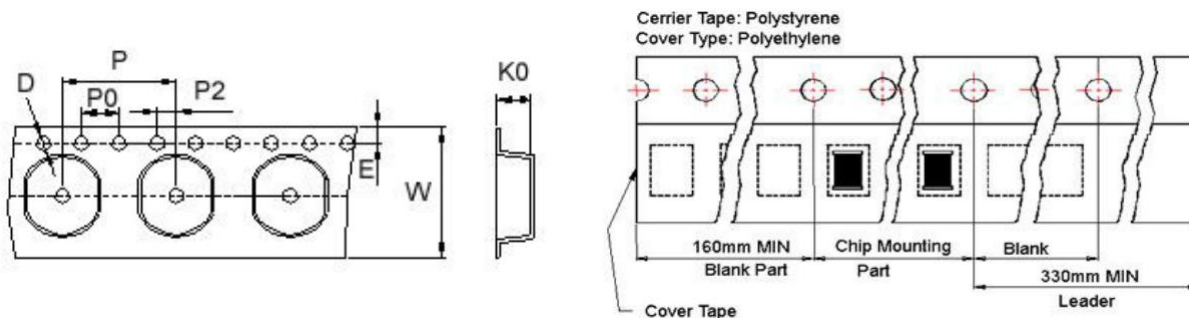

Reel Dimensions

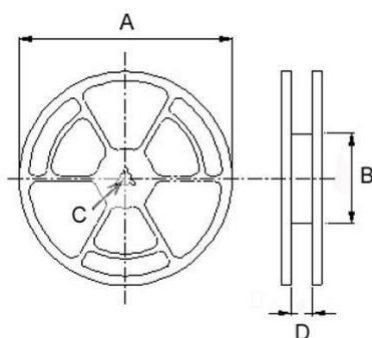

Dimensions in mm

TYPE	Tape Dimensions							Reel Dimensions				Quantity PCS / REEL
	K0	D	E	W	P	P0	P2	A	B	C	D	
APSD00030321	2.5	1.55	1.75	12	8	4	2	330	100	13	13.4	3000
APSD00050432	3.55	1.55	1.75	12	8	4	2	330	100	13	13.4	2000
APSD00060530	3.3	1.5	1.75	16	8	4	2	330	100	13	17.4	2000
APSD00060545	4.8	1.55	1.75	16	8	4	2	330	100	13	17.4	1500
APSD00080735	3.8	1.55	1.75	16	12	4	2	330	100	13	17.4	1000
APSD00080750	5.2	1.55	1.75	16	12	4	2	330	100	13	17.4	700