

NMA & K_HV Series
Non-Magnetic Trimmer Capacitors



Part Number	Capacitance (pF)		Q (Min) 100 MHz.	DC Working Voltage	DC Withstanding Voltage	Fig.	"A" Dim.	"B" Dim.	"C" Dim.	"D" Dim.	"E" Dim.	"F" Dim.	"G" Dim.
	From Below	To Above					± .016	± .016	± .016	± .016	± .016	± .016	± .016
NMKF4HV	0.5	4	2000	1000	2000	<u>4</u>	0.19	0.28	0.23	0.03	0.04	0.16	0.11
NMKJ4HV	0.5	4	2000	1000	2000	<u>2</u>	0.19	0.3	0.23	0.2	0.14	0.14	—
NMKM4HV	0.5	4	2000	1000	2000	<u>1</u>	0.19	0.28	0.23	0.04	0.16	0.045	—
NMKP4HV	0.5	4	2000	1000	2000	<u>5</u>	0.19	0.3	0.23	0.03	0.26	0.16	0.25
NMKT4HV	0.5	4	2000	1000	2000	<u>3</u>	0.2	0.27	0.23	0.04	—	—	0.11
NMKF10HV	0.5	9	2000	1000	2000	<u>4</u>	0.19	0.28	0.23	0.03	0.04	0.16	0.11
NMKJ10HV	0.5	9	2000	1000	2000	<u>2</u>	0.19	0.3	0.23	0.2	0.14	0.14	—
NMKM10HV	0.5	9	2000	1000	2000	<u>1</u>	0.19	0.28	0.23	0.04	0.16	0.045	—
NMKP10HV	0.5	9	2000	1000	2000	<u>5</u>	0.19	0.3	0.23	0.03	0.26	0.16	0.25
NMKT10HV	0.5	9	2000	1000	2000	<u>3</u>	0.2	0.27	0.23	0.040	—	—	0.11
NMAF10HV	1	10	2000	1000	2000	<u>4</u>	0.19	0.29	0.3	0.031	0.062	0.22	0.12
NMAJ10HV	1	10	2000	1000	2000	<u>2</u>	0.19	0.31	0.3	0.25	0.14	0.16	—
NMAM10HV	1	10	2000	1000	2000	<u>1</u>	0.19	0.29	0.3	0.067	0.2	0.045	—
NMAP10HV	1	10	2000	1000	2000	<u>5</u>	0.19	0.31	0.3	0.031	0.28	0.22	0.31
NMAT10HV	1	10	2000	1000	2000	<u>6</u>	0.2	0.28	0.3	0.090	—	—	0.13
NMAF15HV	1	16	2000	1000	2000	<u>4</u>	0.19	0.29	0.3	0.031	0.062	0.22	0.12
NMAJ15HV	1	16	2000	1000	2000	<u>2</u>	0.19	0.31	0.3	0.25	0.14	0.16	—
NMAM15HV	1	16	2000	1000	2000	<u>1</u>	0.19	0.29	0.3	0.067	0.2	0.045	—
NMAP15HV	1	16	2000	1000	2000	<u>5</u>	0.19	0.31	0.3	0.031	0.28	0.22	0.31
NMAT15HV	1	16	2000	1000	2000	<u>6</u>	0.2	0.28	0.3	0.090	—	--	0.13
NMAF25HV	1	23	2000	750	1500	<u>4</u>	0.19	0.29	0.3	0.031	0.062	0.22	0.12
NMAJ25HV	1	23	2000	750	1500	<u>2</u>	0.19	0.31	0.3	0.25	0.14	0.16	—
NMAM25HV	1	23	2000	750	1500	<u>1</u>	0.19	0.29	0.3	0.067	0.2	0.045	—
NMAP25HV	1	23	2000	750	1500	<u>5</u>	0.19	0.31	0.3	0.031	0.28	0.22	0.31
NMAT25HV	1	23	2000	750	1500	<u>6</u>	0.2	0.28	0.3	0.090	—	—	0.13
NMAF30*	1.5	30	2000	250	500	<u>4</u>	0.19	0.29	0.3	0.031	0.062	0.22	0.12
NMAJ30*	1.5	30	2000	250	500	<u>2</u>	0.19	0.31	0.3	0.25	0.14	0.16	—
NMAM30*	1.5	30	2000	250	500	<u>1</u>	0.19	0.29	0.3	0.067	0.2	0.045	—
NMAP30*	1.5	30	2000	250	500	<u>5</u>	0.19	0.31	0.3	0.031	0.28	0.22	0.31
NMAT30*	1.5	30	2000	250	500	<u>6</u>	0.2	0.28	0.3	0.090	—	—	0.13
NMAJ40HV	1.5	40	2000	1000	2000	<u>2</u>	0.44	0.56	0.3	0.25	0.14	0.16	—
NMAP40HV	1.5	40	2000	1000	2000	<u>5</u>	0.44	0.56	0.3	0.031	0.54	0.22	0.31
NMAT40HV	1.5	40	2000	1000	2000	<u>6</u>	0.45	0.53	0.3	0.090	—	—	0.13
NMAJ55HV	1.5	55	1500	600	1200	<u>2</u>	0.44	0.56	0.3	0.25	0.14	0.16	—

NMAP55HV	1.5	55	1500	600	1200	5	0.44	0.56	0.3	0.031	0.54	0.22	0.31
NMAT55HV	1.5	55	1500	600	1200	6	0.45	0.53	0.3	0.090	—	—	0.13

*HV version not available

NMA & K_HV Series Non-Magnetic Trimmer Capacitors

FIG. 1

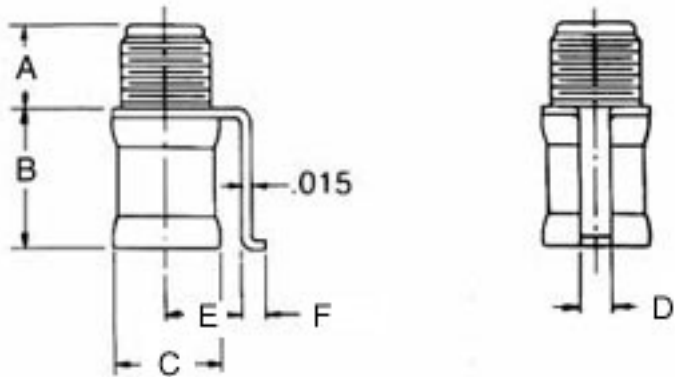


FIG. 2

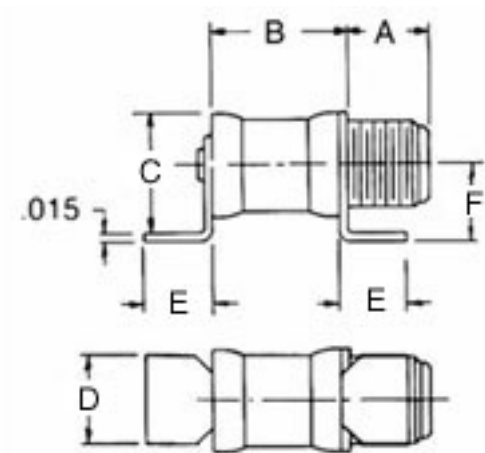


FIG. 3

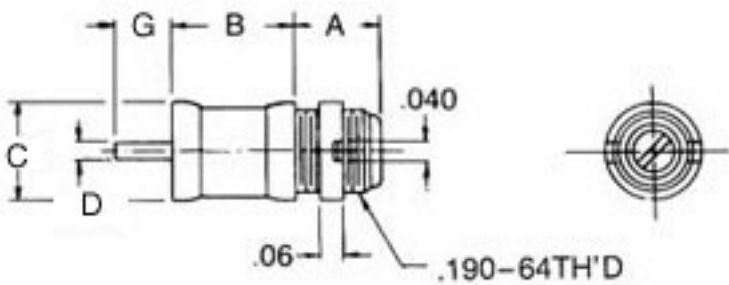


FIG. 4

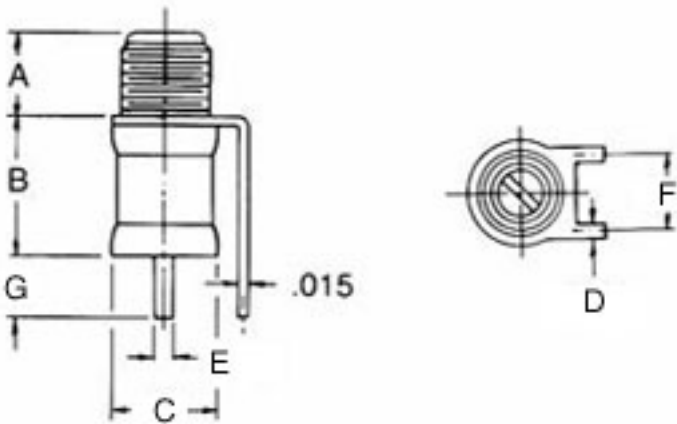


FIG. 5

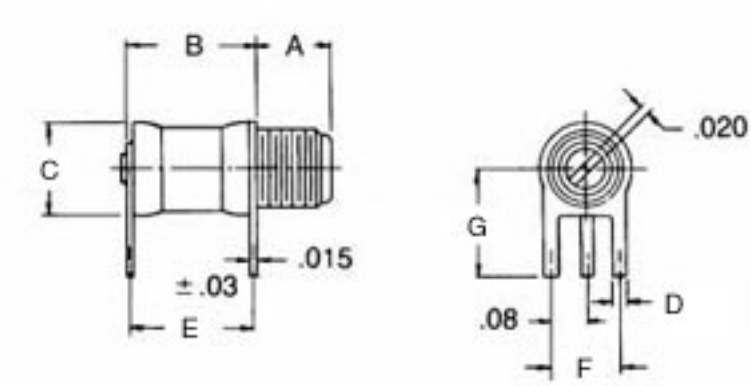


FIG. 6

