




Series 112, 113, & 114 Deci-Center™ Jumpers (cont.)

All tolerances $\pm .005$ [.13]
unless otherwise specified

Note: 10, 12, 18, 20, & 28
conductor jumpers do not
have numbers on covers

See Data Sheet No.
11008 for other
configurations and
additional information.

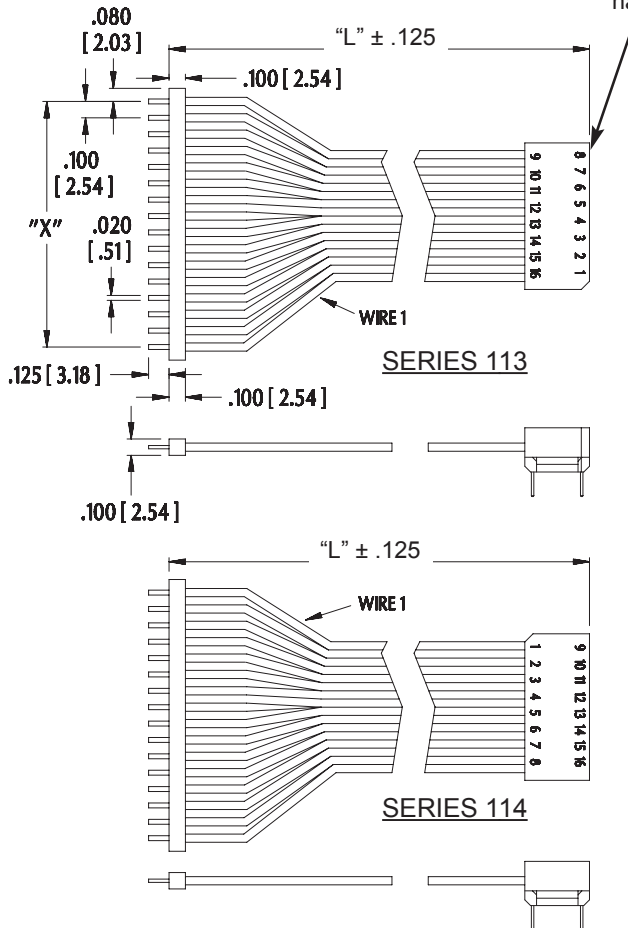


WIRING LIST

Wire Number	Series 112, 113, 114 Pin Number	Series 112X, 113X, 114X Pin Number
1	1	1
2	2	16
3	3	2
4	4	15
5	5	3
6	6	14
7	7	4
8	8	13
9	9	5
10	10	12
11	11	6
12	12	11
13	13	7
14	14	10
15	15	8
16	16	9

CABLE DETAIL

(Series 112X, 113X, 114X)

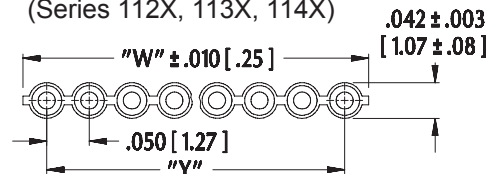

"W" = NO. OF CONDUCTORS X .050 [1.27] + .005 [.08]
 "Y" = (NO. OF CONDUCTORS - 1) X .050 [1.27]
 "Z" = (NO. OF CONDUCTORS - 1) X .039 [.99]

CABLE DETAIL

(Series 112, 113, 114)



ORDERING INFORMATION


XX - XXXX - XXX

No. of conductors
(see table)

Jumper series:
112, 113, 114
112X, 113X, 114X
(see wiring table)

Cable length in inches:
Ex: 3" = -.003 - / 3.5" = -.003.5 -
min. length = 3" [76.20mm]

HEADER DETAIL

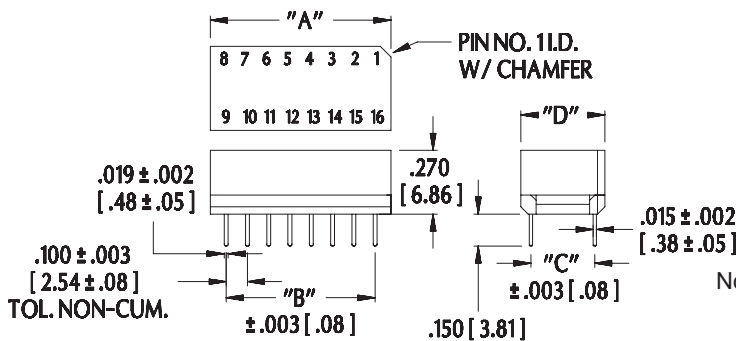

"A" = (NO. OF CONDUCTORS X .050 [1.27]) + .095 [2.41]
 "B" = (NO. OF CONDUCTORS - 1) X .050 [1.27]
 "X" = (NO. OF CONDUCTORS - 1) X .100 [2.54]

ARIES
ELECTRONICS, INC.
http://www.arieselec.com • info@arieselec.com

Bristol, PA USA
TEL: (215) 781-9956
FAX: (215) 781-9845



11009
REV. E