
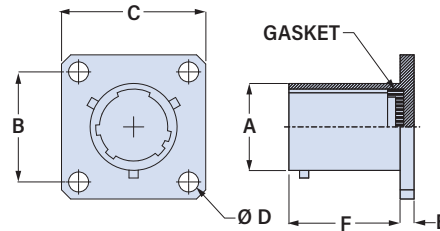


Series 65 Dummy Receptacles

for MIL-DTL-38999 Series I & II Bayonet Connectors

650FS001, 650FS002

650FS001 DUMMY RECEPTACLE FOR MIL-DTL-38999 SERIES I BAYONET CONNECTORS





Use dummy storage receptacle to secure and protect unused plugs. 650FS001 receptacle accommodates MIL-DTL-38999 Series I bayonet coupling connectors. Silicone gasket, stainless steel bayonet pins.

TABLE 1 FINISH CODES

| Aluminum | Stainless Steel |
|------------------------------|---------------------|
| C Black Anodize | Z1 Passivate |
| M Electroless Nickel | |
| NF Olive Drab Cadmium | |
| MT Nickel-PTFE | |
| ZR Black Zinc-Nickel | |
| TZ Tin-Zinc | |

| Shell Size | Part Number * = Finish Code from Table 1 | Ø A Max. | | B | | C | | Ø D | | E | | F | |
|------------|---|----------|------|-------|------|-------|------|------|-----|------|-----|------|------|
| | | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. |
| 09 | 650FS001*09 | .572 | 14.5 | .719 | 18.3 | .938 | 23.8 | .128 | 3.3 | .085 | 2.2 | .727 | 18.5 |
| 11 | 650FS001*11 | .701 | 17.8 | .812 | 20.6 | 1.031 | 26.2 | .128 | 3.3 | .085 | 2.2 | .727 | 18.5 |
| 13 | 650FS001*13 | .851 | 21.6 | .906 | 23.0 | 1.125 | 28.6 | .128 | 3.3 | .085 | 2.2 | .727 | 18.5 |
| 15 | 650FS001*15 | .976 | 24.8 | .969 | 24.6 | 1.219 | 31.0 | .128 | 3.3 | .085 | 2.2 | .727 | 18.5 |
| 17 | 650FS001*17 | 1.101 | 28.0 | 1.062 | 27.0 | 1.312 | 33.3 | .128 | 3.3 | .085 | 2.2 | .727 | 18.5 |
| 19 | 650FS001*19 | 1.208 | 30.7 | 1.156 | 29.4 | 1.438 | 36.5 | .128 | 3.3 | .085 | 2.2 | .727 | 18.5 |
| 21 | 650FS001*21 | 1.333 | 33.9 | 1.250 | 31.8 | 1.562 | 39.7 | .128 | 3.3 | .115 | 2.9 | .697 | 17.7 |
| 23 | 650FS001*23 | 1.458 | 37.0 | 1.375 | 34.9 | 1.688 | 42.9 | .147 | 3.7 | .115 | 2.9 | .697 | 17.7 |
| 25 | 650FS001*25 | 1.583 | 40.2 | 1.500 | 38.1 | 1.812 | 46.0 | .147 | 3.7 | .115 | 2.9 | .697 | 17.7 |

650FS002 DUMMY RECEPTACLE FOR MIL-DTL-38999 SERIES II BAYONET CONNECTORS

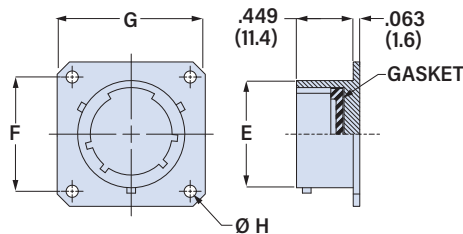

Use dummy storage receptacle to secure and protect unused plugs. 650FS002 receptacle accommodates MIL-DTL-38999 Series II bayonet coupling connectors. Silicone gasket, stainless steel bayonet pins.

TABLE 1 FINISH CODES

| Aluminum | Stainless Steel |
|------------------------------|---------------------|
| C Black Anodize | Z1 Passivate |
| M Electroless Nickel | |
| NF Olive Drab Cadmium | |
| MT Nickel-PTFE | |
| ZR Black Zinc-Nickel | |
| TZ Tin-Zinc | |

| Shell Size | Part Number * = Finish Code from Table 1 | Ø E Max. | | F | | G Max. | | H | |
|------------|---|----------|------|-------|------|--------|------|------|-----|
| | | in. | mm. | in. | mm. | in. | mm. | in. | mm. |
| 08 | 650FS002*08 | .474 | 12.0 | .594 | 15.1 | .823 | 20.9 | .120 | 3.0 |
| 10 | 650FS002*10 | .591 | 15.0 | .719 | 18.3 | .949 | 24.1 | .120 | 3.0 |
| 12 | 650FS002*12 | .751 | 19.1 | .812 | 20.6 | 1.042 | 26.5 | .120 | 3.0 |
| 14 | 650FS002*14 | .876 | 22.3 | .906 | 23.0 | 1.136 | 28.9 | .120 | 3.0 |
| 16 | 650FS002*16 | 1.001 | 25.4 | .969 | 24.6 | 1.230 | 31.2 | .120 | 3.0 |
| 18 | 650FS002*18 | 1.126 | 28.6 | 1.062 | 27.0 | 1.323 | 33.6 | .120 | 3.0 |
| 20 | 650FS002*20 | 1.251 | 31.8 | 1.156 | 29.4 | 1.449 | 36.8 | .120 | 3.0 |
| 22 | 650FS002*22 | 1.376 | 35.0 | 1.250 | 31.8 | 1.573 | 40.0 | .120 | 3.0 |
| 24 | 650FS002*24 | 1.501 | 38.1 | 1.375 | 34.9 | 1.699 | 43.2 | .147 | 3.7 |