


# Datamate J-Tek Connectors

## Female Crimp Kit with Hood

- Supplied as a complete kit: jackscrews assembled to housing; hood, contacts and assembly screws supplied loose.
- Provides strain relief by preventing cable bending at the rear of the connector, and also has the option of inserting a cable tie to reduce pull strain.

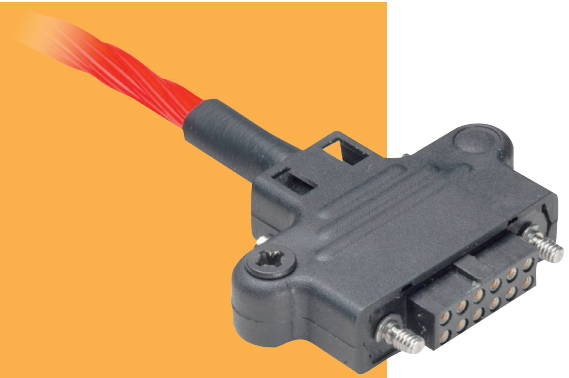

DATAMATE J-TEK

FEMALE		CALCULATION											
		<b>A</b>	$B + 21.5$										
		<b>B</b>	Total no. of contacts - 2										
		<b>C</b>	$B + 7$										
TOOLS		WIRE STRIPPING DETAILS											
<p><b>Recommended Crimp Tool</b> - M22520/2-01  <b>Positioner</b> - T5747  <b>Contact Insertion/Removal Tool</b> - Z80-280</p> <ul style="list-style-type: none"> <li>➤ Spare and pre-cabled contacts shown on following pages.</li> <li>➤ Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a>.</li> </ul>													
HOW TO ORDER													
<p><b>SERIES CODE</b></p> <p><b>TYPE</b></p> <table border="1"> <tr> <td><b>0</b></td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td><b>1</b></td> <td>Large Bore (22 AWG)</td> </tr> </table>		<b>0</b>	Small Bore (24-28 AWG)	<b>1</b>	Large Bore (22 AWG)	<p><b>M80 - 94 X XX XX</b></p> <table border="1"> <thead> <tr> <th colspan="2">FINISH</th> </tr> </thead> <tbody> <tr> <td><b>05</b></td> <td>Gold</td> </tr> <tr> <td><b>42</b></td> <td>Gold + Tin</td> </tr> </tbody> </table> <p><b>TOTAL NO. OF CONTACTS</b></p> <p>06, 08, 10, 12, 14, 20, 26, 34, 42, 50</p>		FINISH		<b>05</b>	Gold	<b>42</b>	Gold + Tin
<b>0</b>	Small Bore (24-28 AWG)												
<b>1</b>	Large Bore (22 AWG)												
FINISH													
<b>05</b>	Gold												
<b>42</b>	Gold + Tin												

All dimensions in mm.