
telfuse pertise Applied Answers Delivered

P6SMB11AT3G Series

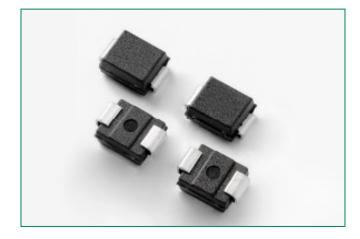

Maximum Ratings and Thermal Characteristics

Parameter	Symbol	Value	Unit
Peak Power Dissipation (Note 1) @ $T_L = 25^{\circ}$ C, Pulse Width = 1 ms	P _{PK}	600	W
DC Power Dissipation @ TL = 75°C Measured Zero Lead Length (Note 2) Derate Above 75°C	PD	3.0 40	W mW/°C
Thermal Resistance from Junction-to- Lead	R _{JL}	25	°C/W
DC Power Dissipation (Note 3) @ TA = 25°C Derate Above 25°C Thermal Resistance from Junction–to– Ambient	pd R _{oja}	0.55 4.4 226	W mW/°C °C/W
Operating and Storage Temperature Range	T _{J,} T _{stg}	-65 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. 10 X 1000 µs, non-repetitive.
- 2. 1" square copper pad, FR-4 board.
- 3. FR-4 board, using Littelfuse minimum recommended footprint, as shown in 403A-03 case outline dimensions spec.
- 4. 1/2 sine wave (or equivalent square wave), PW = 8.3 ms, duty cycle = 4 pulses per minute maximum

Description

The P6SMB11AT3G series is designed to protect voltage sensitive components from high voltage, high energy transients. They have excellent clamping capability, high surge capability, low zener impedance and fast response time. The P6SMB11AT3G series is supplied in the Littelfuse exclusive, cost-effective, highly reliable package and is ideally suited for use in communication systems, automotive, numerical controls, process controls, medical equipment, business machines, power supplies and many other industrial/consumer applications.

Po

Features

- Working Peak Reverse Voltage Range 9.4 to 77.8 V
- Standard Zener Breakdown Voltage Range 11 to 91 V
- Peak Power 600 W @ 1 ms
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- Maximum Clamp Voltage @ Peak Pulse Current
- Low Leakage < 5 μA Above 10 V
- UL 497B for Isolated Loop Circuit Protection
- Response Time is Typically < 1 ns
- These are Pb-Free Devices

Functional Diagram



Additional Information

Ý






Resources

*Please see P6SMB6.8AT3 to P6SMB200AT3 for Unidirectional devices.



Surface Mount > 600W > P6SMB11AT3G Series

I-V Curve Characteristics (T_A = 25°C unless otherwise noted)



Symbol	Parameter
I _{PP}	Maximum Reverse Peak Pulse Current
V _c	Clamping Voltage @ I _{PP}
V _{RWM}	Working Peak Reverse Voltage
I _R	Maximum Reverse Leakage Current @V _{RVM}
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current
eV _{BR}	Maximum Temperature Coefficient of $V_{_{BR}}$



Surface Mount > 600W > P6SMB11AT3G Series

Electrical Characteristics (Devices listed in bold, italic are Littelfuse Preferred devices)

			Breakdown Voltage				V _C @ I _{PP} (Note 6)		V _{BR}	C _{Typ.} (Note 7)	
Device*	Device Marking	(Note 6)	V _{rwm}	V _{BR} @ I _T (V) (Note 5) @ I _T			V _c	۱ _{PP}	* BR	(Note 7)	
		Volts	μA	MIN	NOM	MAX	mA	Volts	Amps	%/°C	pF
P6SMB11CAT3G	11C	9.4	5	10.5	11.05	11.6	1	15.6	38	0.075	865
P6SMB12CAT3G	12C	10.2	5	11.4	12	12.6	1	16.7	36	0.078	800
P6SMB15CAT3G	15C	12.8	5	14.3	15.05	15.8	1	21.2	28	0.084	645
P6SMB16CAT3G	16C	13.6	5	15.2	16	16.8	1	22.5	27	0.086	610
P6SMB18CAT3G	18C	15.3	5	17.1	18	18.9	1	25.2	24	0.088	545
P6SMB20CAT3G	20C	17.1	5	19	20	21	1	27.7	22	0.09	490
P6SMB22CAT3G	22C	18.8	5	20.9	22	23.1	1	30.6	20	0.09	450
P6SMB24CAT3G	24C	20.5	5	22.8	24	25.2	1	33.2	18	0.094	415
P6SMB27CAT3G	27C	23.1	5	25.7	27.05	28.4	1	37.5	16	0.096	370
P6SMB30CAT3G	30C	25.6	5	28.5	30	31.5	1	41.4	14.4	0.097	335
P6SMB33CAT3G	33C	28.2	5	31.4	33.05	34.7	1	45.7	13.2	0.098	305
P6SMB36CAT3G	36C	30.8	5	34.2	36	37.8	1	49.9	12	0.099	280
P6SMB39CAT3G	39C	33.3	5	37.1	39.05	41	1	53.9	11.2	0.1	260
P6SMB43CAT3G	43C	36.8	5	40.9	43.05	45.2	1	59.3	10.1	0.101	240
P6SMB47CAT3G	47C	40.2	5	44.7	47.05	49.4	1	64.8	9.3	0.101	220
P6SMB51CAT3G	51C	43.6	5	48.5	51.05	53.6	1	70.1	8.6	0.102	205
P6SMB56CAT3G	56C	47.8	5	53.2	56	58.8	1	77	7.8	0.103	185
P6SMB62CAT3G	62C	53	5	58.9	62	65.1	1	85	7.1	0.104	170
P6SMB68CAT3G	68C	58.1	5	64.6	68	71.4	1	92	6.5	0.104	155
P6SMB82CAT3G	82C	70.1	5	77.9	82	86.1	1	113	5.3	0.105	130

 A transient suppressor is normally selected according to the working peak reverse voltage (V_{RWM}), which should be equal to or greater than the DC or continuous peak operating voltage level.

5. $V_{_{\rm BR}}$ measured at pulse test current $I_{_{\rm T}}$ at an ambient temperature of 25°C.

6. Surge current waveform per Figure 2 and derate per Figure 3 of the General Data - 600 Watt at the beginning of this group.

7. Bias Voltage = 0 V, F = 1 MHz, $T_{J} = 25^{\circ}C$



Surface Mount > 600W > P6SMB11AT3G Series

Ratings and Characteristic Curves




Figure 3 - Pulse Derating Curve




Figure 5. Typical Protection Circuit




Figure 2. Pulse Waveform






Figure 4. Typical Junction Capacitance vs. Bias Voltage





Surface Mount > 600W > P6SMB11AT3G Series

Dimensions





D .		Inches		Millimeters			
Dim	Min Nom		Max	Min	Nom	Max	
А	0.077	0.091	0.097	1.95	2.30	2.47	
A1	0.002	0.004	0.008	0.05	0.10	0.20	
b	0.077	0.080	0.087	1.96	2.03	2.20	
С	0.006	0.009	0.012	0.15	0.23	0.31	
D	0.130	0.140	0.156	3.30	3.56	3.95	
E	0.160	0.170	0.181	4.06	4.32	4.60	
H _E	0.205	0.214	0.220	5.21	5.44	5.60	
L	0.030	0.040	0.063	0.76	1.02	1.60	
L1		0.020 REF			0.51 REF		


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

2. CONTROLLING DIMENSION: INCH.

3. D DIMENSION SHALL BE MEASURED WITHIN DIMENSION P.


Part Marking System



- xxC = Device Code A = Assembly Location Y = Year WW = Work Week
- = Pb-Free Package

(Note: Microdot may be in either location)

Soldering Footrpint



ORDERING INFORMATION

Device	Package	Shipping	
P6SMBxxxAT3G	SMB (Pb–Free)	2,500 / Tape & Reel	

Flow/Wave Soldering (Solder Dipping)

Peak Temperature :	260°C
Dipping Time :	10 seconds

Physical Specifications

Case	Void-free, transfer-molded, thermosetting plastic
Polarity	Cathode indicated by polarity band
Mounting Position	Any
Finish	All external surfaces are corrosion resistant and leads are readily solderable
Leads	Modified L–Bend providing more contact area to bond pads

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littlefuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: <u>www.littlefuse.com/disclaimer-electronics</u>.