# ne<mark>x</mark>peria

#### Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <u>http://www.nxp.com</u>, <u>http://www.philips.com/</u> or <u>http://www.semiconductors.philips.com/</u>, use <u>http://www.nexperia.com</u>

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use **salesaddresses@nexperia.com** (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © Nexperia B.V. (year). All rights reserved.

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

# **74HC4020; 74HCT4020** 14-stage binary ripple counter Rev. 6 – 3 February 2016

#### **General description** 1.

The 74HT4020; 74HCT4020 is a 14-stage binary ripple counter with a clock input (CP), an overriding asynchronous master reset input (MR) and 12 buffered parallel outputs (Q0, and Q3 to Q13). The counter advances on the HIGH-to-LOW transition of CP. A HIGH on MR clears all counter stages and forces all outputs LOW, independent of the state of CP. Each counter stage is a static toggle flip-flop. This device features reduced input threshold levels to allow interfacing to TTL logic levels. Inputs also include clamp diodes, this enables the use of current limiting resistors to interface inputs to voltages in excess of V<sub>CC</sub>.

#### 2. **Features and benefits**

- Wide supply voltage range from 2.0 V to 6.0 V
- Input levels:
  - For 74HC4020: CMOS level
  - For 74HCT4020: TTL level
- Multiple package options
- Complies with JEDEC standard no. 7A
- Specified from –40 °C to +85 °C and from –40 °C to +125 °C

#### **Applications** 3.

- Frequency dividing circuits
- Time delay circuits
- Control counters

#### **Ordering information** 4.

#### Table 1. **Ordering information**


Type number	Package								
	Temperature range	Name	Description	Version					
74HC4020D	–40 °C to +125 °C	SO16	plastic small outline package; 16 leads;	SOT109-1					
74HCT4020D			body width 3.9 mm						
74HC4020DB	–40 °C to +125 °C	SSOP16	plastic shrink small outline package; 16 leads; body	SOT338-1					
74HCT4020DB			width 5.3 mm						




#### Type number Package Temperature range Name Description Version 74HC4020PW –40 °C to +125 °C TSSOP16 plastic thin shrink small outline package; 16 leads; SOT403-1 body width 4.4 mm 74HCT4020PW 74HC4020BQ –40 °C to +125 °C DHVQFN16 plastic dual in-line compatible thermal enhanced SOT763-1 very thin quad flat package; no leads; 16 terminals; 74HCT4020BQ body $2.5 \times 3.5 \times 0.85$ mm


#### Table 1. Ordering information ...continued

# 5. Functional diagram

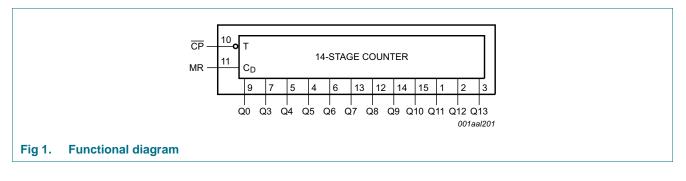


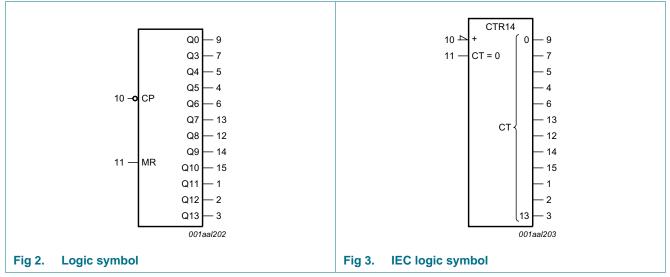

#### 14-stage binary ripple counter

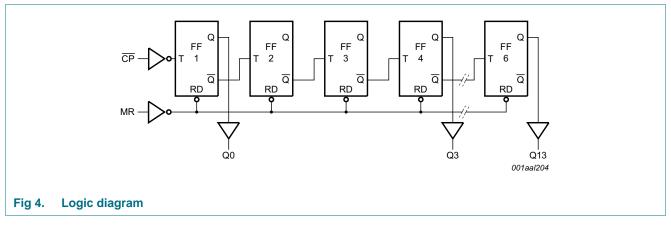

## 6. Pinning information

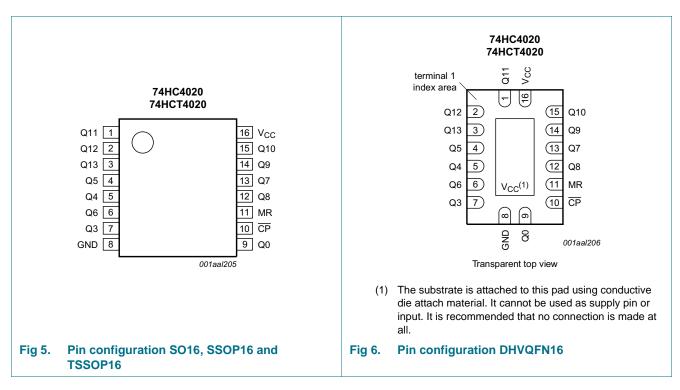

## 6.1 Pinning

## 6.2 Pin description

Symbol	Pin	Description
Q0, Q3 to Q13	9, 7, 5, 4, 6, 13, 12, 14, 15, 1, 2, 3	output
GND	8	ground (0 V)
CP	10	clock input (HIGH-to-LOW, edge-triggered)
MR	11	master reset input (active HIGH)
V <sub>CC</sub>	16	positive supply voltage

<sup>74</sup>HC\_HCT4020

All information provided in this document is subject to legal disclaimers.


© NXP Semiconductors N.V. 2016. All rights reserved.

# 7. Functional description

Table 3.	Table 3. Function table							
Input		Output						
СР		MR	Q0, Q3 to Q13					
↑		L	no change					
$\downarrow$		L	count					
Х		Н	L					

[1] H = HIGH voltage level; L = LOW voltage level; X = don't care;  $\uparrow$  = LOW-to-HIGH clock transition;  $\downarrow$  = HIGH-to-LOW clock transition.

## 7.1 Timing diagram

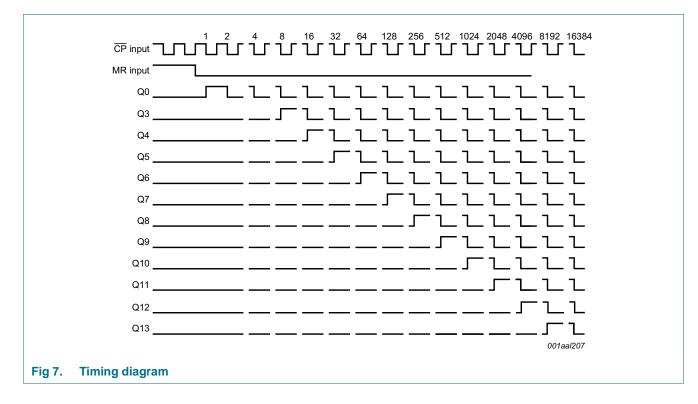

## 8. Limiting values

#### Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	supply voltage		-0.5	+7	V
I <sub>IK</sub>	input clamping current	$V_{I} < -0.5$ V or $V_{I} > V_{CC}$ + 0.5 V	-	±20	mA
I <sub>OK</sub>	output clamping current	$V_{I} < -0.5$ V or $V_{I} > V_{CC}$ + 0.5 V	-	±20	mA
lo	output current	$-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$	-	±25	mA
I <sub>CC</sub>	supply current		-	±50	mA
I <sub>GND</sub>	ground current		-	±50	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C
P <sub>tot</sub>	total power dissipation	$T_{amb} = -40 \text{ °C to } +125 \text{ °C}$	[1]		
		SO16, SSOP16, TSSOP16 and DHVQFN16 packages	-	500	mW

For SO16 package: Ptot derates linearly with 8 mW/K above 70 °C.
 For SSOP16 and TSSOP16 packages: Ptot derates linearly with 5.5 mW/K above 60 °C.
 For DHVQFN16 package: Ptot derates linearly with 4.5 mW/K above 60 °C.

# 9. Recommended operating conditions

#### Table 5. Recommended operating conditions

Symbol	Parameter	Conditions	7	4HC402	20	74	HCT40	20	Unit
			Min	Тур	Max	Min	Тур	Max	
V <sub>CC</sub>	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
$\Delta t / \Delta V$	input transition rise and fall rate	except for Schmitt trigger inputs							
		V <sub>CC</sub> = 2.0 V	-	-	625	-	-	-	ns/V
		V <sub>CC</sub> = 4.5 V	-	1.67	139	-	1.67	139	ns/V
		V <sub>CC</sub> = 6.0 V	-	-	83	-	-	-	ns/V
T <sub>amb</sub>	ambient temperature		-40	+25	+125	-40	+25	+125	°C

# **10. Static characteristics**

#### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		–40 °C t	o +85 °C	-40 °C te	o +125 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC40	20									1
V <sub>IH</sub>	HIGH-level	V <sub>CC</sub> = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V
	input voltage	V <sub>CC</sub> = 4.5 V	3.15	2.4	-	3.15	-	3.15	-	V
		V <sub>CC</sub> = 6.0 V	4.2	3.2	-	4.2	-	4.2	-	V
V <sub>IL</sub>	LOW-level	V <sub>CC</sub> = 2.0 V	-	0.8	0.5	-	0.5	-	0.5	V
	input voltage	$V_{CC} = 4.5 V$	-	2.1	1.35	-	1.35	-	1.35	V
		V <sub>CC</sub> = 6.0 V	-	2.8	1.8	-	1.8	-	1.8	V
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}$								
	output voltage	$I_{O} = -20 \ \mu A; \ V_{CC} = 2.0 \ V$	1.9	2.0	-	1.9	-	1.9	-	V
		$I_{O} = -20 \ \mu A; \ V_{CC} = 4.5 \ V$	4.4	4.5	-	4.4	-	4.4	-	V
		$I_{O} = -20 \ \mu A; \ V_{CC} = 6.0 \ V$	5.9	6.0	-	5.9	-	5.9	-	V
		$I_{O}$ = -4.0 mA; $V_{CC}$ = 4.5 V	3.98	4.32	-	3.84	-	3.7	-	V
		$I_{O} = -5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.48	5.81	-	5.34	-	5.2	-	V
V <sub>OL</sub> LOW-level	$V_{I} = V_{IH} \text{ or } V_{IL}$									
	output voltage	$I_0 = 20 \ \mu A; \ V_{CC} = 2.0 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O} = 20 \ \mu A; \ V_{CC} = 4.5 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O} = 20 \ \mu A; \ V_{CC} = 6.0 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O}$ = 4.0 mA; $V_{CC}$ = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V
		$I_{O} = 5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.26	-	0.33	-	0.4	V
I	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 V$	-	-	±0.1	-	±1	-	±1	μA
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0$ V	-	-	8.0	-	80	-	160	μA
CI	input capacitance		-	3.5	-	-	-	-	-	pF
74HCT4	020	1								
V <sub>IH</sub>	HIGH-level input voltage	$V_{CC}$ = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage	$V_{CC}$ = 4.5 V to 5.5 V	-	1.2	0.8	-	0.8	-	0.8	V
V <sub>он</sub>	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5 \text{ V}$								
	output voltage	I <sub>O</sub> = -20 μA	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -4.0 mA	3.98	4.32	-	3.84	-	3.7	-	V
V <sub>OL</sub>	LOW-level	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5 \text{ V}$								
	output voltage	$I_{O} = 20 \ \mu A; V_{CC} = 4.5 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O}$ = 4.0 mA; $V_{CC}$ = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V
lı	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 V$	-	-	±0.1	-	±1	-	±1	μA

#### Table 6. Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C -		–40 °C t	o +85 °C	–40 °C to	Unit	
			Min	Тур	Max	Min	Max	Min	Max	
I <sub>CC</sub>	supply current	$\label{eq:VI} \begin{array}{l} V_{I} = V_{CC} \text{ or } GND; \ I_{O} = 0 \ A; \\ V_{CC} = 5.5 \ V \end{array}$	-	-	8.0	-	80	-	160	μA
Δl <sub>CC</sub>	additional supply current	$\label{eq:VI} \begin{array}{l} V_I = V_{CC} - 2.1 \ \text{V;} \ I_O = 0 \ \text{A;} \\ \text{other inputs at } V_{CC} \ \text{or GND;} \\ V_{CC} = 4.5 \ \text{V to } 5.5 \ \text{V} \end{array}$								
		pin MR	-	110	396	-	495	-	539	μA
		pin CP	-	85	306	-	383	-	417	μA
CI	input capacitance		-	3.5	-	-	-	-	-	pF

# **11. Dynamic characteristics**

#### Table 7.Dynamic characteristics

GND (ground = 0 V);  $C_L = 50 \text{ pF}$  unless otherwise specified; for test circuit, see <u>Figure 10</u>

Symbol	Parameter	Conditions		25 °C		-40 °C t	o +85 °C	–40 °C to	o +125 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC402	20			1	1			1		
t <sub>pd</sub>	propagation	CP to Q0; see Figure 8 [1]								
	delay	$V_{CC} = 2.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	-	39	140	-	175	-	210	ns
		$V_{CC} = 4.5 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	-	14	28	-	35	-	42	ns
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	11	-	-	-	-	-	ns
		$V_{CC} = 6.0 \text{ V}; C_{L} = 50 \text{ pF}$	-	11	24	-	30	-	36	ns
1		Qn to Qn+1; see Figure 9								
		$V_{CC} = 2.0 \text{ V}; C_{L} = 50 \text{ pF}$	-	22	75	-	95	-	110	ns
1		$V_{CC} = 4.5 \text{ V}; C_{L} = 50 \text{ pF}$	-	8	15	-	19	-	22	ns
l		$V_{CC} = 5.0 \text{ V}; C_{L} = 15 \text{ pF}$	-	6	-	-	-	-	-	ns
1		$V_{CC} = 6.0 \text{ V}; C_{L} = 50 \text{ pF}$	-	6	13	-	16	-	19	ns
t <sub>PHL</sub>	HIGH to LOW	MR to Qn; see Figure 8								
1	propagation	V <sub>CC</sub> =2.0 V; C <sub>L</sub> = 50 pF	-	55	170	-	215	-	225	ns
1	delay	$V_{CC} = 4.5 \text{ V}; C_{L} = 50 \text{ pF}$	-	20	34	-	43	-	51	ns
1		$V_{CC} = 5.0 \text{ V}; C_{L} = 15 \text{ pF}$	-	17	-	-	-	-	-	ns
1		$V_{CC} = 6.0 \text{ V}; C_{L} = 50 \text{ pF}$	-	16	29	-	37	-	43	ns
t <sub>t</sub>	transition	Qn; see Figure 8 [2]								
	time	$V_{CC} = 2.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	-	19	75	-	95	-	110	ns
		$V_{CC} = 4.5 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	-	7	15	-	19	-	22	ns
		$V_{CC} = 6.0 \text{ V}; C_{L} = 50 \text{ pF}$	-	6	13	-	16	-	19	ns

14-stage binary ripple counter

#### Table 7. Dynamic characteristics ...continued

GND (ground = 0 V);  $C_L$  = 50 pF unless otherwise specified; for test circuit, see Figure 10

Symbol	Parameter	Conditions		25 °C	;	–40 °C t	o +85 °C	–40 °C to +125 °C		Unit
			Mir	Тур	Max	Min	Max	Min	Max	
t <sub>W</sub>	pulse width	CP HIGH or LOW;								
		see <u>Figure 8</u>								
		$V_{CC} = 2.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	80	14	-	100	-	120	-	ns
		$V_{CC} = 4.5 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	16	4	-	20	-	24	-	ns
		$V_{CC} = 6.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	14	3	-	17	-	20	-	ns
		MR HIGH; see Figure 8								
		$V_{CC} = 2.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	80	17	-	100	-	120	-	ns
		$V_{CC}$ = 4.5 V; $C_{L}$ = 50 pF	16	6	-	20	-	24	-	ns
		$V_{CC} = 6.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	14	5	-	17	-	20	-	ns
t <sub>rec</sub>	recovery time	MR to CP; see Figure 8								
		$V_{CC} = 2.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	50	6	-	65	-	75	-	ns
		$V_{CC} = 4.5 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	10	2	-	13	-	15	-	ns
		$V_{CC} = 6.0 \text{ V}; C_{L} = 50 \text{ pF}$	9	2	-	11	-	13	-	ns
f <sub>max</sub>	maximum	see Figure 8								
	frequency	$V_{CC} = 2.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	6.0	30	-	4.8	-	4.0	-	MHz
		$V_{CC} = 4.5 \text{ V}; C_{L} = 50 \text{ pF}$	30	92	-	24	-	20	-	MHz
		$V_{CC} = 5.0 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$	-	101	-	-	-	-	-	MHz
		$V_{CC} = 6.0 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	35	109	-	28	-	24	-	MHz
C <sub>PD</sub>	power dissipation capacitance		[3] _	19	-	-	-	-	-	pF
74HCT4	020	1				1		1		
t <sub>pd</sub>	propagation	CP to Q0; see Figure 8	<u>[1]</u>							
	delay	V <sub>CC</sub> = 4.5 V; C <sub>L</sub> = 50 pF	-	18	36	-	45	-	54	ns
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	15	-	-	-	-	-	ns
		Qn to Qn+1; see Figure 9								
		V <sub>CC</sub> = 4.5 V; C <sub>L</sub> = 50 pF	-	8	15	-	19	-	22	ns
		$V_{CC} = 5.0 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$	-	6	-	-	-	-	-	ns
t <sub>PHL</sub>	HIGH to LOW	MR to Qn; see Figure 8								
	propagation	$V_{CC} = 4.5 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	-	22	45	-	56	-	68	ns
	delay	$V_{CC} = 5.0 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$	-	19	-	-	-	-	-	ns
t <sub>t</sub>	transition		[2]							
l.	time	$V_{CC} = 4.5 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	-	7	15	-	19	-	22	ns
t <sub>W</sub>	pulse width	CP HIGH or LOW;								
		see Figure 8				05		20		80
		$V_{CC} = 4.5 \text{ V}; C_{L} = 50 \text{ pF}$	20	7	-	25	-	30	-	ns
		MR HIGH; see Figure 8				67				
		$V_{CC} = 4.5 \text{ V}; C_{L} = 50 \text{ pF}$	20	8	-	25	-	30	-	ns
t <sub>rec</sub>	recovery time	MR to CP; see Figure 8								
		$V_{CC} = 4.5 \text{ V}; \text{ C}_{L} = 50 \text{ pF}$	10	2	-	13	-	15	-	ns

14-stage binary ripple counter

#### Table 7. Dynamic characteristics ... continued

GND (ground = 0 V);  $C_L$  = 50 pF unless otherwise specified; for test circuit, see Figure 10

Symbol	Parameter	Conditions	25 °C		–40 °C to	o +85 °C	–40 °C to	Unit		
			Min	Тур	Max	Min	Max	Min	Max	
f <sub>max</sub>	f <sub>max</sub> maximum frequency	see Figure 8								
		$V_{CC} = 4.5 \text{ V}; C_{L} = 50 \text{ pF}$	25	47	-	20	-	17	-	MHz
		$V_{CC} = 5.0 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$	-	52	-	-	-	-	-	MHz
C <sub>PD</sub>	power dissipation capacitance	[3]	-	20	-	-	-	-	-	pF

- [1]  $t_{pd}$  is the same as  $t_{PHL}$  and  $t_{PLH}$ .
- [2]  $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ .
- [3]  $C_{PD}$  is used to determine the dynamic power dissipation (P<sub>D</sub> in  $\mu$ W).

$$\begin{split} P_{D} &= C_{PD} \times V_{CC}^{2} \times f_{i} + \Sigma \; (C_{L} \times V_{CC}^{2} \times f_{o}) \; \text{where:} \\ f_{i} &= \text{input frequency in MHz;} \end{split}$$


 $f_o = output frequency in MHz;$ 

 $\Sigma (C_L \times V_{CC}^2 \times f_o) =$  sum of outputs;


 $C_L$  = output load capacitance in pF;

 $V_{CC}$  = supply voltage in V.

# 12. Waveforms

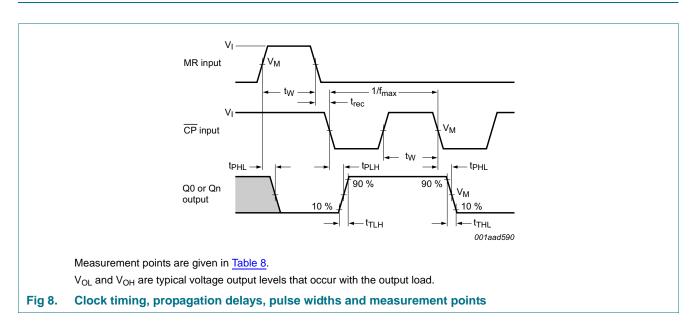


#### 14-stage binary ripple counter

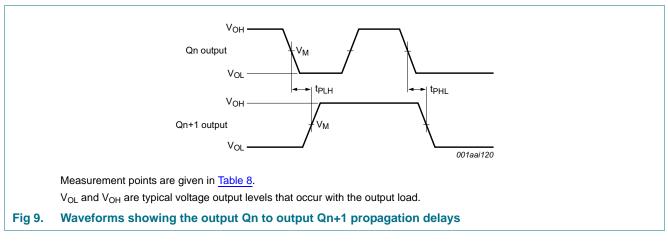

#### Table 8.Measurement points

Туре	Input	Output
	V <sub>M</sub>	V <sub>M</sub>
74HC4020	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
74HCT4020	1.3 V	1.3 V

#### 14-stage binary ripple counter

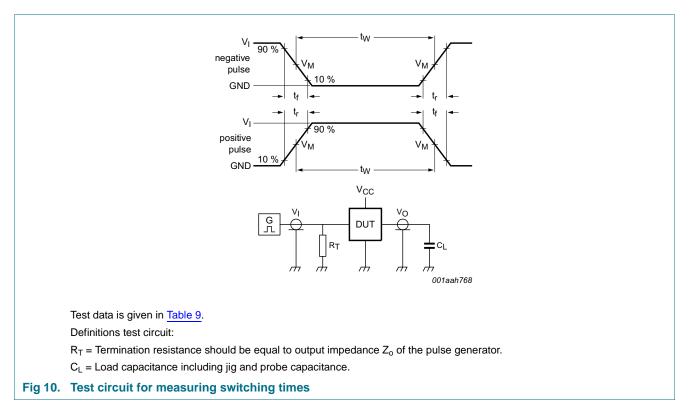


#### Table 9. Test data

Туре	Input	Load	
	VI	t <sub>r</sub> , t <sub>f</sub>	CL
74HC4020	V <sub>CC</sub>	6 ns	15 pF, 50 pF
74HCT4020	3 V	6 ns	15 pF, 50 pF


14-stage binary ripple counter

## 13. Package outline

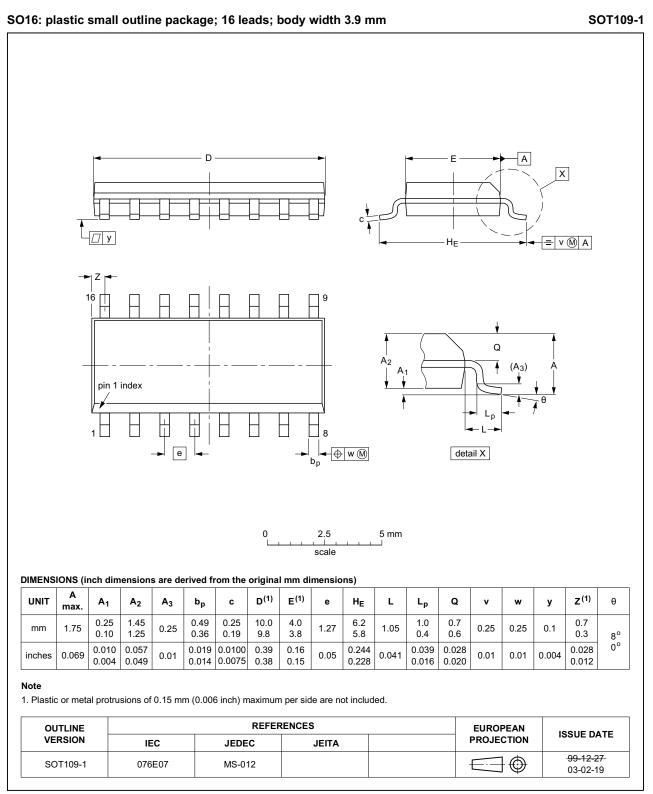


#### Fig 11. Package outline SOT109-1 (SO16)

14-stage binary ripple counter

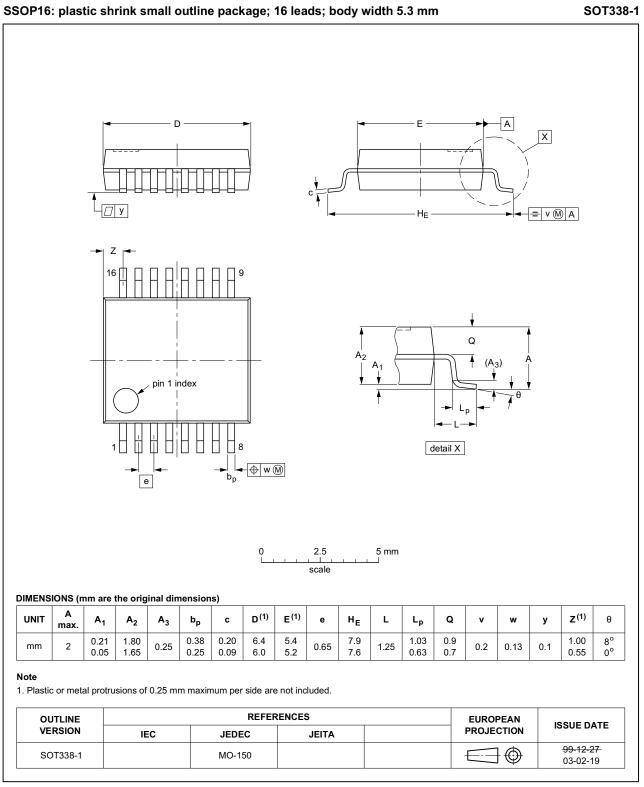

#### Fig 12. Package outline SOT338-1 (SSOP16)

14-stage binary ripple counter

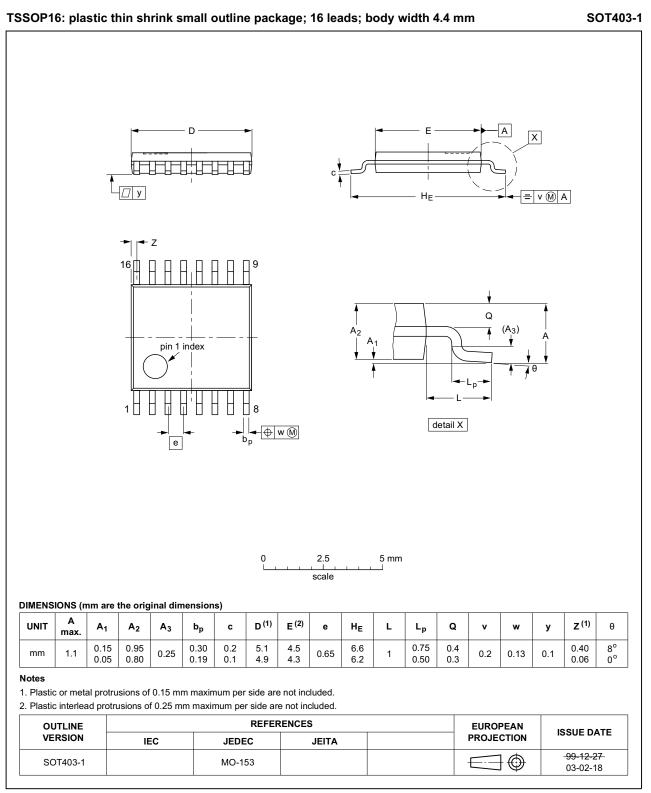


#### Fig 13. Package outline SOT403-1 (TSSOP16)

74HC\_HCT4020

Product data sheet

14-stage binary ripple counter

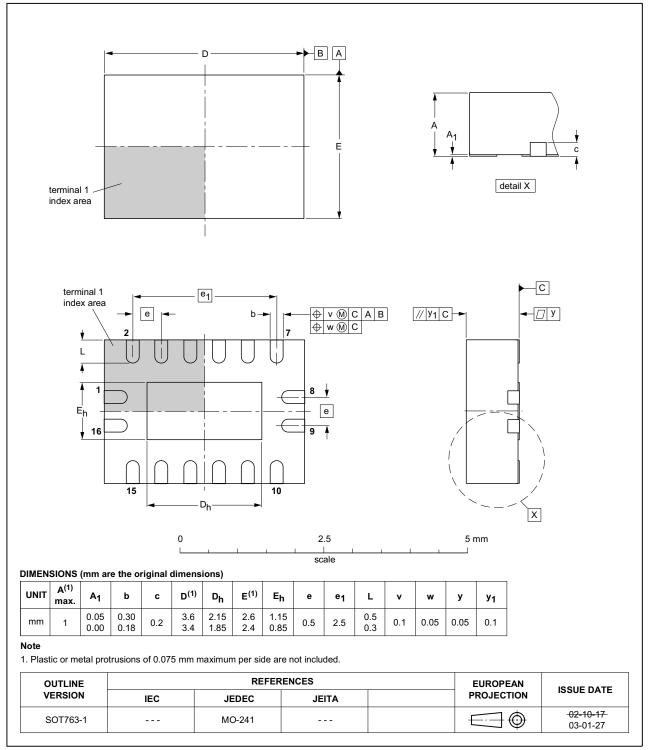

DHVQFN16: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 x 3.5 x 0.85 mm SOT763-1

#### Fig 14. Package outline SOT763-1 (DHVQFN16)

# 14. Abbreviations

Table 10. Abbreviations	
Acronym	Abbreviation
CMOS	Complementary Metal Oxide Semiconductor
DUT	Device Under Test

# 15. Revision history

#### Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes	
74HC_HCT4020 v.6	20160203	Product data sheet	-	74HC_HCT4020 v.5	
Modifications:	<ul> <li>Type numbers 74HC4020N and 74HCT4020N (SOT38-4) removed.</li> </ul>				
74HC_HCT4020 v.5	20120806	Product data sheet	-	74HC_HCT4020 v.4	
Modifications:	Measurement points added to figure 8 (errata).				
74HC_HCT4020 v.4	20111213	Product data sheet	-	74HC_HCT4020 v.3	
Modifications:	Legal pages updated.				
74HC_HCT4020 v.3	20100120	Product data sheet	-	74HC_HCT4020_CNV v.2	
74HC_HCT4020_CNV v.2	19970901	Product specification	-	-	

# 16. Legal information

## 16.1 Data sheet status

Document status <sup>[1][2]</sup>	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

## 16.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

## 16.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

#### 14-stage binary ripple counter

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

# 17. Contact information

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

For more information, please visit: <a href="http://www.nxp.com">http://www.nxp.com</a>

For sales office addresses, please send an email to: salesaddresses@nxp.com

#### 14-stage binary ripple counter

## **18. Contents**

1	General description 1
2	Features and benefits 1
3	Applications 1
4	Ordering information 1
5	Functional diagram 2
6	Pinning information 3
6.1	Pinning
6.2	Pin description 3
7	Functional description 4
7.1	Timing diagram 4
8	Limiting values 5
9	Recommended operating conditions 5
10	Static characteristics 6
11	Dynamic characteristics 7
12	Waveforms 9
13	Package outline 12
14	Abbreviations 16
15	Revision history 16
16	Legal information 17
16.1	Data sheet status 17
16.2	Definitions 17
16.3	Disclaimers 17
16.4	Trademarks 18
17	Contact information 18
18	Contents 19

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP Semiconductors N.V. 2016.

#### All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 3 February 2016 Document identifier: 74HC\_HCT4020