

# QPQ1061 L2 Low Loss GPS SAW Filter

#### **General Description**

QPQ1061 is a L2 GPS Band Pass Filter in a compact size for use in any GPS application. Designed for rejection of unwanted GPS signals, this SAW filter also has excellent power handling capability for low power transmitters.


Housed in a 1.4 x 1.2 mm laminate with over mold package, this device allows for a compact and cost-effective diplexer solution for GPS applications.

No matching components are required, making the PCB design and implementation easy.

# -doc/10

1.4 X 1.2 X 0.84 mm

#### **Functional Block Diagram**



#### **Pin Configuration - Single Ended**

Pin No.	Label
1	Antenna Input (1)
2, 3, 5	Ground
4	L2 Output (1)

(1) Blocking capacitors are required on any ports where a DC voltage may be present.

#### **Product Features**

- Usable bandwidth 31 MHz
- No matching required for operation at 50Ω
- Excellent rejection for GPS operation
- High Isolation
- High Rejection
- Laminate with Over Mold Surface Mount Package (SMP)
- Small Size: 1.4 x 1.2 x 0.84mm

Performance is typical across frequency. Please reference electrical specification table and data plots for more details.

#### **Applications**

- General purpose GPS
- Communication Systems

#### **Ordering Information**

Part No.	Description
QPQ1061TR7	7" Taped Reel with 2500 pieces
QPQ1061EVB	Evaluation board



# QPQ1061 L2 Low Loss GPS SAW Filter

#### **Absolute Maximum Ratings**

Parameter	Rating		
Storage Temperature	-55 to 125°C		
Operation Temperature	-55 to 105°C		
RF Input Power <sup>(1)</sup> - Test conditions: PW = 200ms; DC = 50% @ +25 °C	34 dBm		

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

#### **Minimum Lifetime Ratings**

Conditions	Rating		
RF Input Power <sup>(1),</sup> @ Pin 1 (Antenna Port), @ Pin 4 (L2 Port)	>10 years @ +95C		
	>5 years @ +105C		

<sup>(1)</sup> Input Power: CW, 25 dBm

#### **Electrical Specifications** (1,2)

L2 Band GPS							
Parameter (3)	Conditions	Min	Typical (4)	Max	Units		
Center Frequency	1212.1 - 1243.1 MHz	-	1227.6	-	MHz		
	1212.1 - 1243.1 MHz	-	1.2	2.0			
Maximum Insertion Loss	1215.6 - 1239.6 MHz	-	1.1	-	dB		
	1217.6 - 1237.6 MHz	-	1.1				
	1212.1 - 1243.1 MHz	-	0.4	0.9			
Amplitude Variation	1215.6 - 1239.6 MHz	-	0.3	-	dB		
	1217.6 - 1237.6 MHz	-	0.3	0.3 -			
Group Delay Variation	1212.1 - 1243.1 MHz	-	21	38	38 - ns		
	1215.6 - 1239.6 MHz	-	17	-			
	1217.6 - 1237.6 MHz	-	16	-	7		
Absolute Attenuation	10 - 1172.6 MHz	38	39	-	40		
(Relative to 0 dB)	1282.6 - 2500 MHz	35	37	-	dB		
	1212.1 - 1243.1 MHz	10	13.6	-			
Input Return Loss	1215.6 - 1239.6 MHz	-	14	-	dB		
	1217.6 - 1237.6 MHz	-	14	-			
	1212.1 - 1243.1 MHz	10	14	-			
Output Return Loss	1215.6 - 1239.6 MHz	-	15	-	dB		
	1217.6 - 1237.6 MHz	-	16	-			
Nominal Impedance (5)	Single Ended	-	50	-	Ohm		


#### Notes:


- 1. All specifications are based on the Qorvo schematics for the reference designs shown on page 3.
- 2. In production, devices will be tested at room temperature to a guard banded specification to ensure electrical compliance over temperature.
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacture tolerances.
- 4. Typical values are based on average measurements at room temperature on pcb. (25 °C ±5 °C)
- 5. Optimum impedance to achieve the performance shown.

<sup>(1)</sup> Input Power for both Input & Output ports



#### **Evaluation Board - QPQ1061-EVB**





Notes: Blocking capacitors are required on any RF ports where a DC voltage may be present.


## Bill of Material – QPQ1061-EVB


Reference Des.	Value	Description	Manuf.	Part Number
DUT	-	L2 Low Loss GPS SAW Filter	Qorvo	QPQ1061
SMA	-	SMA connector	Various	
PCB	-	Printed Circuit Board	Various	





#### **Typical Performances**


Test conditions unless otherwise noted: Temp = +25 °C,  $50 \Omega$  system



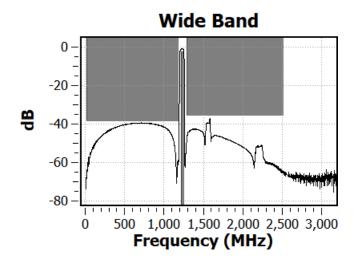








#### **Package Marking and Dimensions**

Marking: Qorvo Logo

Part Number - 1061


Trace Code - Assigned by subcontractor

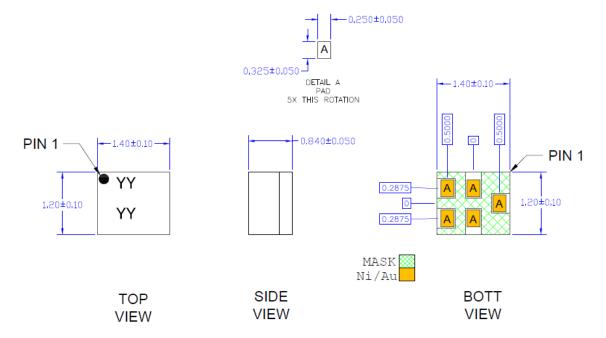

#### Notes:

- 1. All dimensions are in millimeters. Angles are in degrees.
- 2. The terminal #1 identifier and terminal numbering conform to JESD 95-1 SPP-012

### **PCB Mounting Pattern**

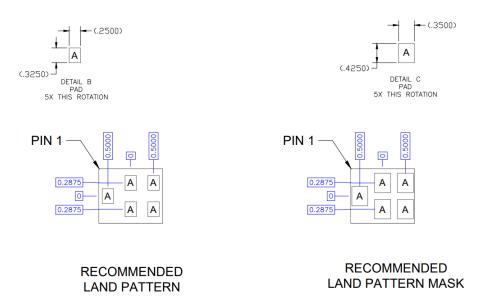

#### Notes:


1. All dimensions are in millimeters. Angles are in degrees. .



## **Assembly Notes**

- 1. Compatible with both Lead-free solder (260°C peak reflow temperature) and tin/lead (245°C peak reflow temp.) soldering processes.
- 2. Contact plating: ENEPIG.

#### **Recommended Soldering Profile**

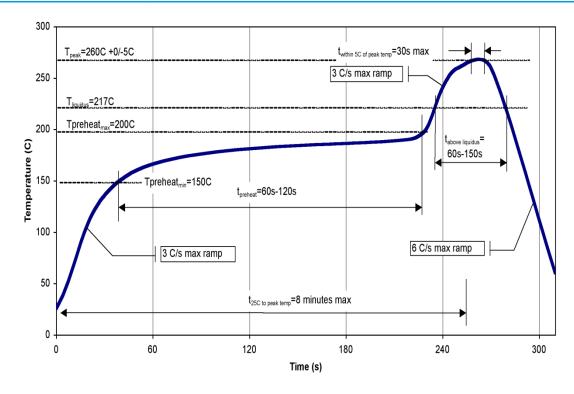



# QPQ1061 L2 Low Loss GPS SAW Filter

#### **Handling Precautions**

Parameter	Rating	Standard			
ESD – Human Body Model (HBM)	Class 3A	ESDA / JEDEC JS-001		Caution! ESD-Sensitive Device	
ESD-Charged Device Model (CDM)	Class C3	ESDA / JEDEC JS-002			
MSL – Moisture Sensitivity Level	Level 3	IPC/JEDEC J-STD-020	_		

#### **RoHS Compliance**

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- SVHC Free
- PFOS Free

#### **Contact Information**

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: <u>www.qorvo.com</u> Tel: 1-844-890-8163

Email: customer.support@qorvo.com

#### **Important Notice**

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein, or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, lifesaving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2022 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.