

Inductors for Standard Circuits

Wound Ferrite

NLV-EFD Series (For automobiles)

NLV25-EFD_{Type}

NLV25-EFD 2520 [1008 inch]*

* Dimensions Code JIS[EIA]



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

| <u> </u> |
|--|
| The storage period is less than 6 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. |
| On not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.). |
| Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C. |
| Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. |
| When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions. |
| Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design. |
| Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference. |
| ○ Use a wrist band to discharge static electricity in your body through the grounding wire. |
| On not expose the products to magnets or magnetic fields. |
| On not use for a purpose outside of the contents regulated in the delivery specifications. |
| The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. |
| If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions |

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)

set forth in the each catalog, please contact us.

- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.



Inductors for Standard Circuits Wound Ferrite

Product compatible with RoHS directive
Halogen-free
Compatible with lead-free solders
AEC-Q200

Overview of NLV25-EFD Type


FEATURES

- Resin mold type wound inductor for standard circuits.
- E-12 Series, wide lineup compatible with J (±5%) tolerance, can be used for applications that need to meet strict L tolerance such as filter circuits.
- O Has excellent inductance temperature characteristics in the operating temperature range.

APPLICATION

Vehicle accessories (car navigation systems, car audio, ETC)

PART NUMBER CONSTRUCTION

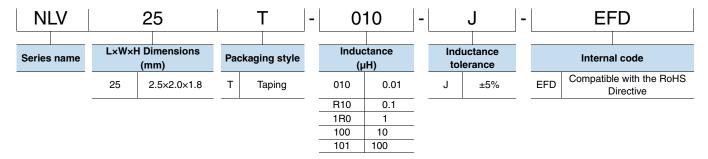

■ OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

| | Temperat | ure range | Package quantity | Individual weight | | |
|-----------|------------------------|-----------------------|------------------|-------------------|--|--|
| Туре | Operating temperature* | Storage temperature** | | | | |
| | (°C) | (°C) | (pieces/reel) | (mg) | | |
| NLV25-EFD | -40 to +105 | -40 to +105 | 2000 | 25 | | |

^{*} Operating temperature range includes self-temperature rise.


^{**} The Storage temperature range is for after the circuit board is mounted.

RoHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html

O Halogen-free: Indicates that CI content is less than 900ppm, Br content is less than 900ppm, and that the total CI and Br content is less than 1500ppm.




■ RECOMMENDED REFLOW PROFILE

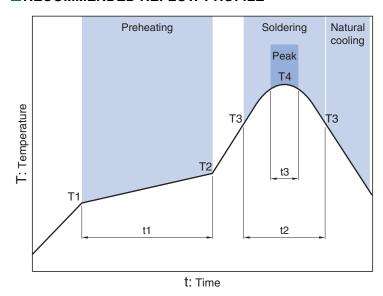

| Preheating | | Soldering | 3 | Peak | Peak | | |
|------------|----------|------------|-------|------------|-------|------------|--|
| Temp. | mp. Time | | Temp. | Temp. Time | | Temp. Time | |
| T1 | T2 | t1 | T3 | t2 | T4 | t3 | |
| 150°C | 180°C | 90 to 120s | 230°C | 40s | 255°C | 10s max. | |




■SHAPE & DIMENSIONS

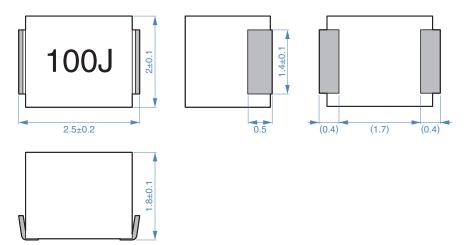



Dimensions in mm

■ RECOMMENDED LAND PATTERN



Dimensions in mm



■ ELECTRICAL CHARACTERISTICS

□ CHARACTERISTICS SPECIFICATION TABLE

| L | | Q L, Q meas frequency | | Self-resonant frequency | DC resistance | Rated current* | Part No. | | |
|-------|-----------|--------------------------|-------|----------------------------|---------------|----------------|-----------------|--|--|
| (μΗ) | Tolerance | min. (MHz) | | (MHz)min. (Ω) max. | | (mA)max. | | | |
| 0.01 | ±5% | 15 | 100 | 2150 | 0.26 | 530 | NLV25T-010J-EFD | | |
| 0.012 | ±5% | 15 | 100 | 2050 | 0.27 | 500 | NLV25T-012J-EFD | | |
| 0.015 | ±5% | 15 | 100 | 2000 | 0.29 | 480 | NLV25T-015J-EFD | | |
| 0.018 | ±5% | 15 | 100 | 1850 | 0.31 | 450 | NLV25T-018J-EFD | | |
| 0.022 | ±5% | 15 | 100 | 1650 | 0.37 | 420 | NLV25T-022J-EFD | | |
| 0.027 | ±5% | 15 | 100 | 1550 | 0.4 | 410 | NLV25T-027J-EFD | | |
| 0.033 | ±5% | 20 | 100 | 1450 | 0.42 | 400 | NLV25T-033J-EFD | | |
| 0.039 | ±5% | 20 | 100 | 1350 | 0.45 | 380 | NLV25T-039J-EFD | | |
| 0.047 | ±5% | 20 | 100 | 1200 | 0.5 | 360 | NLV25T-047J-EFD | | |
| 0.056 | ±5% | 20 | 100 | 1100 | 0.6 | 340 | NLV25T-056J-EFD | | |
| 0.068 | ±5% | 20 | 100 | 1050 | 0.65 | 320 | NLV25T-068J-EFD | | |
| 0.082 | ±5% | 20 | 100 | 900 | 0.75 | 300 | NLV25T-082J-EFD | | |
| 0.1 | ±5% | 20 | 100 | 800 | 0.8 | 280 | NLV25T-R10J-EFD | | |
| 0.12 | ±5% | 30 | 25.2 | 700 | 0.3 | 550 | NLV25T-R12J-EFD | | |
| 0.15 | ±5% | 30 | 25.2 | 550 | 0.35 | 500 | NLV25T-R15J-EFD | | |
| 0.18 | ±5% | 30 | 25.2 | 500 | 0.4 | 460 | NLV25T-R18J-EFD | | |
| 0.22 | ±5% | 30 | 25.2 | 450 | 0.5 | 430 | NLV25T-R22J-EFD | | |
| 0.27 | ±5% | 30 | 25.2 | 425 | 0.55 | 420 | NLV25T-R27J-EFD | | |
| 0.33 | ±5% | 30 | 25.2 | 400 | 0.6 | 400 | NLV25T-R33J-EFD | | |
| 0.39 | ±5% | 30 | 25.2 | 375 | 0.65 | 375 | NLV25T-R39J-EFD | | |
| 0.47 | ±5% | 30 | 25.2 | 350 | 0.68 | 350 | NLV25T-R47J-EFD | | |
| 0.56 | ±5% | 30 | 25.2 | 325 | 0.75 | 325 | NLV25T-R56J-EFD | | |
| 0.68 | ±5% | 30 | 25.2 | 300 | 0.85 | 300 | NLV25T-R68J-EFD | | |
| 0.82 | ±5% | 30 | 25.2 | 260 | 1 | 260 | NLV25T-R82J-EFD | | |
| 1 | ±5% | 30 | 7.96 | 245 | 1.1 | 245 | NLV25T-1R0J-EFD | | |
| 1.2 | ±5% | 30 | 7.96 | 230 | 1.2 | 230 | NLV25T-1R2J-EFD | | |
| 1.5 | ±5% | 30 | 7.96 | 182 | 1.3 | 220 | NLV25T-1R5J-EFD | | |
| 1.8 | ±5% | 30 | 7.96 | 135 | 1.45 | 210 | NLV25T-1R8J-EFD | | |
| 2.2 | ±5% | 30 | 7.96 | 105 | 1.55 | 200 | NLV25T-2R2J-EFD | | |
| 2.7 | ±5% | 30 | 7.96 | 70 | 1.7 | 195 | NLV25T-2R7J-EFD | | |
| 3.3 | ±5% | 30 | 7.96 | 55 | 1.9 | 185 | NLV25T-3R3J-EFD | | |
| 3.9 | ±5% | 30 | 7.96 | 48 | 2.1 | 180 | NLV25T-3R9J-EFD | | |
| 4.7 | ±5% | 30 | 7.96 | 43 | 2.3 | 175 | NLV25T-4R7J-EFD | | |
| 5.6 | ±5% | 25 | 7.96 | 42 | 2.5 | 170 | NLV25T-5R6J-EFD | | |
| 6.8 | ±5% | 25 | 7.96 | 39 | 2.7 | 165 | NLV25T-6R8J-EFD | | |
| 8.2 | ±5% | 25 | 7.96 | 36 | 3.05 | 160 | NLV25T-8R2J-EFD | | |
| 10 | ±5% | 25 | 2.52 | 33 | 3.5 | 155 | NLV25T-100J-EFD | | |
| 12 | ±5% | 25 | 2.52 | 30 | 3.8 | 150 | NLV25T-120J-EFD | | |
| 15 | ±5% | 25 | 2.52 | 26 | 4.4 | 140 | NLV25T-150J-EFD | | |
| 18 | ±5% | 25 | 2.52 | 24 | 4.8 | 130 | NLV25T-180J-EFD | | |
| 22 | ±5% | 25 | 2.52 | 22 | 5.5 | 125 | NLV25T-220J-EFD | | |
| 27 | ±5% | 25 | 2.52 | 21 | 6.3 | 115 | NLV25T-270J-EFD | | |
| 33 | ±5% | 25 | 2.52 | 20 | 7.1 | 110 | NLV25T-330J-EFD | | |
| 39 | ±5% | 20 | 2.52 | 18 | 9.5 | 90 | NLV25T-390J-EFD | | |
| 47 | ±5% | 20 | 2.52 | 17 | 11.1 | 80 | NLV25T-470J-EFD | | |
| 56 | ±5% | 20 | 2.52 | 16 | 12.1 | 75 | NLV25T-560J-EFD | | |
| 68 | ±5% | 20 | 2.52 | 15 | 16.6 | 70 | NLV25T-680J-EFD | | |
| 82 | ±5% | 20 | 2.52 | 13 | 19 | 66 | NLV25T-820J-EFD | | |
| 00 | ±5% | 15 | 0.796 | 12 | 21 | 60 | NLV25T-0200-EFD | | |

^{*} Rated current: smaller value of either ldc1 or ldc2.

ldc1: When based on the inductance change rate (10% below the initial L value) $\,$

Idc2: When based on the temperature increase (Temperature increase of 20°C by self heating)

O Measurement equipment


| Measurement item | Product No. | Manufacturer |
|-------------------------|-------------------------------------|-----------------------|
| L, Q | 4191A+16092A 4194A+16085A+16093B | Keysight Technologies |
| Self-resonant frequency | 8753C | Keysight Technologies |
| DC resistance | VP-2941A | Panasonic |

 $[\]begin{tabular}{ll} * & Equivalent measurement equipment may be used. \end{tabular}$



■ ELECTRICAL CHARACTERISTICS

L FREQUENCY CHARACTERISTICS GRAPH

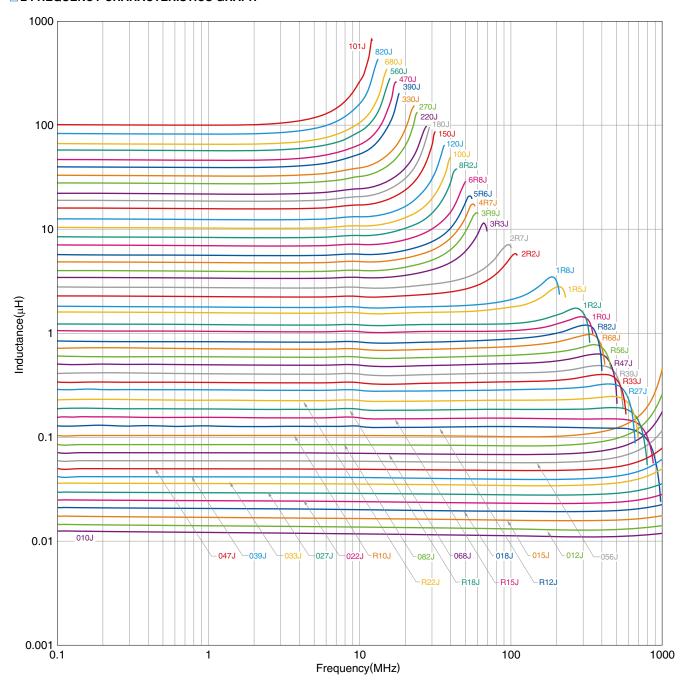

$\bigcirc \ {\it Measurement equipment}$


| Product No. | Manufacturer |
|-------------|-----------------------|
| 4291A | Keysight Technologies |
| 4294A | Keysight Technologies |

^{*} Equivalent measurement equipment may be used.



■ ELECTRICAL CHARACTERISTICS

□ Q FREQUENCY CHARACTERISTICS GRAPH

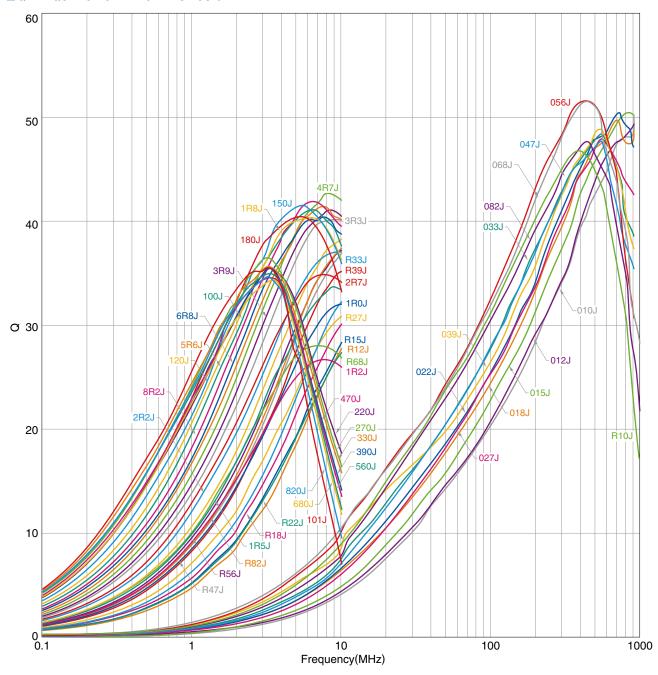

O Measurement equipment


| Product No. | Manufacturer |
|-------------|-----------------------|
| 4291A | Keysight Technologies |
| 4294A | Keysight Technologies |

^{*} Equivalent measurement equipment may be used.



■PACKAGING STYLE


REEL DIMENSIONS




| Туре | Α | W1 | W2 | N | Е |
|-----------|------|----|----|-----|-----|
| NLV25-EFD | ø180 | 9 | 13 | ø60 | 0.5 |

^{*} These values are typical values.

TAPE DIMENSIONS





Dimensions in mm

| Type | Α | В | øD0 | Е | F | P0 | P1 | P2 | W | K | t |
|-----------|-----|-----|------------|----------|-----------|-----------|-----------|-----------|-----------|---|-----|
| NLV25-EFD | 2.3 | 2.7 | 1.5+0.1/-0 | 1.75±0.1 | 3.50±0.05 | 4.00±0.10 | 4.00±0.10 | 2.00±0.05 | 8.00±0.30 | 2 | 0.4 |