

Power PCB Relay RT1 Inrush Power

- 1 pole 16 A, 1 NO contact (W pre-make contact + AgSnO₂)
- 10 A / 250 VAC making and breaking capacity acc. to IEC 60669-1
- 165 A / 20 ms inrush peak current
- Mono- or bistable coil
- 5 kV / 10 mm coil-contact
- **■** Reinforced insulation
- Optional test tab (manual operator)
- RoHS compliant (Directive 2002/95/EC)

Applications

Lighting systems, movement sensors, filament and incandescent lamp loads, motors



F0272-A


Approvals

Contoo	+ 40+				
commoa	uaia o	ι αρριστοί	i types c	Jii ioquosi	


Contact data	RT.3T	RTS3L		
Contact configuration	1 NO			
Contact set	pre-make contact	single contact		
Type of interruption	micro disconnection			
Rated current	16 /	4		
Rated voltage / max.switching voltage AC	250/400	VAC		
Limiting continuous current	16 A			
Maximum breaking capacity AC	4000 VA			
Limiting making capacity				
max 20 ms (incandescent lamps)	165 A	120 A		
max 200 µs (fluorescent lamps)	800 A	-		
Contact material W (W (pre-make cont.)+AgSnO2 AgSnO2			
Mechanical endurance DC	> 5x10 ⁶ cycles	> 10x10 ⁶ cycles		
bistable	> 3x10 ⁶ cycles	> 5x10 ⁶ cycles		
tab manually operated	> 10 ³ cycles	-		

	bistable	> 3x10 ⁶ cycles	> 5x10 ⁶ cycles
	tab manually operated	> 10 ³ cycles	-
Rated from	equency of operation with / without load	6 / 60	min ⁻¹
Contact	ratings		
Type	Load		Cycles
RTS3T	3000 W. 230 VAC. DF 8.3%, 5 min ⁻¹ , inc	candescent lamp	tvp. 12x10


туре	Load	Cycles
RTS3T	3000 W, 230 VAC, DF 8,3%, 5 min ⁻¹ , incandescent lamp	typ. 12x10 ³
RT*3T	16 A, 250 VAC, capacitive load 140 μF, 7,5 min ⁻¹ , EN60669-1	$> 20 \times 10^3$
RT*3T	TV5, UL508, 40°C	25x10 ³
RTS3L	16 A, 250 VAC, 85°C	> 100x10 ³
RTS3L	1.5 hp, 240 VAC	
RTS3L	TV8, UL508, 40°C	25x10 ³
RTS3L	10/100 A / 250 VAC, simulated lamp load, acc. to IEC 61810-2	20x10 ³



Coil data	
Coil data, monostable coil	
Rated coil voltage range	5110 VDC
Coil power	typ 400 mW
Operative range	2
Coil insulation system according UL1446	class F

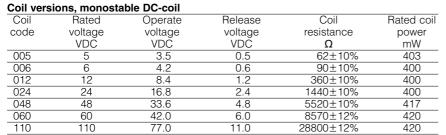

All figures are given for coil without preenergization, at ambient temperature +23°C Other coil voltages on request







Power PCB Relay RT1 Inrush Power (Continued)

Coil data, bistable coils	1 coil	2 coils
Rated coil voltage range	324 VDC	
Coil power	typ 400 mW	typ 600 mW
Operative range	2	
Limiting voltage, % of rated coil voltage	120%	150%
Minimum energization duration	30 ms	
Maximum energization duration		
Coil insulation system according UI 1446	clas	ss F

Coil versions, bistable 1 coil

Coil	Rated	Operate	Reset	Coil	Rated coil
code	voltage	voltage	voltage	resistance	power
	VDČ	VDČ	VDČ	Ω	mW
A03	3	2.1	1.7	21±10%	429
A12	12	8.4	6.6	360±10%	400
A24	24	16.8	13.2	1440±10%	400
Coil vers	sions, bistable	2 coils			
F03	3	2.1	1.7	15±10%	600
F12	12	8.4	6.6	240±10%	600
F24	24	16.8	13.2	886±10%	650
A II C'	. ,	21 201 4		1.1	0000

All figures are given for coil without preenergization, at ambient temperature +23°C Other coil voltages on request

Coils - operation

Version	1 coil 2 coils		2 coils
Coil terminals	A1	A2	A1 A3 A2
Pull-in	+	-	+ -
Reset	-	+	- +
Contact position not defined at delivery			


Insulation


caiation		
Dielectric strength coil-contact circuit	5000 V _{rms}	
open contact circuit	1250 V _{rms}	
Clearance / creepage coil-contact circuit	≥ 10 / 10 mm	
Material group of insulation parts	Illa	
Tracking index of relay base	PTI 250 V	
Insulation to IEC 60664-1		
Type of insulation coil-contact circuit	reinforced	

open contact circuit micro disconnection
Rated insulation voltage 250 V
Pollution degree 3 2
Rated voltage system 250 V
Overvoltage category III

Other data		RT.3T	RTS3L	
RoHS - Directive 2002/95/E0	C	compliant		
Ambient temperature range	monostable	-40+70°C	-40+85°C	
	bistable: 1 coil	-10+70°C	-10+85°C	
	bistable: 2 coils	-40+70°C	-40+85°C	
Vibration resistance (function	n) monostable	10 g	20 g	
Shock resistance (destruction	on)	100 g		
Category of protection		RTII - flux proof		
Mounting		pcb or on socket*)		
Mounting distance		0 mm		
Resistance to soldering hear	t	270 °C / 10 s		
Relay weight with / without to	est tab	16 / 14 g	- / 14 g	
Packaging unit with / withou		100 / 500 pcs	- / 500 pcs	
*) RTT3T or bistable 2 coil version, pcb mounting only; see Accessories				

Accessories RTS3. For details see datasheet Accessories Power Relay RT







Terminal assignment

Bottom view on solder pins

monostable version



bistable version



- a) Indicated contact position during or after coil energization with reset voltage.
- b) for 2 coil version only

S0163-BF


change.




Power PCB Relay RT1 Inrush Power (Continued)

Dimensions / PCB layout

version without test tab








b) for 2 coil version only


3


version with test tab



S0491-B







RIT

Product key

Type Version

S without test tab

T with test tab (manual operator) for contact material 'T' and bistable coil only

Contact configuration

3 1 NO contact

Contact material

L AgSnO₂ T Tungsten (W) pre-make + AgSnO₂

Coi

Coil code: please refer to coil versions table

change.





Power PCB Relay RT1 Inrush Power (Continued)

Product key	Version	Contacts	Cont. material	Coil	Coil	Part number
RTS3L005	without	1 NO contact	AgSnO ₂	monostable	5 VDC	1-1415898-8
RTS3L012	test tab			coil	12 VDC	1-1415898-9
RTS3L018					18 VDC	2-1415898-0
RTS3L024					24 VDC	1-1415898-4
RTS3L048					48 VDC	2-1415898-1
RTS3L060					60 VDC	2-1415898-2
RTS3LA12				bistable	12 VDC	2-1415898-3
RTS3LA24				1-coil	24 VDC	2-1415898-4
RTS3LF12				bistable	12 VDC	2-1415898-5
RTS3LF24				2-coils	24 VDC	2-1415898-6
RTS3T012			W pre-make +	monostable	12 VDC	0-1415898-0
RTS3T024			AgSnO ₂	coil	24 VDC	0-1415898-1
RTS3TA12				bistable	12 VDC	0-1415898-2
RTS3TA24				1-coil	24 VDC	0-1415898-3
RTS3TF03				bistable	3 VDC	0-1415898-4
RTS3TF12				2-coils	12 VDC	0-1415898-5
RTS3TF24					24 VDC	0-1415898-6
RTT3TA12	with			bistable	12 VDC	0-1415898-7
RTT3TA24	test tab			1-coil	24 VDC	0-1415898-8
RTT3TF12				bistable	12 VDC	0-1415898-9
RTT3TF24				2-coils	24 VDC	1-1415898-0

'Schrack' section.