NOTES:

I. MATERIALS AND FINISHES:

BODY, BARREL, FERRULE - BRASS, NICKEL PLATING CONTACT - BRASS, GOLD PLATING

INSULATORS – PTÉE, NATURAL SPRING - BeCu, NICKEL PLATING

GASKET - RUBBÉR, RED

2. ELECTRICAL:

A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC - 12 GHz

C. VSWR(RETURN LOSS): 20 dB MIN @ DC - 6 GHz 15 dB MIN @ 6 - 12 GHz

D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.

A. DURABILITY: 500 CYCLES MIN.

B. TEMPERATURE RANGE: -30°C TO +85°C

4. CRIMPED FERRULE HEX. CRIMP SIZE .324"


5. CRIMPED CONTACT PIN HEX. CRIMP SIZE .068" 6> SHOWS CABLE ENTRY DIMENSIONS


7. PACKAGING:

A. QUANTITY: SINGLE PACK


B. MARKING: PACKAGING TO BE MARKED "AMPHENOL RF, 31-70552-12G, AND DATE CODE" THIRD ANGLE PROJ. 🕀 🖯

REVISIONS DESCRIPTION APPR REV DATE ECN Α RELEASE TO MFG. 09442 24-Sep-18 SV

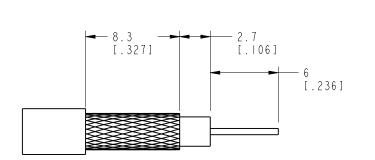

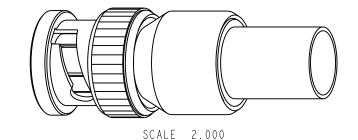

RECOMMENDED CABLE STRIPPING DIMENSIONS

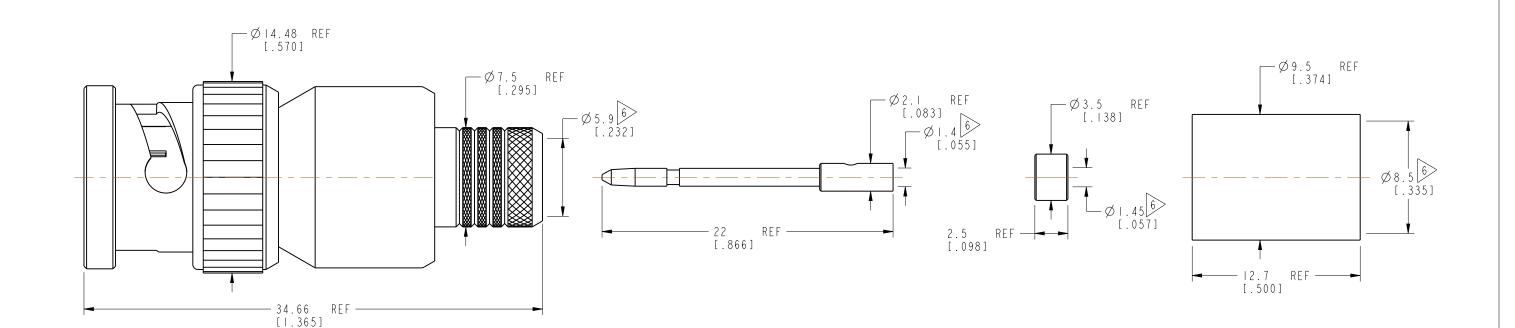

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

- 1		
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:	Ī
	<pre><0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES</pre>	ı
	\pm 0.05mm \pm 0.1mm \pm 0.2mm \pm 0.3mm \pm 1	ı
	NOTICE - These drawings, specifications, or other data (I) are, and remain the	
	property of Amphenol corp. (2) must be returned upon request; and (3) are	Ī
	confidential and not to be disclosed to any person other than those to whom they	ı
	are given by Amphenol Corp. the furnishing of these drawings, specifications, or	ı
	other data by Amphenol Corp., or to any other person to anyone for any purpose is	ı
	not to be regarded by implication or otherwise in any manner licensing, granting	L
	rights to permitting such holder or any other person to manufacture, use or sell	ı
	any product, process or design, patented or otherwise, that may in any way be	H
	related to or disclosed by said drawings, specifications, or other data.	ı

MATERIAL	DRAWN	DATE
SEE NOTES	S.VO	02-Jul-18
	ENGINEER	DATE
REFERENCE	S. VO	02-Jul-18
EAR# 8258	APPROVED	DATE
REF:		
CONFIGURATION LEVEL: In Work	CAD FILE	
FINISH		

	TITLE			
	BNC CRIMP	PLUG -	-75 OHM	
	(CANARE L	-5.5Cl	JHD	
	CABLE)			_ _
	SCALE: 3.5:1.0	SHEET 2 0	F 2	۲,
	DWG SIZE		REV	╚
В			Α	F

1A	mphenol Kt
W	ww.amphenolrf.com
DRAWING NO.	31-70552-12G
ITEM NO.	31-70552-12G
PART NO.	31-70552-I2G