
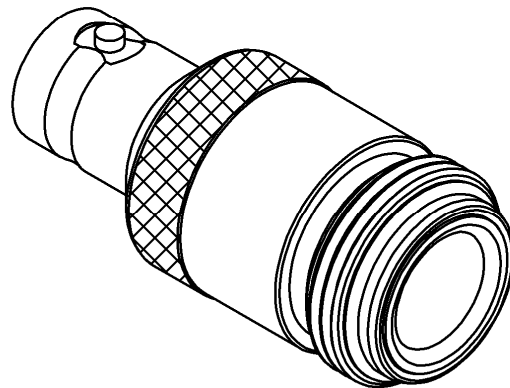



BNC 75 HDTV FEMALE-N FEMALE


STRAIGHT ADAPTER

R192.418.010

Série : ADAPTER 75

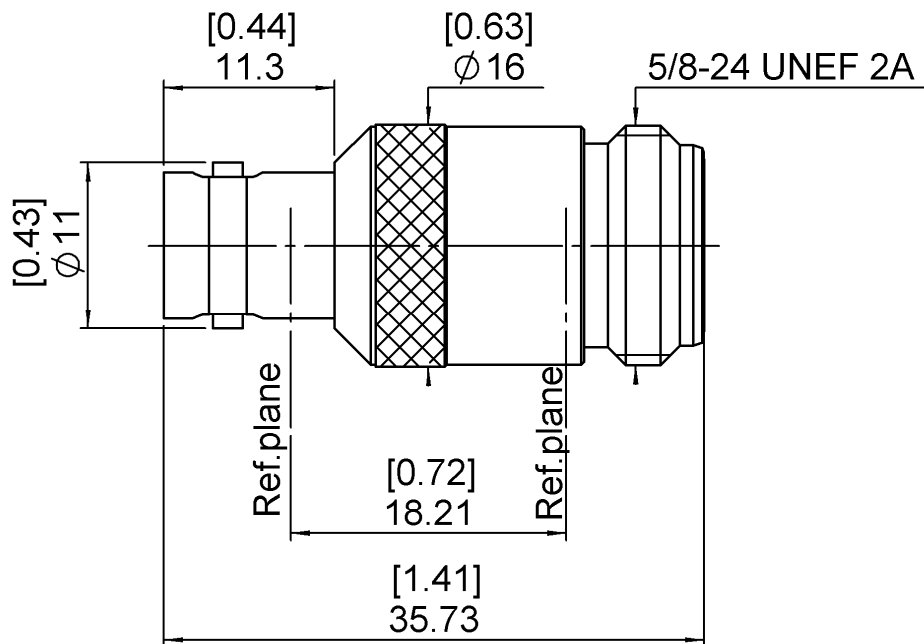

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	BBR2
CENTER CONTACT	BERYLLIUM COPPER	NPGR
OUTER CONTACT	BRASS	BBR2
INSULATOR	PTFE	
GASKET		
OTHERS PARTS		
-	-	-
-	-	-

Issue : 1007 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIAL 

BNC 75 HDTV FEMALE-N FEMALE**R192.418.010****STRAIGHT ADAPTER**

Série : ADAPTER 75

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	75	Ω
Frequency	0-6	GHz
VSWR	1.03 + 0,0200	x F(GHz) Maxi
Insertion loss	0.1	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (55*	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating	-65/+165	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	15 N mini
Axial force – Opposite end	15 N mini
Torque	NA N.cm mini

Recommended torque

Mating	BNC 75 HDTV	0 N.cm
	N	0 N.cm
		0 N.cm
Panel nut		NA N.cm

Mating life	500	Cycles mini
Weight	30,7000	g

OTHER CHARACTERISTICS

*From 2 to 3 GHz

Issue : 1007 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

