


LOC	DIST	REVISIONS			
H	-	LTR	DESCRIPTION	DATE	APVD
		--	--	--	--
		A	EH-1838-99	22-Dec-99	TvdM
		O	EH-0290-99	09-Feb-99	MN

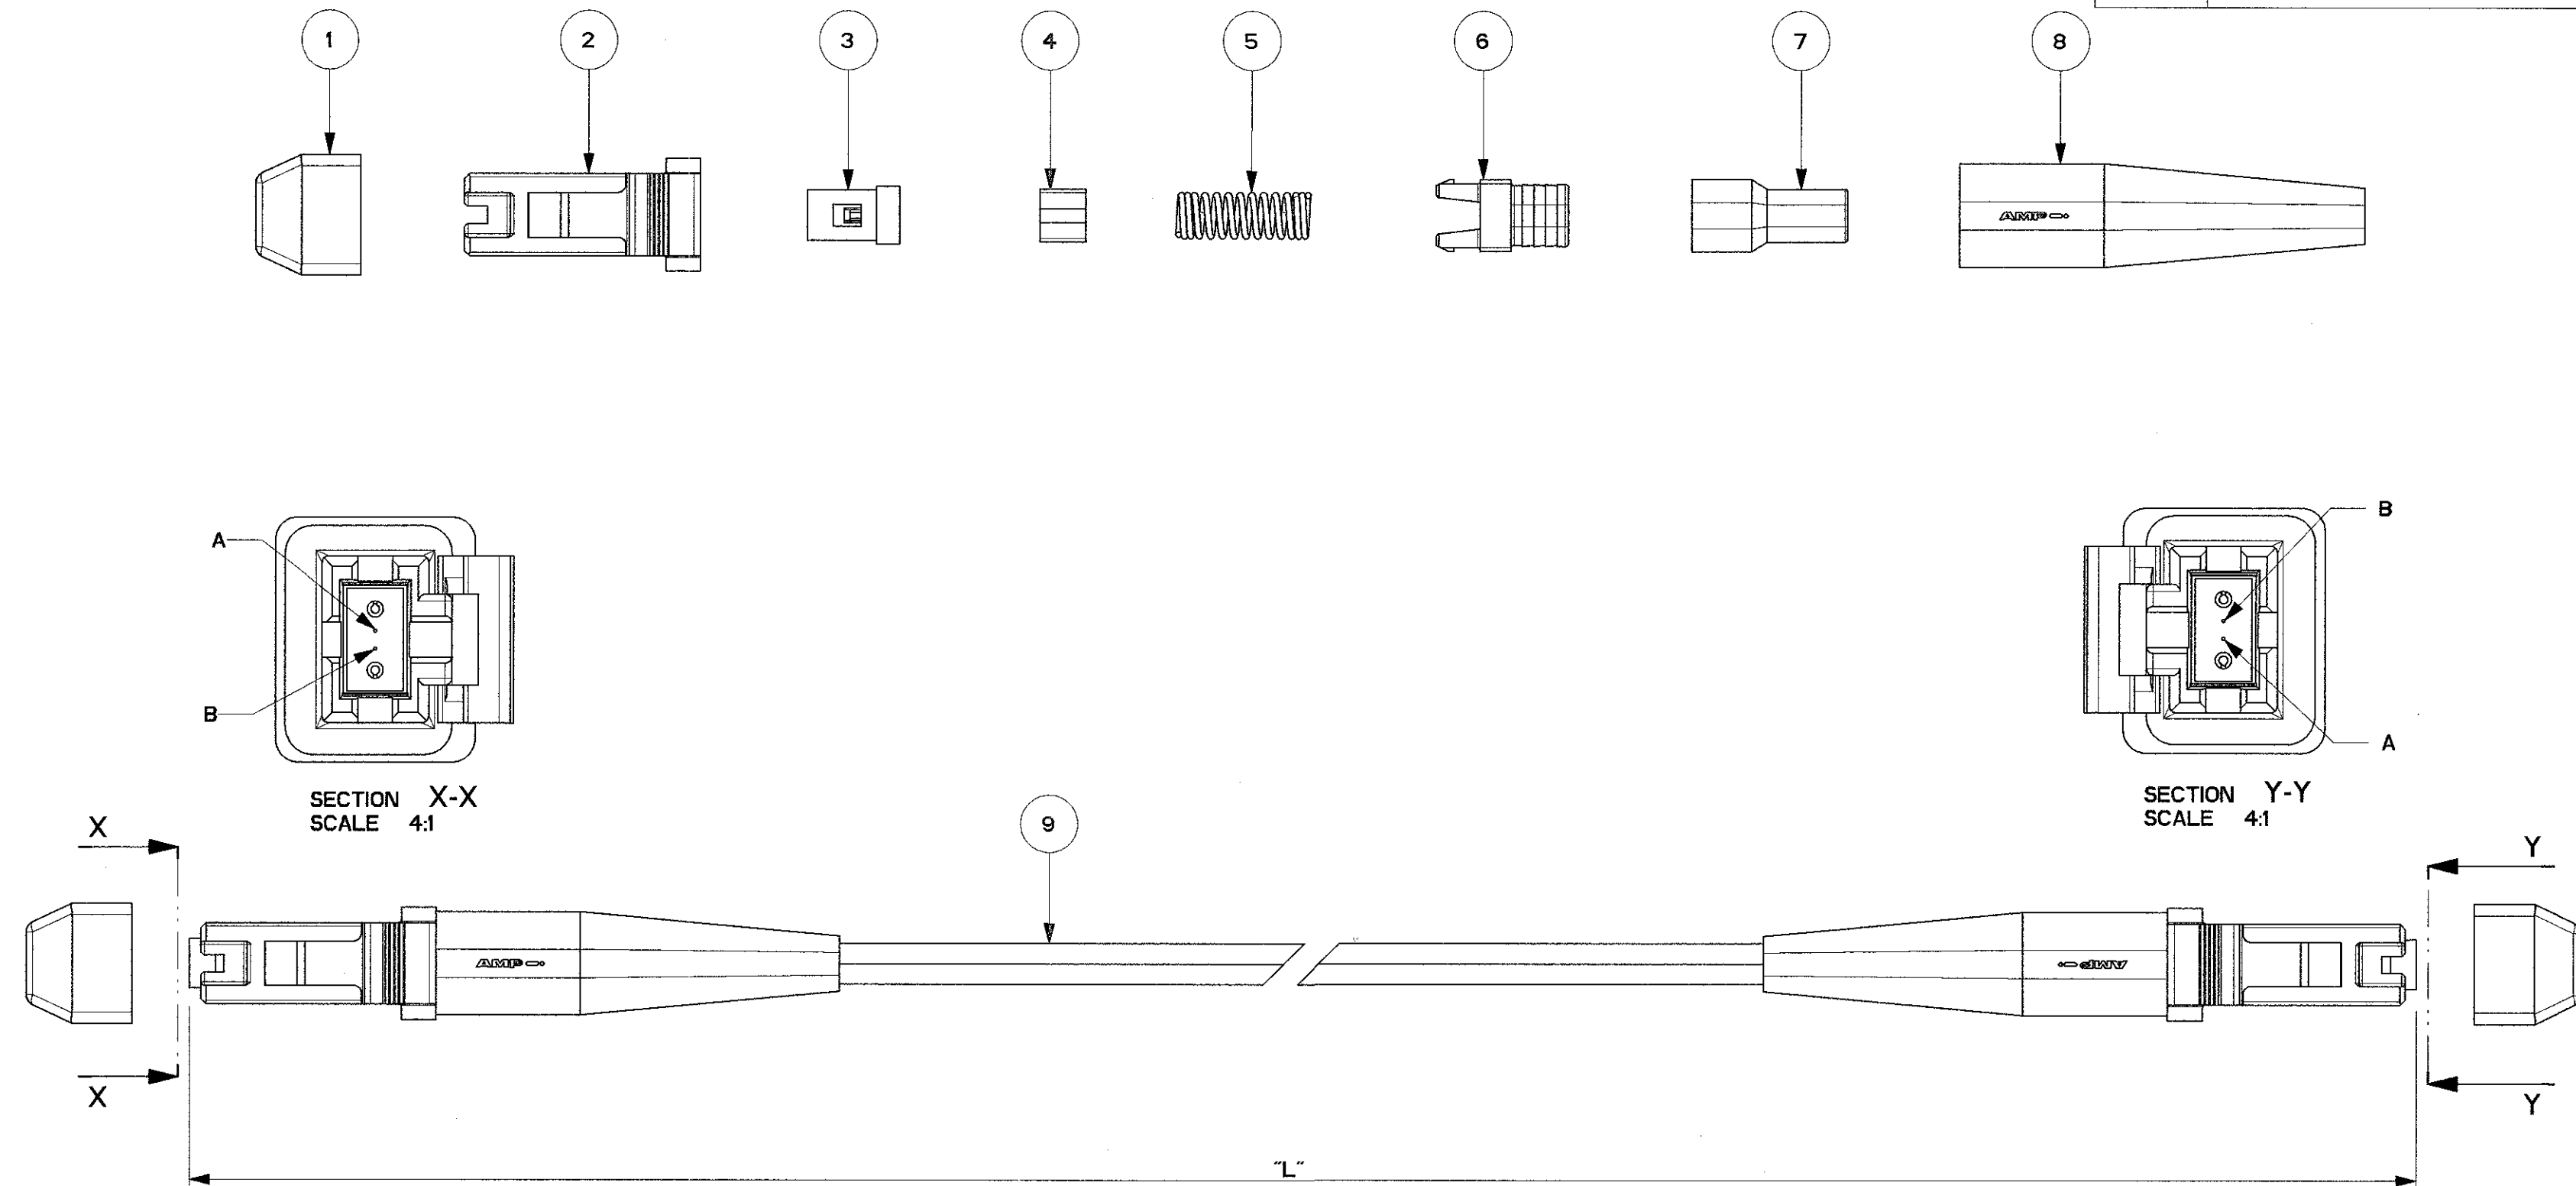

PART NUMBER	"L"(METER)
0-1206617-1	1,0 -0/+0,1
0-1206617-2	2,0 -0/+0,1
0-1206617-3	3,0 -0/+0,1
0-1206617-4	4,0 -0/+0,1
0-1206617-5	5,0 -0/+0,1
0-1206617-6	6,0 -0/+0,1
0-1206617-7	7,0 -0/+0,1
0-1206617-8	8,0 -0/+0,1
0-1206617-9	9,0 -0/+0,1
1-1206617-0	10,0 -0/+0,1
1-1206617-1	11,0 -0/+0,2
1-1206617-2	12,0 -0/+0,2
1-1206617-3	13,0 -0/+0,2
1-1206617-4	14,0 -0/+0,2
1-1206617-5	15,0 -0/+0,2
1-1206617-6	16,0 -0/+0,2
1-1206617-7	17,0 -0/+0,2
1-1206617-8	18,0 -0/+0,2
1-1206617-9	19,0 -0/+0,2
2-1206617-0	20,0 -0/+0,2
5-1206617-0	50,0 -0/+0,5
9-1206617-8	7,5 -0/+0,1
9-1206617-9	0,5 -0/+0,05

NOTES:  
 1. ATTENUATION  $\leq 0,5\text{dB}$ , MEASURED AT 1300nm  
 ACC. IEC 61300-3-4 EQUILIBRIUM MODE CONDITION  
 2. TEST RESULT SHEET SUPPLIED WITH EACH  
 INDIVIDUALLY PACKED ASSEMBLY  
 3. CROSS OVER AS PER TABLE :

LEFT CONN.	RIGHT CONN.
B	A
A	B

L	Part Number	Description	Item
L	-	CABLE 50/125 MINI ZIP 1,8mm, ORANGE	9
2	-	STRAIN RELIEF MT-RJ, BLACK	8
2	-	CRIMP EYELET MT-RJ	7
2	-	SPRING PUSH, MINI ZIP	6
2	-	SPRING	5
2	-	PIN KEEPER	4
2	-	MINI-MT FERRULE, MULTIMODE	3
2	-	MT-RJ HOUSING	2
2	-	DUST COVER	1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP HOLLAND B.V. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN AMIDDELDORP CHR T.v.de MEULEN APVD T.v.de Meulen	AMP Holland B.V. 's-Hertogenbosch, The Netherlands
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± 0,2° FINISH	NAME <b>FOCA MT-RJ LEAD ASSY</b> 50/125 MINI ZIP 1,8mm, MM	SIZE A2
MATERIAL	WEIGHT	CAGE CODE 00779	DRAWING NO 1206617
		SCALE 2:1	SHEET 1 OF 1 REV A