
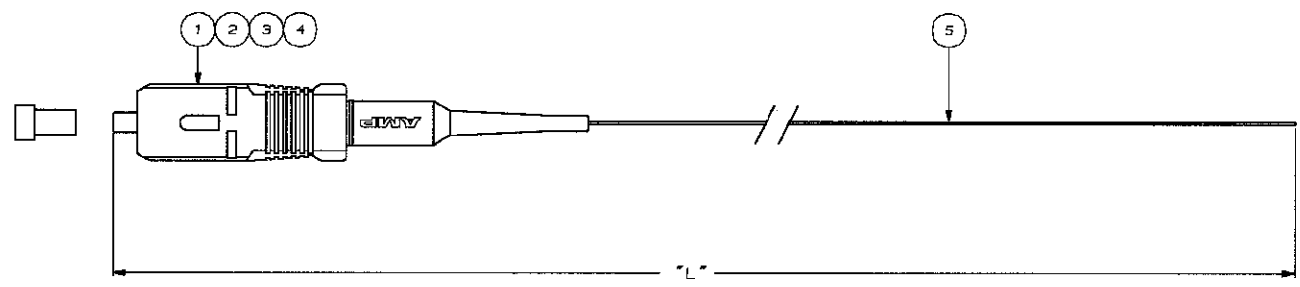


DO NOT SCALE  
DIMENSIONS IN mm

METRIC



NOTES:

- 1. ATTENUATION  $\leq 0,3$  dB, MEASURED AT 1300 nm ACC. IEC 874-1 CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
- 2. ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER INDIVIDUALLY PACKED ASSEMBLY
- 3. CABLE INFO:
  - FIBRE CORE: 62,5  $\mu$ m
  - BUFFER MATERIAL: LOW SMOKE ZERO HALOGEN
  - BUFFER COLOUR: BLUE
  - OUTER DIAMETER: 900  $\mu$ m

PART NUMBER	"L" ( METER )
0-0349584-1	0,5 -0/+0,1
0-0349584-2	1,0 -0/+0,2
0-0349584-3	1,5 -0/+0,2
0-0349584-4	2,0 -0/+0,2
0-0349584-5	2,5 -0/+0,2
0-0349584-6	3,0 -0/+0,2
0-0349584-7	3,5 -0/+0,2
0-0349584-8	4,0 -0/+0,2
0-0349584-9	4,5 -0/+0,2
1-0349584-0	5,0 -0/+0,2

L	QTY	DESCRIPTION	ITEM		
1	-	FD BUFFERED FIBRE DES 62,5/125/900, BLUE	5		
1	-	SC BUFFER BODY, BLACK	4		
1	-	SC CERAMIC, OVMOLDED	3		
1	-	SC HOUSING, BEIGE	2		
1	-	FERRULE DUST CAP, BLACK	1		
PART NUMBER		DESCRIPTION	ITEM		
EH-0491-98	1	CUSTOMER DRAWING FOR REFERENCE ONLY NOT TO BE UPDATED	1		
<small>© COPYRIGHT 19- BY AMP-HOLLAND B.V.          ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.          THIS DRAWING IS UNPUBLISHED          RELEASED FOR PUBLICATION</small>					
AMP		AMP-HOLLAND B.V. Stier-Cogenbosch, The Netherlands.			
EH-0491-98		FOCA SC CERAMIC PIGTAIL 62,5/125/900 DRY EASY STRIP FIBRE			
LTR.	REVISION RECORD	DR.	CHK.	DATE	
DR.	N.M.J.B./S	CHK.	N.M.J.B./S	APP.	N.M.J.B./S
DATE:	03 APR 99	DATE:	03 APR 99	DATE:	03 APR 99
DWS. No.		REV. LTR.		SHEET	
C-349584		B		1 of 1 A2	