


DO NOT SCALE
DIMENSIONS IN mm

METRIC

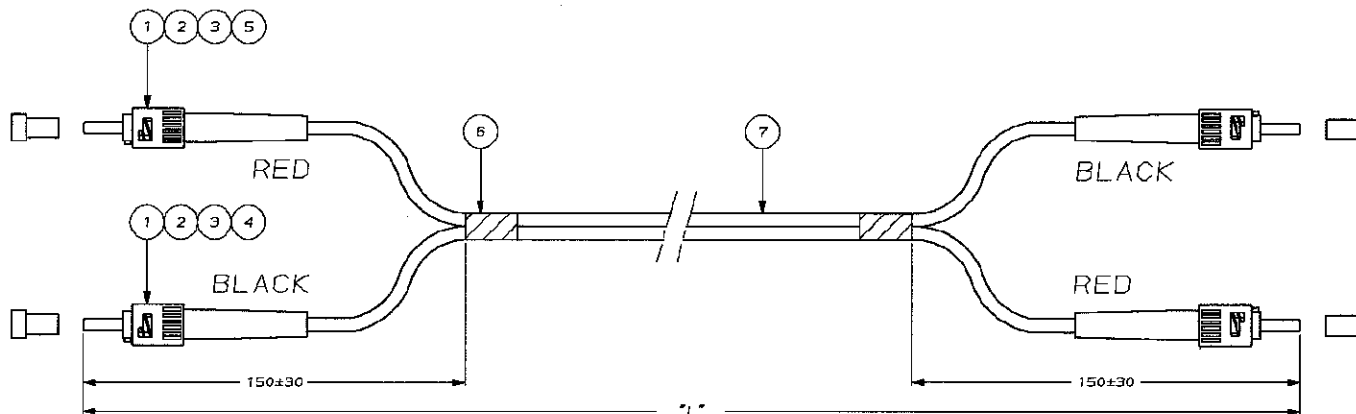

NOTES:

- ATTENUATION $\leq 0,3$ dB, MEASURED AT 1300 nm ACC. IEC 874-1
CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
- ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER INDIVIDUALLY PACKED ASSEMBLY
- CABLE INFO:
 - FIBRE CORE: 62,5 μ m
 - JACKET MATERIAL: LOW SMOKE ZERO HALOGEN
 - JACKET COLOUR: ORANGE
 - OUTER DIAMETER: 2,5 X 5,0 mm

PART NUMBER	"L" (METER)
0-0349574-1	1,0 -0/+0,2
0-0349574-2	2,0 -0/+0,2
0-0349574-3	3,0 -0/+0,2
0-0349574-4	4,0 -0/+0,2
0-0349574-5	5,0 -0/+0,2
0-0349574-6	6,0 -0/+0,2
0-0349574-7	7,0 -0/+0,2
0-0349574-8	8,0 -0/+0,2
0-0349574-9	9,0 -0/+0,2
1-0349574-0	10,0 -0/+0,2

L	-	F0 CABLE 62,5/125 DES TWIN ZIP 2,5mm	7
2	-	WRAP AROUND LABEL, DAT-85	6
2	-	ST BOOT, RED	5
2	-	ST BOOT, BLACK	4
4	-	ST CRIMP EYELET	3
4	-	ST CERAMIC, OVERMOLDED	2
4	-	FERRULE DUST CAP, BLACK	1
PART NUMBER		DESCRIPTION	ITEM
QTY	-	-	-
CUSTOMER DRAWING FOR REFERENCE ONLY			
© COPYRIGHT 19- BY AMP-HOLLAND B.V.			
ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE			
COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.			
THIS DRAWING IS UNPUBLISHED			
RELEASED FOR PUBLICATION			
AMP-HOLLAND B.V.			
Herengracht 100, 3721 CA Utrecht, The Netherlands.			
B EH-0491-98		FOCA ST CERAMIC DUPLEX	
L.T.R. REVISION RECORD		DR. CHK. DATE	
DR. : H.B. 01/01/98	CHK. : H.B. 01/01/98	DS : H.B. 01/01/98	DRG. No. : C-349574
DATE : 03 APR 98	DATE : 03 APR 98	DATE : 03 APR 98	REV. L.T.R. SHEET : B 1 of 1 A2