


Material: Copper

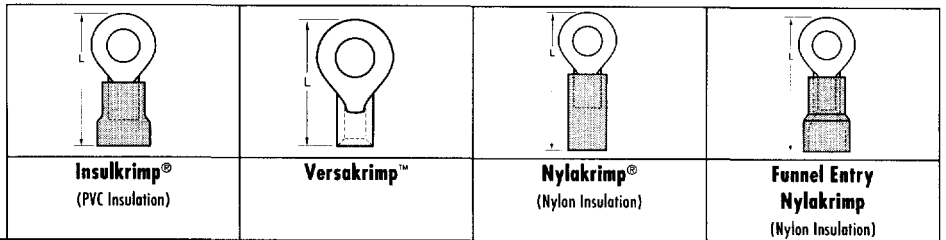

Wire Range AWG	Stud Size S	Maximum Width W	Minimum Clearance C	Insulkrimp® (PVC Insulation)		Versakrimp™		Nylakrimp® (Nylon Insulation)		Funnel Entry Nylakrimp (Nylon Insulation)	
				Order No.	Maximum Length L	Order No.	Maximum Length L	Order No.	Maximum Length L	Order No.	Maximum Length L
2	10 (-)	16.40 (.645)	17.90 (.703)	G-675-10X	53.20 (2.093)	G-375-10	40.20 (1.583)		52.80 (2.078)	G-975-10	55.50 (2.186)
	1/4 (6)	22.30 (.879)	17.90 (.703)	G-674-14X	56.10 (2.210)	G-374-14	43.20 (1.700)	G-774-14	55.80 (2.195)	G-974-14	58.50 (2.303)
		16.40 (.645)	17.90 (.703)	G-675-14X	53.20 (2.093)	G-375-14	40.20 (1.583)	G-775-14	52.80 (2.078)	G-975-14	55.50 (2.186)
	5/16 (8)	22.30 (.879)	17.90 (.703)		56.10 (2.210)	G-374-56	43.20 (1.700)		55.80 (2.195)	G-974-56	58.50 (2.303)
		16.40 (.645)	17.90 (.703)	G-675-56X	53.20 (2.093)	G-375-56	40.20 (1.583)	G-775-56	52.80 (2.078)	G-975-56	55.50 (2.186)
	3/8 (9)	22.30 (.879)	17.90 (.703)		56.10 (2.210)	G-374-38	43.20 (1.700)		55.80 (2.195)	G-974-38	58.50 (2.303)
		16.40 (.645)	17.90 (.703)	G-675-38X	53.20 (2.093)	G-375-38	40.20 (1.583)	G-775-38	52.80 (2.078)	G-975-38	55.50 (2.186)
	7/16 (11)	22.30 (.879)	17.90 (.703)		56.10 (2.210)	G-374-76	43.20 (1.700)		55.80 (2.195)	G-974-76	58.50 (2.303)
	1/2 (12)	22.30 (.879)	17.90 (.703)	G-674-12X	56.10 (2.210)	G-374-12	43.20 (1.700)	G-774-12	55.80 (2.195)	G-974-12	58.50 (2.303)
		22.30 (.879)	17.90 (.703)	G-674-58X	56.10 (2.210)	G-374-58	43.20 (1.700)	G-774-58	55.80 (2.195)	G-974-58	58.50 (2.303)
5/8 (16)	32.30 (1.270)	25.10 (.990)		68.40 (2.693)	G-377-58	55.40 (2.183)		68.00 (2.678)	G-977-58	70.80 (2.786)	
	32.30 (1.270)	25.10 (.990)		68.40 (2.693)	G-377-34	55.40 (2.183)	G-377-34	68.00 (2.678)	G-977-34	70.80 (2.786)	
1/0	1/4 (6)	21.30 (.840)	19.10 (.750)	H-681-14X	66.80 (2.630)	H-381-14	48.80 (1.920)	H-781-14	64.60 (2.544)		66.80 (2.628)
	5/16 (8)	21.30 (.840)	19.10 (.750)	H-681-56X	66.80 (2.630)	H-381-56	48.80 (1.920)	H-781-56	64.60 (2.544)	H-981-56	66.80 (2.628)
		21.30 (.840)	19.10 (.750)	H-681-38X	66.80 (2.630)	H-381-38	48.80 (1.920)	H-781-38	64.60 (2.544)		66.80 (2.628)
	3/8 (9)	22.90 (.902)	19.10 (.750)		67.60 (2.661)	H-380-38	49.60 (1.951)	H-780-38	65.40 (2.575)	H-980-38	67.50 (2.659)
		32.40 (1.277)	32.60 (1.282)	H-682-38X	85.90 (3.381)		67.80 (2.671)		83.70 (3.295)	H-982-38	85.80 (3.379)
	7/16 (11)	22.90 (.902)	19.10 (.750)	H-680-76X	67.60 (2.661)	H-380-76	49.60 (1.951)	H-780-76	65.40 (2.575)	H-980-76	67.50 (2.659)
	1/2 (12)	22.90 (.902)	19.10 (.750)		67.60 (2.661)	H-380-12	49.60 (1.951)	H-780-12	65.40 (2.575)		67.50 (2.659)
		32.40 (1.277)	32.60 (1.282)	H-682-12X	85.90 (3.381)		67.80 (2.671)	H-782-12	65.40 (2.575)	H-982-12	67.50 (2.659)
	5/8 (16)	32.40 (1.277)	32.60 (1.282)	H-682-58X	85.90 (3.381)		67.80 (2.671)		83.70 (3.295)	H-982-58	85.80 (3.379)
	3/4 (18)	32.40 (1.277)	32.60 (1.282)	H-682-34X	85.90 (3.381)	H-382-34	67.80 (2.671)		83.70 (3.295)	H-982-34	85.80 (3.379)
2/0	1/4 (6)	24.10 (.948)	19.60 (.770)	J-685-14X	67.40 (2.654)	J-385-14	51.30 (2.019)	J-785-14	67.40 (2.654)	J-985-14	69.30 (2.727)
	5/16 (8)	24.10 (.948)	19.60 (.770)	J-685-56X	67.40 (2.654)	J-385-56	51.30 (2.019)	J-785-56	67.40 (2.654)	J-985-56	69.30 (2.727)
		24.10 (.948)	19.60 (.770)	J-685-38X	67.40 (2.654)	J-385-38	51.30 (2.019)	J-785-38	67.40 (2.654)	J-985-38	69.30 (2.727)
	3/8 (9)	24.10 (.948)	19.60 (.770)		67.40 (2.654)	J-385-76	51.30 (2.019)	J-785-76	67.40 (2.654)	J-985-76	69.30 (2.727)
		24.10 (.948)	19.60 (.770)	J-685-76X	67.40 (2.654)	J-385-12	51.30 (2.019)		67.40 (2.654)	J-985-12	69.30 (2.727)
	7/16 (11)	24.10 (.948)	19.60 (.770)		67.40 (2.654)	J-387-12	68.20 (2.687)	J-787-12	84.40 (3.322)	J-987-12	86.20 (3.395)
	1/2 (12)	24.10 (.948)	19.60 (.770)	J-687-12X	84.40 (3.322)	J-387-58	68.20 (2.687)	J-787-58	84.40 (3.322)	J-987-58	86.20 (3.395)
		32.40 (1.275)	32.40 (1.275)	J-687-58X	84.40 (3.322)	J-387-34	68.20 (2.687)	J-787-34	84.40 (3.322)	J-987-34	86.20 (3.395)
	5/8 (16)	32.40 (1.275)	32.40 (1.275)	J-687-34X	84.40 (3.322)						
	3/4 (18)	32.40 (1.275)	32.40 (1.275)								
3/0	5/16 (8)	27.10 (1.067)	20.40 (.805)		76.90 (3.029)	K-390-56	54.70 (2.154)		74.40 (2.929)	K-990-56	76.40 (3.008)
	3/8 (9)	27.10 (1.067)	20.40 (.805)		76.90 (3.029)	K-390-38	54.70 (2.154)	K-790-38	74.40 (2.929)	K-990-38	76.40 (3.008)
		27.10 (1.067)	20.40 (.805)		76.90 (3.029)		54.70 (2.154)	K-790-76	74.40 (2.929)	K-990-76	76.40 (3.008)
	7/16 (11)	27.10 (1.067)	20.40 (.805)		76.90 (3.029)		54.70 (2.154)	K-790-12	74.40 (2.929)	K-990-12	76.40 (3.008)
	1/2 (12)	27.10 (1.067)	20.40 (.805)	K-690-12X	76.90 (3.029)	K-390-12	54.70 (2.154)	K-790-12	74.40 (2.929)	K-990-12	76.40 (3.008)
	5/8 (16)	27.10 (1.067)	20.40 (.805)	K-690-58X	76.90 (3.029)	K-390-58	54.70 (2.154)	K-790-58	74.40 (2.929)	K-990-58	76.40 (3.008)
3/4 (18)	32.00 (1.260)	32.40 (1.274)	K-692-34X	91.30 (3.594)		69.00 (2.719)	K-792-34	88.70 (3.494)	K-992-34	90.80 (3.573)	
4/0	3/8 (9)	28.80 (1.135)	21.10 (.830)			L-395-38	52.30 (2.215)		75.70 (2.980)	L-995-38	78.00 (3.069)
		28.80 (1.135)	21.10 (.830)				52.30 (2.215)	L-795-76	75.70 (2.980)	L-995-76	78.00 (3.069)
	7/16 (11)	28.80 (1.135)	21.10 (.830)				52.30 (2.215)	L-795-12	75.70 (2.980)	L-995-12	78.00 (3.069)
		28.80 (1.135)	21.10 (.830)			L-395-12	52.30 (2.215)	L-795-12	75.70 (2.980)	L-995-12	78.00 (3.069)
	1/2 (12)	28.80 (1.135)	21.10 (.830)			L-395-58	52.30 (2.215)	L-795-58	75.70 (2.980)	L-995-58	78.00 (3.069)
		28.80 (1.135)	21.10 (.830)				69.50 (2.738)		89.00 (3.503)	L-998-58	91.20 (3.592)
5/8 (16)	40.30 (1.260)	33.00 (1.300)				69.50 (2.738)		89.00 (3.503)	L-998-34	91.20 (3.592)	
3/4 (18)	40.30 (1.260)	33.00 (1.300)				69.50 (2.738)		89.00 (3.503)		91.20 (3.592)	

Product Specifications

Wire Range AWG	Barrel Length	Material Thickness	Insulation Color	Maximum Wire Insulation Diameter				Inside Barrel Diameter	Circular Mil Area
				Insulkrimp	Aviakrimp®	Nylakrimp "7" Barrel	Nylakrimp "9" Barrel		
24-26	3.70 (.145)	0.40 (.020)	Yellow		1.90 (.075)				254-642
18-22	4.40 (.175)	0.80 (.032)	Red	3.70 (.145)	3.60 (.140)				509-2600
14-16	4.40 (.175)	0.80 (.032)	Blue	4.40 (.175)	4.30 (.170)				2050-5180
14-16 Heavy Duty	6.40 (.250)	1.27 (.050)	Yellow	6.40 (.250)	5.70 (.225)				2050-9030
	6.40 (.250)	1.00 (.040)	Yellow						3260-8230
10-12	6.40 (.250)	1.00 (.040)	Yellow	6.40 (.250)	5.70 (.225)				5180-13,100
8	8.40 (.330)	1.30 (.050)	Red		6.70 (.265)	6.70 (.265)	8.80 (.346)	4.50 (.176) min.	13,100-20,800
6	9.80 (.385)	1.40 (.057)	Blue		11.20 (.440)	8.80 (.345)	10.80 (.424)	6.00 (.235) min.	20,800-33,100
4	11.40 (.447)	1.90 (.075)	Yellow		13.10 (.515)	10.90 (.430)	12.80 (.506)	7.20 (.285) min.	33,100-52,600
2	13.10 (.515)	1.90 (.075)	Red		16.50 (.650)	12.90 (.510)	15.20 (.598)	9.30 (.367) min.	52,600-83,700
1/0	17.70 (.700)	1.90 (.075)	Blue		17.50 (.690)	15.00 (.592)	17.20 (.678)	10.90 (.430) min.	83,700-119,500
2/0	18.40 (.725)	2.10 (.083)	Yellow		18.40 (.725)	17.10 (.672)	19.40 (.762)	12.90 (.510) min.	119,500-150,500
3/0	19.40 (.765)	2.30 (.091)	Red		22.10 (.870)	18.60 (.733)	22.00 (.867)	13.80 (.545) min.	150,500-190,000
4/0	19.40 (.765)	2.60 (.102)	Blue			21.00 (.833)	23.80 (.936)	15.90 (.625) min.	190,000-231,000

Industrial Products

