
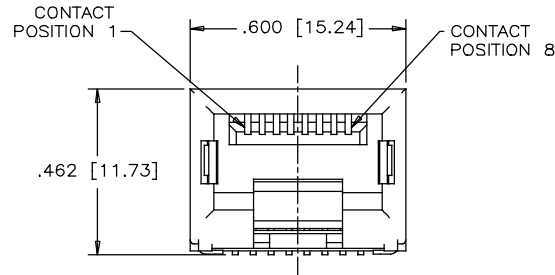
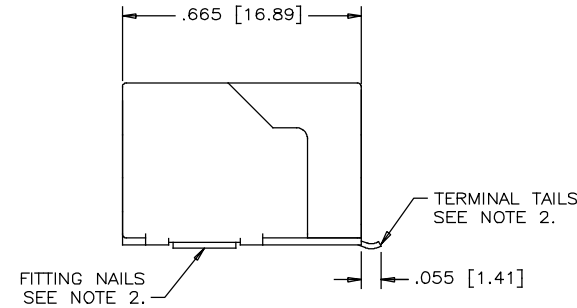
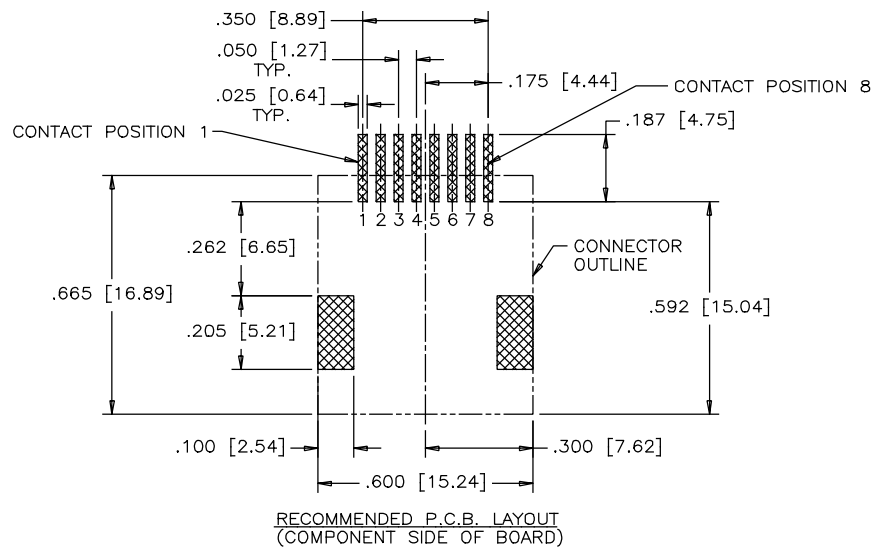


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL DRAWING	JUL 20/05	L.CHAN
B	ADD NEW OPTION FOR WHITE HOUSING	AUG 01/17	L.CHAN
C	ADD NEW OPTION FOR GREEN HOUSING	OCT 22/18	L.CHAN

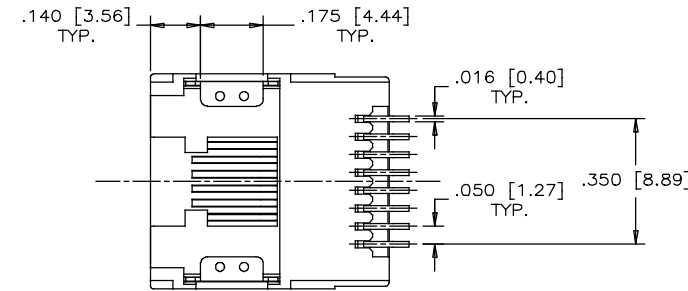

NOTES:

1. MATERIALS:

HOUSING: HIGH TEMPERATURE RESISTANT NYLON.
FLAMMABILITY RATING UL 94V-0
COLOUR: SEE AMPHENOL PART NUMBER SYSTEM FOR HOUSING OPTIONS

CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING: SEE AMPHENOL PART NUMBER SYSTEM FOR PLATING OPTIONS.
50 MICRO" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100 MICRO" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

2. COPLANARITY SPECIFICATION:

WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .004 [0.10].

AMPHENOL PART NO.: R J L S E - 4 X 0 X X - 0 1 X

GOLD PLATING
0 = GOLD FLASH
1 = 15 MICRO" GOLD PLATING
2 = 30 MICRO" GOLD PLATING
3 = 50 MICRO" GOLD PLATING

NUMBER OF CONTACTS
2 = 2 CONTACTS 4 & 5
4 = 4 CONTACTS 3 TO 6
6 = 6 CONTACTS 2 TO 7
8 = 8 CONTACTS 1 TO 8

PACKAGING
BLANK = TRAY
T = TAPE AND REEL

HOUSING OPTION
0 = WHITE HOUSING
1 = BLACK HOUSING
2 = YELLOW HOUSING
3 = RED HOUSING
8 = GREEN HOUSING

UNLESS SPECIFIED OTHERWISE		DRAWN	PWANG	JUL20/05	Amphenol Canada Corp.	
PRIMARY UNITS	INCHES	CHECKED	TERRY	JUL20/05	Commercial Products	
SECONDARY	MILLIMETERS	M.E. APP'D			SURFACE MOUNT MODULAR JACK, 8 POSITION, CONTACT OPTIONS, WITHOUT SHIELD, WITH GOLD PLATING AND PACKAGING OPTIONS - RoHS COMPLIANT	
REFERENCE IN PARENTHESES		Q.A. APP'D				
GENERAL TOLERANCES		DWG APP'D				
1 DECIMAL PLACE		±.025				
2 DECIMAL PLACES		±.020				
3 DECIMAL PLACES		±.015				
ANGULAR DEGREES		±1°				
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING				
REF. EAR # 12798		DWG NO.			P-RJLSE-4X0XX-01X	
CODE ID NO. 03554		DWG SIZE X			SCALE N/A	
SHEET 1 OF 1		REV			C	