

MCX COAXIAL CONNECTORS

All connector bodies, unless otherwise noted, are machined brass, 3µ" gold plated.

All insulators are Teflon.

All center contacts are 30µ" gold plated.


All dimensions are in millimeters and [inches].

C A B L E G R O U P L E G E N D					
01	58/ 58A/ 58C/ 141/ 303/ LMR195™/ B7806A	06A	179/ U DOUBLE BRAIDED	09	B8227/ 89207
01A	55/ 142/ 223/ 400	07	8/ 8A/ 213/ 393	10	.141 SEMI-RIGID/ 402/U
01B	LMR200™/ B7807A	07A	214	11	.085 SEMI-RIGID/ 405/U
02	58 PLENUM/THINNET/ 122U/ B88240/ B89907	07B	8X/ LMR240™/ B7808A	12	.250 SEMI-RIGID
03	59/ 62/ 140/ 210	07C	B9913/ LMR400™/ B7810A/ B8214	13	.047 SEMI-RIGID/ B1674A
03A	59/ U-20AWG	07D	B89913	14	178/ 196
04	59/ U PLENUM	07E	11	15	B8281/ B9231/ B9141
04A	59/ U PLENUM-20AWG	07F	11/ U-14AWG/ B8213/ B9292/ B7731/ B1859A	15A	B88281
05	174/ 188A/ 316/ B7805A	08	6/ 143/ 212	16	180/ 195/ 122/ B8218/ B1865A/ B1855
05A	316/ U DOUBLE BRAIDED	08A	B1694A/ B9248	17	LMR600™
06	179/ 187/ B9221	08B	6 PLENUM/ B1695A	18	AT&T734A/ B1505A
				19	AT&T735A/ B735A1

CRIMP ATTACHMENTS FOR FLEXIBLE AND SEMI-RIGID CABLE


STRAIGHT CRIMP PLUG — FLEXIBLE CABLE

P.N.	Cable Group	Finish	Insulation	Impedance	Crimp Tool
252101	05	Nickel	Teflon	50	B
252103	05	Gold	Teflon	50	B
252120	05A	Nickel	Teflon	50	C
252121	05A	Gold	Teflon	50	C
252101-75	06	Nickel	Teflon	75	B
252103-75	06	Gold	Teflon	75	B
252120-75	06A	Nickel	Teflon	75	C
252121-75	06A	Gold	Teflon	75	C
252126	14	Nickel	Teflon	50	B
252127	14	Gold	Teflon	50	B

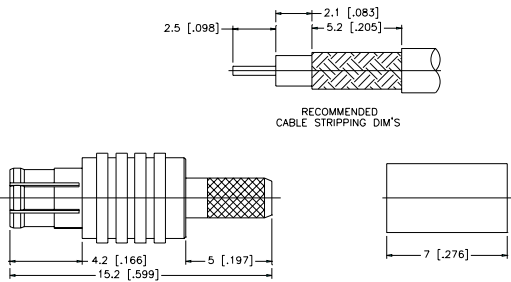

STRAIGHT SOLDER PLUG — SEMI-RIGID CABLE

P.N.	Cable Group	Finish	Insulation	Impedance	Crimp Tool
252110	10	Nickel	Teflon	50	N/A
252111	10	Gold	Teflon	50	N/A
252106	11	Nickel	Teflon	50	N/A
252107	11	Gold	Teflon	50	N/A
252156	13	Gold	Teflon	50	N/A

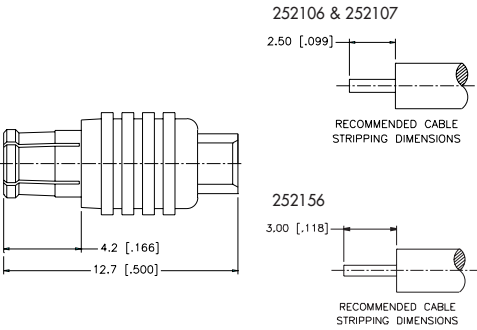

MCX COAXIAL CONNECTORS