
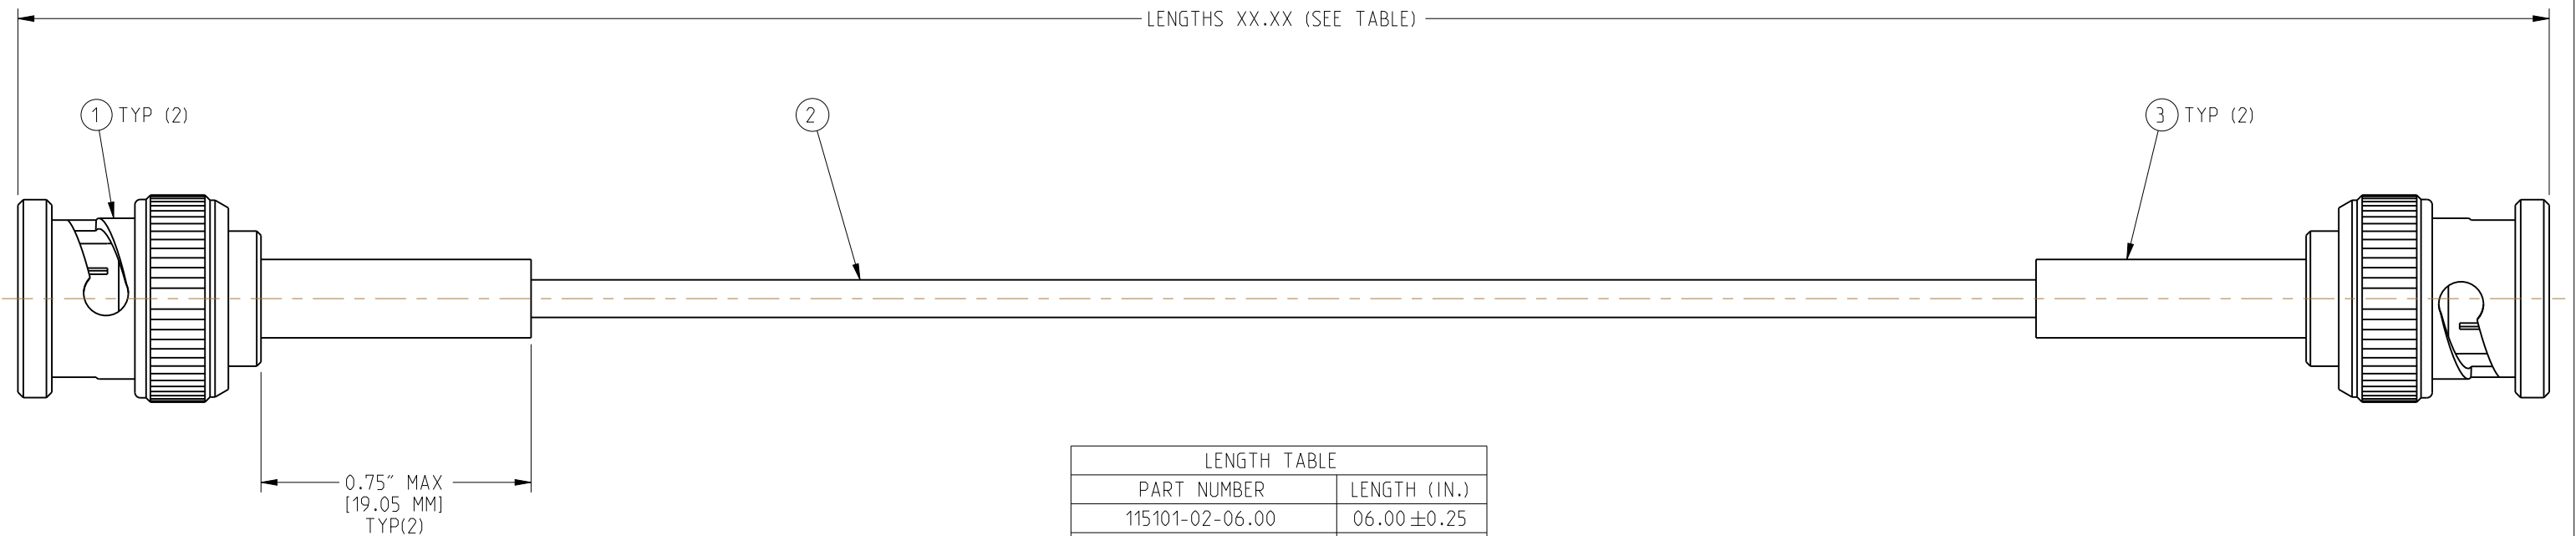


NOTES:

1. PACKAGE CABLE ASSEMBLIES IN BAG. LABEL BAG WITH AMPHENOL 115101-02-XX.XX AND DATE CODE.
2. CABLE ASSEMBLY TO BE 100% TESTED FOR HI-POT, CONTINUITY, SHORTS AND OPEN.

| | | | | | | |
|---|-----|-----------------|-----------|-----|------|--|
| 175101-29-XX.XX | | REVISIONS | | | | |
| DRAWING NO. | REV | DESCRIPTION | DATE | ECO | APPR | |
| THIRD ANGLE PROJ.  | A | RELEASE TO MFG. | 16-Apr-13 | -- | MB | |

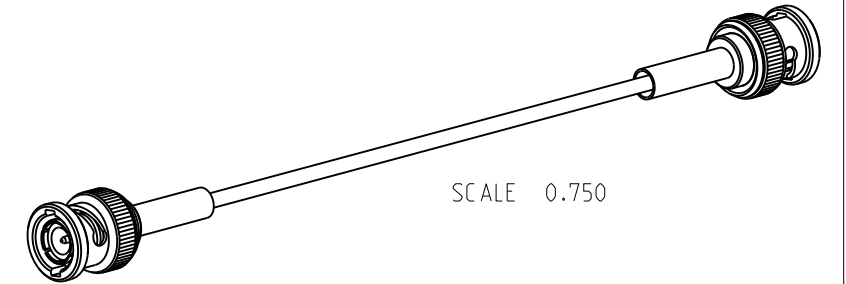

| LENGTH TABLE | |
|-----------------|------------------|
| PART NUMBER | LENGTH (IN.) |
| 115101-02-06.00 | 06.00 \pm 0.25 |
| 115101-02-12.00 | 12.00 \pm 0.25 |
| 115101-02-18.00 | 18.00 \pm 0.25 |
| 115101-02-24.00 | 24.00 \pm 0.50 |
| 115101-02-36.00 | 36.00 \pm 0.50 |
| 115101-02-48.00 | 48.00 \pm 0.50 |

* ADDITIONAL LENGTHS CAN BE PROVIDED
BY CHANGING XX.XX TO DESIRED LENGTH IN INCHES
CONTACT CONNEX MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

- | | |
|--|---|
| <input type="checkbox"/> FREQUENCY: --- TO --- GHz | <input checked="" type="checkbox"/> CONTINUITY |
| <input type="checkbox"/> VSWR _____ : 1 MAX | <input checked="" type="checkbox"/> HI-POT : 500 VRMS |
| <input type="checkbox"/> INS. LOSS _____ dB MAX | <input type="checkbox"/> OTHER |

| | | | | |
|-------------|-----|------|-----------------------|--------|
| 009-954-341 | A/R | 3 | HEAT SHRINK TUBE | BLACK |
| 009-881-159 | A/R | 2 | RG 174 CO-AXIAL CABLE | |
| 112132 | 2 | 1 | BNC CRIMP PLUG | |
| PART NUMBER | QTY | ITEM | DESCRIPTION | FINISH |

| | | | | | | | | | |
|--|-----------|---------------------|-------------------|--|--|---------------|--------------------------------|--|-----|
| <div>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°</div> <div>NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.</div> | MATERIAL | DRAWN MOHAN B | DATE 16-Apr-13 | TITLE BNC CRIMP PLUG TO BNC CRIMP PLUG, USING RG 174 CO-AXIAL CABLE, VARIOUS LENGTHS | | | Amphenol Connex | | |
| | REFERENCE | ENGINEER MOHAN B | DATE 16-Apr-13 | | | | | | |
| | | | APPROVED | | | | DATE | | |
| | | | CAD FILE | | | DWG SIZE B | DRAWING NO. 115101-02-XX-XX | | REV |