


# Series M1330



## Surface Mount Inductors

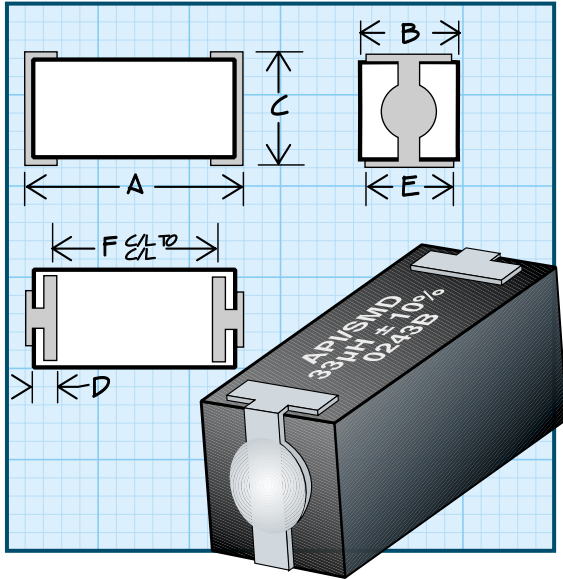

**Not recommended for new designs** See Series 1330 (page 26) for replacement.

### Military QPL Approvals

M83446/23 Phenolic Core

M83446/24 Iron Core

M83446/25 Ferrite Core

### Physical Parameters

	Inches	Millimeters
A	0.300 to 0.320	7.62 to 8.13
B	0.105 to 0.125	2.67 to 3.18
C	0.125 to 0.145	3.18 to 3.68
D	0.020 to 0.040	0.51 to 1.02
E	0.075 to 0.095	1.91 to 2.41
F	0.230 to 0.260	5.84 to 6.60

Dimensions "A" and "C" are over terminals

**Weight Max.** (Grams) 0.30

### Operating Temperature Range

Phenolic: -55°C to +125°C

Iron and Ferrite: -55°C to +105°C

### Current Rating at 90°C Ambient

Phenolic: 35°C Rise

Ferrite: 15°C Rise

### Maximum Power Dissipation at 90°C Ambient

Phenolic: 0.210 W

Iron: 0.090 W

Ferrite: 0.073 W

**Packaging** Tape & reel (16mm): 7" reel, 500 pieces max.; 13" reel, 2200 pieces max.

**Made In the U.S.A. Patent Protected**

DASH NUMBER*	MIL DASH #	INDUCTANCE (μH) ±10%	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAX. (mA)
<b>M83446/23- SERIES M1330 PHENOLIC CORE</b>							
-94K	01F	0.10	40	25.0	680.0	0.08	1380
-96K	02F	0.12	40	25.0	640.0	0.09	1300
-00K	03F	0.15	38	25.0	600.0	0.10	1230
-02K	04F	0.18	35	25.0	550.0	0.12	1120
-04K	05F	0.22	33	25.0	510.0	0.14	1040
-06K	06F	0.27	33	25.0	430.0	0.16	975
-08K	07F	0.33	30	25.0	410.0	0.22	830
-10K	08F	0.39	30	25.0	365.0	0.30	710
-12K	09F	0.47	30	25.0	330.0	0.35	660
-14K	10F	0.56	30	25.0	300.0	0.50	550
-16K	11F	0.68	28	25.0	275.0	0.60	500
-18K	12F	0.82	28	25.0	250.0	0.85	420
-20K	13F	1.00	25	25.0	230.0	1.00	390
<b>M83446/24- SERIES M1330 IRON CORE</b>							
-22K	01F	1.20	25	7.9	150.0	0.18	620
-24K	02F	1.50	28	7.9	140.0	0.22	560
-26K	03F	1.80	30	7.9	125.0	0.30	480
-28K	04F	2.20	30	7.9	115.0	0.40	415
-30K	05F	2.70	37	7.9	100.0	0.55	355
-32K	06F	3.30	45	7.9	90.0	0.85	285
-34K	07F	3.90	45	7.9	80.0	1.00	263
-36K	08F	4.70	45	7.9	75.0	1.20	239
-38K	09F	5.60	50	7.9	65.0	1.80	195
-40K	10F	6.80	50	7.9	60.0	2.00	185
-42K	11F	8.20	55	7.9	55.0	2.70	160
-44K	12F	10.00	55	7.9	50.0	3.30	144
-46K	13F	12.0	45	2.5	40.0	2.70	160
-48K	14F	15.0	45	2.5	35.0	2.80	157
-50K	15F	18.0	45	2.5	30.0	3.10	149
-52K	16F	22.0	45	2.5	25.0	3.30	144
-54K	17F	27.0	45	2.5	20.0	3.50	140
<b>M83446/25- SERIES M1330 FERRITE CORE</b>							
-56K	01F	33.0	35	2.5	24.0	3.40	130
-58K	02F	39.0	35	2.5	22.0	3.60	125
-60K	03F	47.0	35	2.5	20.0	4.50	110
-62K	04F	56.0	35	2.5	18.0	5.70	100
-64K	05F	68.0	35	2.5	15.0	6.70	92
-66K	06F	82.0	35	2.5	14.0	7.30	88
-68K	07F	100.0	35	2.5	13.0	8.00	84
-70K	08F	120.0	30	0.79	12.0	13.00	66
-72K	09F	150.0	30	0.79	11.0	15.00	61
-74K	10F	180.0	30	0.79	10.0	17.00	57
-76K	11F	220.0	30	0.79	9.0	21.00	52
-78K	12F	270.0	30	0.79	8.0	25.00	47
-80K	13F	330.0	30	0.79	7.0	28.00	45
-82K	14F	390.0	30	0.79	6.5	35.00	40
-84K	15F	470.0	30	0.79	6.0	42.00	36
-86K	16F	560.0	30	0.79	5.0	46.00	35
-88K	17F	680.0	30	0.79	4.2	60.00	30
-90K	18F	820.0	30	0.79	3.8	65.00	29
-92K	19F	1000.0	30	0.79	3.4	72.00	28
<b>Parts listed above are QPL/MIL qualified</b>							
<b>Optional Tolerances: J = 5% H = 3% G = 2% F = 1%</b>							
<b>*Complete part # must include series # PLUS the dash #</b>							
<b>For further surface finish information, refer to TECHNICAL section of this catalog.</b>							

RF INDUCTORS