

Single- and two-phase, primary switched mode power supply **PC-0224-100-2**



Picture shows PC-0224-050-0

Advantages

Stabilized and adjustable output voltage
Fast tripping of conventional circuit breakers
DC OK indicator
Parallel operation
Push-in terminals
Robust DIN rail mounting
Resistant to transient overvoltages up to 4 kV
Optional with 50 % Power Boost (PC-0224-xxx-2)
3 years warranty

Applications

The economic power supplies in the Power Compact series set new standards in their class. Above-average robustness against transients and energetic surge pulses at their input and equipped with essential additional aspects for a worldwide high plant availability. A powerful and flexible option that's still light and compact. Due to a single or two-phase supply from 180 V to 550 V, these power supplies are suitable for a highly diverse range of applications in solar, measurement and control technology and they really come into their own in industrial and building automation. The output voltage can be set easily using the rotary potentiometer on the front of the housing. The robust DIN rail fastening method and push-in connection terminals enable fast and secure mounting.

Standards

Primary switched mode power supply
to UL 60950, UL 508

Safety:
EN 61558-2-16, EN 60950-1

EMC:
EN 61204-3

Approvals




UL/CSA 60950, UL 508, GL (in preparation)



Single- and two-phase, primary switched mode power supply **PC-0224-100-2**

Type	PC-0224-100-2
Electrical data	
Special features	Power Boost
Characteristics	
Input	
Input rated voltage	200 - 500 Vac
Input voltage range	180 - 550 Vac (254 - 780 Vdc)
Input voltage derating	0.5 %/Vac < 200 Vac
Rated frequency range	44 - 66 Hz
Input rated current (rated load)	1.97 A (230 Vac)
Starting current limiter	< 30 A, NTC
Switch-on time	0,5 s (1 x 230 Vac/ 3 x 400 Vac)
Mains buffering (rated load)	20 ms (230 Vac) / 78 ms (400 Vac)
Power factor	0.52
Input fuse internal	6,3 AT
Recommended back-up fuse (circuit breaker)	6 A, 10 A, 16 A, characteristic B, C
Transient surge voltage protection	Varistor
Output	
Output rated voltage	24 Vdc
Output voltage range	23 - 28,5 Vdc
Output rated current	10 A
Power Boost	15 A / 5 s @24 Vdc >260 Vac
Output limited current	typ. 11 A
Tripping of LS circuit breakers	max. B6/ C2
Parallel connection	Yes
Serial operation	Yes
Power dissipation, no load/rated load	1,33 W / 27,77 W (230 Vac) 2 W / 20,27 W (400 Vac)
Max. power losses	27,77 W (230 Vac / 24 V / 10 A)
Efficiency	typ. 90% (230V) / 92,5% (400V)
Ripple factor	typ. 22 mVss
Resistance to reverse feed max.	35 Vdc
Over-voltage-protection	typ. 40 Vdc
Signaling	
Status indicator	LED green
Signal output	Relay contact
Approvals	
Approvals	cURus, cULus (prepared), GL (prepared)
Environment	
Type of cooling	natural convection
Ambient temperature	-13 °F to +158 °F
Storage temperature	-13 °F to +185 °F
Derating	-2.5 %/K > +131 °F
Required minimum spacing (left/right)	0.00 inch
Required minimum spacing (over/under)	1.97 inch
Safety and protection	
Protection index	IP 20
Safety class	I, with PE connection
Order numbers	
Order Number	PC-0224-100-2

Type	PC-0224-100-2
Mechanical data	
Environment	
Mounting position	horizontal for standard rail DIN TS35
Terminal and mounting	
Terminals signalling (direct plug-in technology Push-in)	max 2,5 mm ²
Terminals input (direct plug-in technology Push-in)	max 2,5 mm ²
Terminals output (direct plug-in technology Push-in)	max 2,5 mm ²
Measures and weights	
Weight	1.76 lbs
Dimensions in inch	

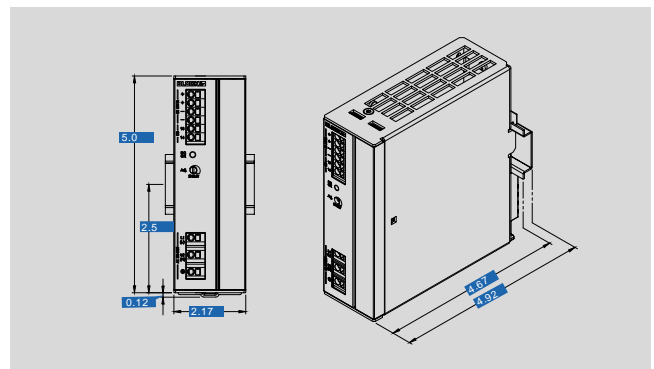

Subject to change.