

FERRITE CORE DIMENSIONS:


A	9.96 [.392]	±	0.15 [.006]
B	4.88 [.192]	±	0.13 [.005]
C	20.50 [.807]	±	0.25 [.010]
D	4.14 [.163]	±	0.13 [.005]

**UNCONTROLLED
DOCUMENT**

RoHS

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	75 Ω	170 Ω	320 Ω
Minimum	- Ω	136 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)


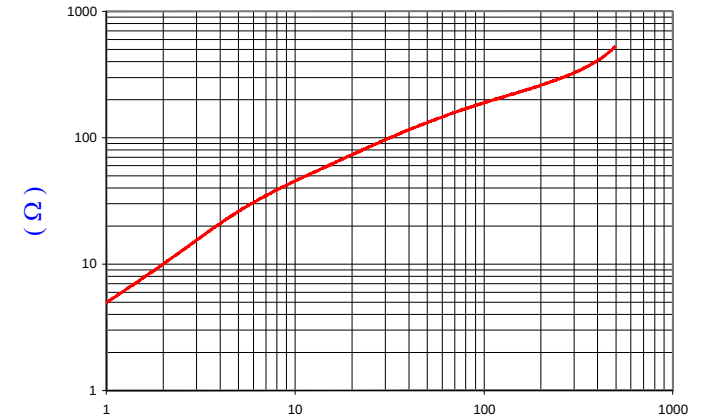


FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture REF 3219

NOTES:

1. ASSEMBLED PART #: 28A0392-0A2
2. CASE COLOR: BLACK
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon
5. COSMETIC SPECIFICATION REFER TO WI-QA-038.

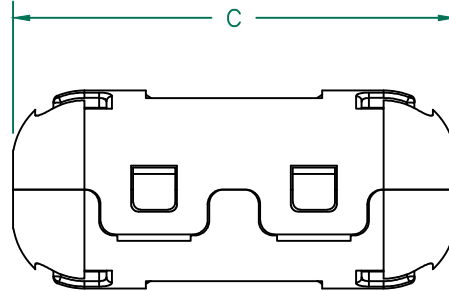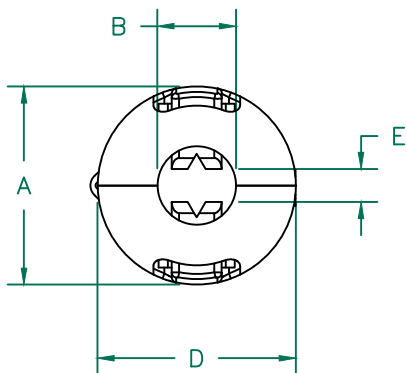

CASE DIMENSIONS:

A	13.72 [.540]	±	REF.
B	5.44 [.214]	±	REF.
C	30.56 [1.203]	±	REF.
D	13.72 [.540]	±	REF.
E	2.29 [.090]	±	REF.

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
K	UPDATE COMPANY LOGO, ADD NOTE 5	08/21/14	QIU	Laird PROJECT/PART NUMBER: 28A0392-0A2 DATE: 06/25/04 CAD # 28A0392-0A2-K			
J	UPDATED NOTE 3	09/15/10	JUN				
H	UPDATE LOGO ADD NOTES 3&4	01/26/09	JRK				
G	UPDATE 100MHz MINIMUM VALUE	06/26/07	TMB				
F	UPDATE COMPANY LOGO	04/17/07	TMB				
E	ADD DIMENSION E TO CASE CALLOUT	02/05/07	TMB	REV: K PART TYPE: FERRITE SNAP ON DRAWN BY: JRK			
D	CHANGE CASE TOLERANCES TO REF REMOVE CORE & CASE REF REVISE NOTES	07/27/06	TMB	SCALE: NTS MATERIAL: Ferrite			
C	UPDATE CORE AND CASE DESIGN REVISE NOTES	09/23/05	TMB				