



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0
2. FINISH: SELECTIVE GOLD (Au) 0.76 MICROMETERS MINIMUM IN CONTACT AREA, SELECTIVE MATTE TIN (Sn) ON PCB TAILS, NICKEL (Ni) OVERALL.
3. REFER TO MOLEX PRODUCT SPECIFICATION PS-75221-999 FOR PERFORMANCE SPECIFICATIONS.
4. REFER TO MOLEX DOCUMENT SD-75361-001 FOR ADDITIONAL DETAIL ON THE GBX 5 PAIR SIGNAL WAFER.
5. REFER TO MOLEX DOCUMENT SD-75367-001 FOR ADDITIONAL DETAIL ON THE GBX 5 PAIR GUIDANCE MODULE AND 5 PAIR ESD GROUND MODULE.
6. REFER TO MOLEX DOCUMENT SD-75292-002 FOR ADDITIONAL DETAIL ON THE GBX 5 PAIR POWER MODULE.
7. PARTS ARE PACKAGED IN TRAYS PER PK-70873-6001. PACKAGE MOUNTING SCREWS IN BAG(S), AND PLACE IN END POCKET(S), IN TRAY.
8. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPEC PS-45499-002.
9. MARK LABEL WITH PART NUMBER AND DATE CODE. LABEL MAY BE REPLACED BY LASER MARKINGS ON THE STIFFENER.

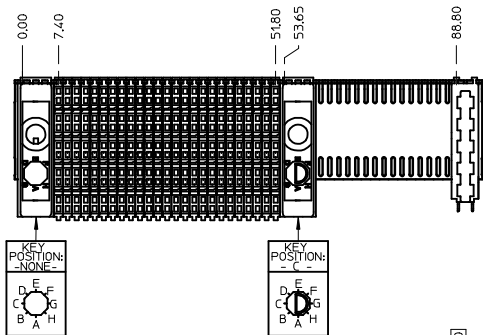

ITEM	PART NUMBER	DESCRIPTION	QTY
1	75366-0095	STIFFENER	1
2	75361-0031	SIGNAL WAFER - GBX 5 PAIR, LF	25
3	75367-0015	GUIDE MODULE	1
4	73726-0000	GUIDE/GROUND MODULE MNTG SCREW	2
5	75292-5060	POWER MODULE, LF	1
6	75367-5413	ESD GROUND MODULE KEY - 'C'	1

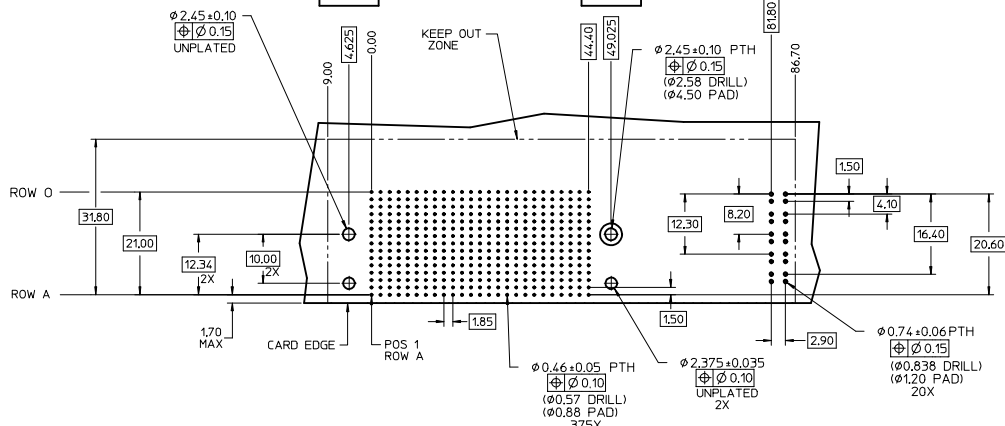

LEAD-FREE  
PLATING

CUSTOMER: MIRANDA

DAUGHTERCARD HOLE PATTERN  
(CONNECTOR SIDE)

CHANGE PACKAGING EC NO: UCP2014-0096 DRAWN BY: DRWNRHPPLE CHKD BY: CHYKDMORGAN APPROV. BY: SMILLER DATE: 2013/08/02 REV: 2013/09/27	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	▽=0 ▽=0 ▽=0	mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±0.13 ±--- 1 PLACE ±0.25 ±--- 0 PLACE ±--- ±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	ANGULAR ±1/2°	MATERIAL NO. 75360-0030	DATE VARVARA 05/09/12 CHECKED BY KMULVEY 05/09/12 APPROVED BY SMILLER 2012/08/09
MATERIAL NO. 75360-0030		DOCUMENT NO. SD-75360-030		SHEET NO. 1 OF 1		