


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5055671470](#)
Status: **Active**
Overview: [Micro-Lock Plus Wire-to-Board Connector System](#)
Description: 1.25mm Pitch, Micro-Lock Plus PCB Header, Right-Angle, Surface Mount, Tin-Bismuth Plating, Positive Lock, 14 Circuits, Tape and Reel, Natural

Documents:

| | |
|--|---|
| 3D Model | Application Specification AS-505565-001-001 (PDF) |
| 3D Model (PDF) | Packaging Specification 5055679200-200 (PDF) |
| Drawing (PDF) | RoHS Certificate of Compliance (PDF) |
| Product Specification 5055650000-000 (PDF) | |

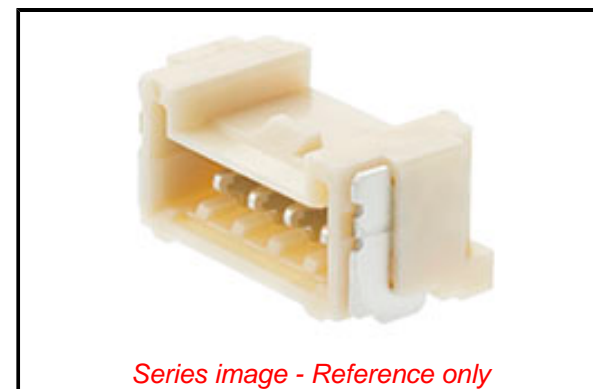

Series image - Reference only

Agency Certification

UL E29179

General

| | |
|----------------|--|
| Product Family | PCB Headers |
| Series | 505567 |
| Application | Signal, Wire-to-Board |
| Overview | Micro-Lock Plus Wire-to-Board Connector System |
| Product Name | Micro-Lock Plus |
| UPC | 889056534000 |

Physical

| | |
|--------------------------------|-----------------------|
| Breakaway | No |
| Circuits (Loaded) | 14 |
| Circuits (maximum) | 14 |
| Color - Resin | Natural |
| Durability (mating cycles max) | 30 |
| First Mate / Last Break | No |
| Glow-Wire Capable | No |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Tin-Bismuth |
| Material - Plating Termination | Tin-Bismuth |
| Material - Resin | Polyamide |
| Net Weight | 397.414/mg |
| Number of Rows | 1 |
| Orientation | Right Angle |
| PCB Locator | No |
| Packaging Type | Embossed Tape on Reel |
| Pitch - Mating Interface | 1.25mm |
| Pitch - Termination Interface | 1.25mm |
| Plating min - Mating | 1.000µm |
| Plating min - Termination | 1.000µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Robotic Placement | Vacuum Pick-Up Area |
| Stackable | No |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | Surface Mount |

Electrical

| | |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 1.5A |
| Voltage - Maximum | 50V AC (RMS)/DC |

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[505567](#) Series

Mates With

[Micro-Lock Plus Receptacle Housing](#)
[505565](#)

Material Info

Reference - Drawing Numbers

| | |
|---------------------------|-------------------|
| Application Specification | AS-505565-001-001 |
| Packaging Specification | 5055679200-200 |
| Product Specification | 5055650000-000 |
| Sales Drawing | 5055670000-SD-000 |

This document was generated on 07/17/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION