


FEMALE PLUG ULTRA LOCK U12 STRAIGHT

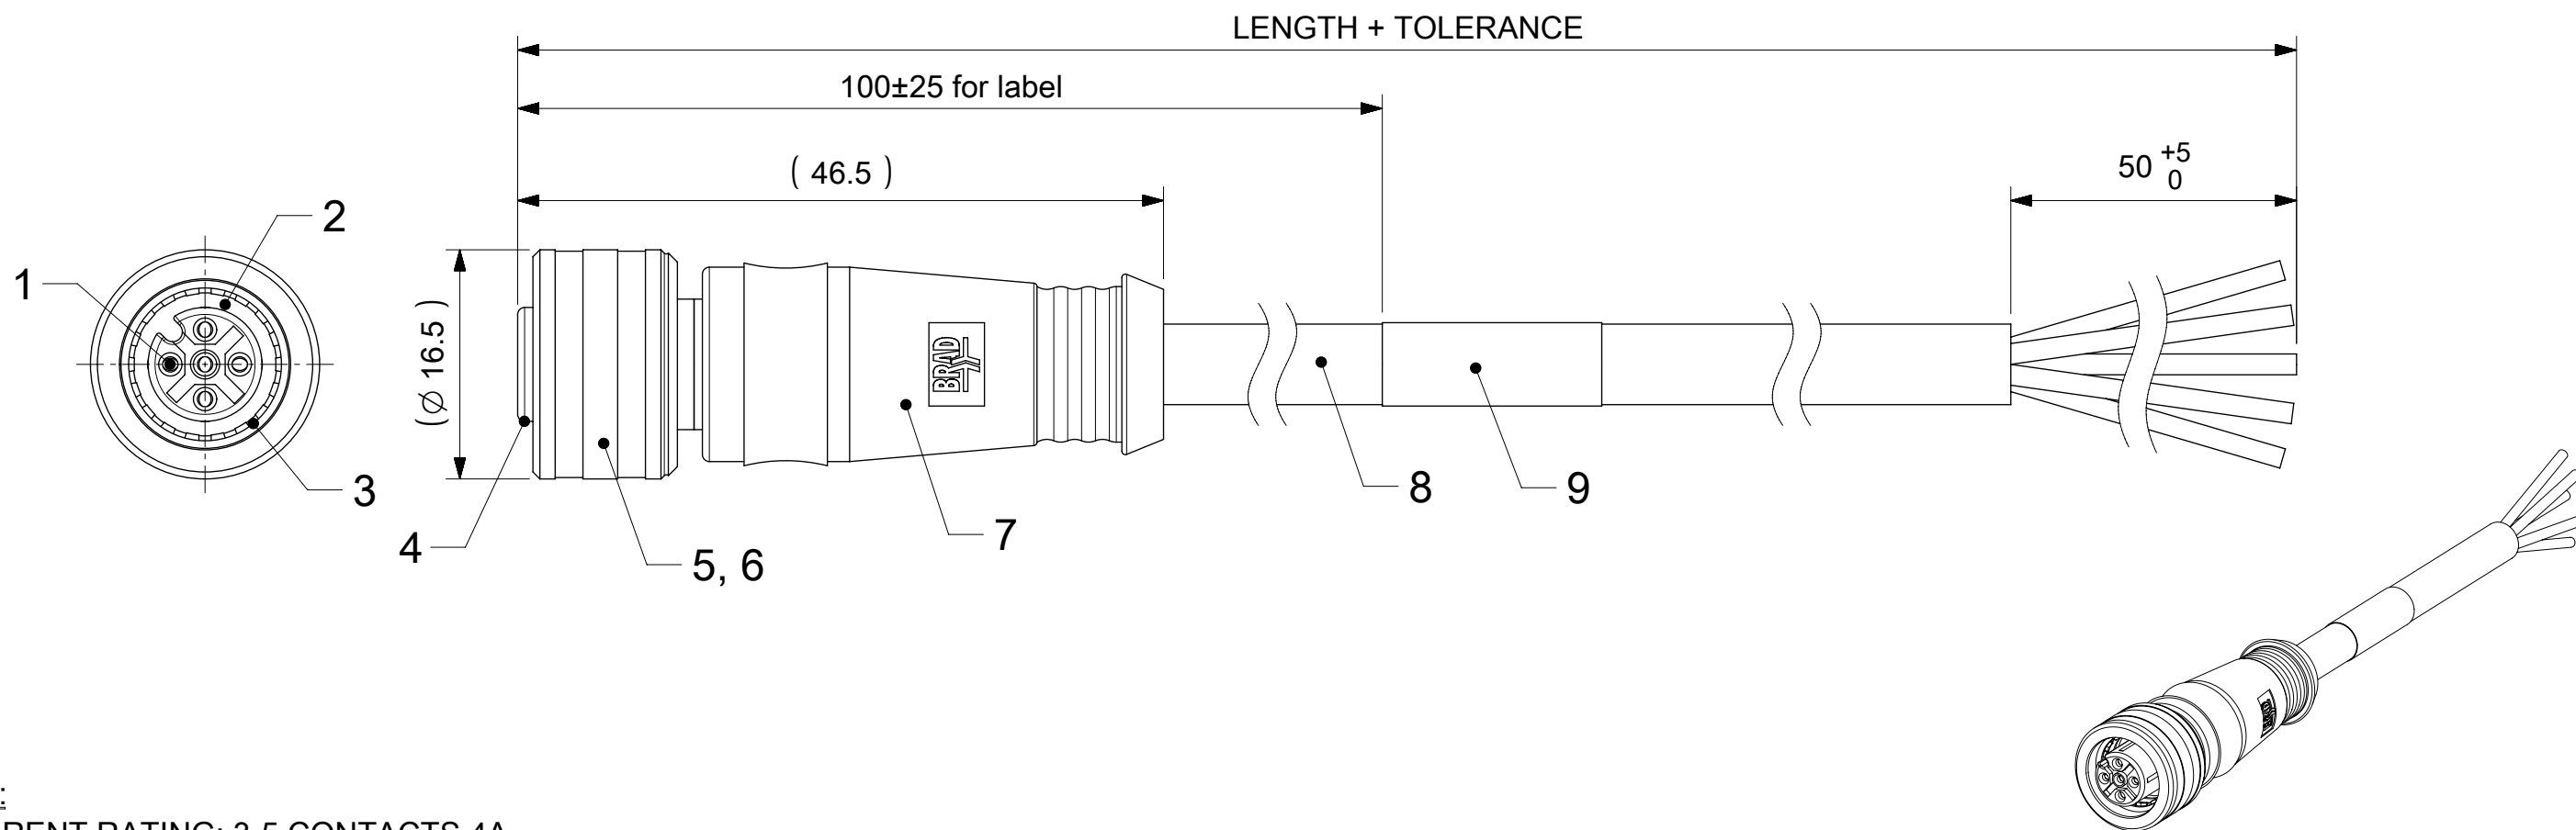

NOTES:

CURRENT RATING: 3-5 CONTACTS 4A
 VOLTAGE RATING: 3-4 CONTACTS 250V
 5 CONTACTS 60V

PROTECTION CLASS: IP 67/68/69K
 TEMPERATURE: -25°C / +85°C

CONTACTS POSITION FRONT VIEW:

3 CONTACTS		4 CONTACTS		5 CONTACTS	
PIN	WIRE	PIN	WIRE	PIN	WIRE
1	BROWN	1	BROWN	1	BROWN
2	---	2	WHITE	2	WHITE
3	BLUE	3	BLUE	3	BLUE
4	BLACK	4	BLACK	4	BLACK
5	---	5	---	5	GREY

CODING ACCORDING TO IEC 61076-2-101

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
9	1	LABEL YELLOW	VINYL	---
8	-	CABLE	SEE SHEET 2	---
7	-	OVERMOULD BLACK	TPU	---
6	1	SLEEVE U12 INNER	BRASS	NICKEL
5	1	SLEEVE U12 OUTER	BRASS	NICKEL
4	1	INSERT FEMALE BLACK	PUR	---
3	1	SPRING U12	V4A	---
2	1	ORING GREEN	FPM	---
1	3 / 4 / 5	CONTACT M12 FEMALE	BRONZE	SELECTIVE GOLD OVER NICKEL

QUALITY SYMBOLS FA = 0 FE = 0 FF = 0 GV = 0 CH = 0 CR = 0 CS = 0 CU = 0 CV = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS: MM SCALE: 2:1			
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 °		DRWN BY: JMARSZALEK DATE: 2016/04/06			CSE U12 XP AC FE STR XM SE UNSH
	4 PLACES ± 3 PLACES ± 2 PLACES ± 0.05 1 PLACE ± 0.3 0 PLACES ± 0.5		CHK'D BY: RSILLER DATE: 2016/05/30			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR BY: RSILLER DATE: 2016/05/30			SERIES: 120079 MATERIAL NUMBER: SEE SHEET 2 CUSTOMER: GENERAL MARKET
EC NO: 108894 DRWN: JMARSZALEK CHK'D: RSILLER APPR: RSILLER		A3 THIRD ANGLE PROJECTION		DOCUMENT NUMBER: 1200795043 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 2		

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

OPTIONS

W 0 X 0 0 0 X X X X X X X X

W0=U12
Ultra Lock
Single ended

Poles:
3=3 Poles
4=4 Poles
5=5 Poles

Heads style:
000=Plug Female Straight

Cable type: See Table


Units:
M=Meter
C=Centimeter

Length
Examples:
005=0.5 units
010=1 units
100=10 units

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow

Ultra Lock Assembly:
Blank (Standard)=Brass, Ni Plated
8=Stainless steel, EPDM oring

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables lxx & P82 always with
2 pcs. of I/D Carrier)



CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	SHIELD
E03	3 / 4 / 5	0.34mm ²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
H09	3 / 4 / 5	0.34mm ²	PUR BLACK LS0H	UL 21198/10493	C22.2 I/II A/B 80°/300V	-40°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000 cycles, Temp max 60°C	-
P03	3 / 4 / 5	0.34mm ²	PUR / PVC BLACK	-	-	-30°C to +80°C, 7xO.D.	-5°C to +80°C, 15xO.D.	-	-

CABLE LENGTH TOLERANCES

OVER	UP TO AND INCLUDING	TOLERANCES
0	305mm	+19mm
305mm	915mm	+45mm
915mm	1830mm	+56mm
1830mm	3660mm	+89mm
3660mm	7320mm	+165mm
7320mm	14640mm	+317mm
14640mm	30500mm	+610mm
30500mm	>	+2% of finished length

PART LIST

No.	Molex P/N	Engineering no.	Cable Length
1	1200790266	W04000E03M020	2m
2	1200790277	W05000E03M020	2m
3	1200795022	W04000E03M003	0.3m
4	1200795043	W05000E03M050	5m
5	1200795068	W04000P03M040	4m
6	1200795069	W04000P03M050	5m
7	1200795102	W03000E03M020	2m
8	1200795103	W03000P03M020	2m
9	1200795110	W05000P03M020	2m
10	1200798001	W04000E03M050	5m
11	1200798010	W04000P03M100	10m
12	1200798012	W04000P03M020	2m
13	1200798014	W04000E03M100	10m
14	1200798042	W03000H09M020	2m
15	1200798045	W05000H09M020	2m
16	1200798054	W04000H09M020	2m
17	1200798063	W05000P03M030	3m
18	1200798123	W05000H09C350	0.35m
19	1200798124	W05000H09M003	0.3m
20	1200798126	W04000P03M200	20m

No.	Molex P/N	Engineering no.	Cable Length
21	1200798127	W04000H09M050	5m
22	1200798128	W04000H09M100	10m
23	1200798129	W04000H09M200	20m
24	1200798130	W05000P03M050	5m
25	1200798131	W05000P03M100	10m
26	1200798132	W05000P03M200	20m
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			

QUALITY SYMBOLS FA = 0 FE = 0 FB = 0 FV = 0 FC = 0 FX = 0 FZ = 0 F1 = 0 F2 = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	EC NO: 108894 DRWN: JMARSZALEK CHK'D: RSILLER APPR: RSILLER	2016/09/27	2016/09/29	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE				
		ANGULAR TOL ± 1.0 °		MM	1:1						
	4 PLACES ±		JMARSZALEK	2016/04/06	CSE U12 XP AC FE STR XM SE UNSH						
	3 PLACES ±		CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING						
	2 PLACES ± 0.05		APPR BY	DATE	SERIES MATERIAL NUMBER CUSTOMER						
	1 PLACE ± 0.3		RSILLER	2016/05/30	120079	SEE PART LIST	GENERAL MARKET				
	0 PLACES ± 0.5		DRAWING SIZE	THIRD ANGLE PROJECTION	DOCUMENT NUMBER DOC TYPE DOC PART SHEET NUMBER						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3		1200795043 PSD 000 2 OF 2						