
This document was generated on 10/03/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0022284200
Status: Active
Overview: KK® Interconnect System - Molex
Description: KK 254 Breakaway Header, Vertical, 20 Circuits, Tin (Sn) Plating, Mating Pin Length 6.09mm

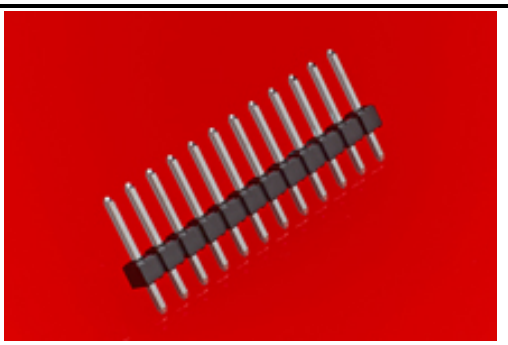

Series image - Reference only

Documents:

- 3D Model
- Drawing (PDF)
- Product Specification PS-10-07-001 (PDF)
- RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	42375
Application	Board-to-Board, Signal, Wire-to-Board
Overview	KK® Interconnect System - Molex
Product Name	KK 254
UPC	800754387293

Physical

Breakaway	Yes
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.524/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.18mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole

EU ELV
Not Relevant

EU RoHS | **China RoHS**
Compliant

REACH SVHC
Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free Status
Not Low-Halogen

For more information, please visit Contact US

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
42375 Series

Mates With
KK Crimp Housing 2695 , 6471 , 7880 , KK PC Board Connector 4455

Electrical	
Current - Maximum per Contact	4.0A
Voltage - Maximum	500V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235
Material Info	
Engineering Number	42375-0020
Reference - Drawing Numbers	
Product Specification	PS-10-07-001
Sales Drawing	SD-42375-001

This document was generated on 10/03/2018
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION