

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0919990478

Status:


Active

Overview:

RAST 5 Connector System

Description:

Appli-Mate RAST 5.0 Header, Vertical, 2 Circuits, Silver (Ag) Plating, Glow-Wire Capable

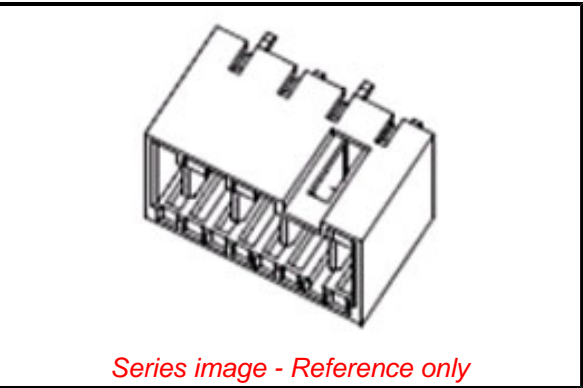

Documents:

Drawing (PDF)

Product Specification PS-99020-0037 (PDF)

Packaging Specification PK-90858-001-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	91999
Application	Power, Wire-to-Board
Comments	""""""This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """"""
Overview	RAST 5 Connector System
Product Name	RAST 5
UPC	883906536145
Physical	
Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Natural
Durability (mating cycles max)	10
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Silver
Material - Plating Termination	Nickel
Material - Resin	Nylon
Net Weight	2.613/g

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per -

ED/61/2018 (27 June

2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

91999 Series

Mates With

Appli-Mate RAST 5 IDT Housing 91778 , 91779

Use With

RAST Standard Interface

Number of Rows	1
Orientation	Vertical
PC Tail Length	3.90mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.40mm
Packaging Type	Bag
Pitch - Mating Interface	5.00mm
Pitch - Termination Interface	5.00mm
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-20° to +120°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	16.0A
Voltage - Maximum	250V AC

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-90858-001-001
Product Specification	PS-99020-0037
Sales Drawing	SD-93319-001

This document was generated on 10/29/2018

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION