
This document was generated on 07/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0513385473
Status: Active
Overview: SlimStack Board-to-Board Connectors
Description: SlimStack Board-to-Board Receptacle, 0.40mm Pitch, J-Bend Series, 0.20µm Gold (Au) Plating, 1.50 or 2.00mm Mated Height, 3.40mm Mated Width, 54 Circuits

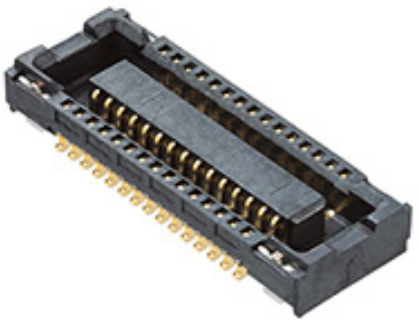

Series image - Reference only

Documents:

- 3D Model
- Datasheet (PDF)
- Drawing (PDF)
- Product Guide (PDF)
- 3D Model (PDF)
- RoHS Certificate of Compliance (PDF)
- Product Specification PS-51338-005 (PDF)
- Reference Guide (PDF)
- Packaging Specification SPK-51338-001-001 (PDF)

EU ELV
Not Relevant

EU RoHS
Compliant

China RoHS

REACH SVHC
Not Contained Per - D(2020)4578-DC (25 June 2020)

Halogen-Free Status
Low-Halogen

For more information, please visit Contact US

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
51338 Series

Mates With
SlimStack J-Bend Plug 55909 , 501745

General

Product Family	PCB Receptacles
Series	51338
Application	Board-to-Board, Signal
Comments	Solder Tab Plating: Tin (Sn) over Nickel
Overview	SlimStack Board-to-Board Connectors
Product Name	SlimStack
Series Name	J-Bend
UPC	884982137639

Physical

Circuits (Loaded)	54
Circuits (maximum)	54
Color - Resin	Black
Durability (mating cycles max)	30
Glow-Wire Capable	No
Lock to Mating Part	Yes
Mated Height	1.50mm
Mated Width	3.40mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Net Weight	93.786/mg
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	0.40mm
Pitch - Termination Interface	0.40mm
Plating min - Mating	0.200µm
Polarized to Mating Part	No
Polarized to PCB	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-25° to +85°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	0.3A
Voltage - Maximum	50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Packaging Specification	SPK-51338-001-001

This document was generated on 07/27/2020
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION