


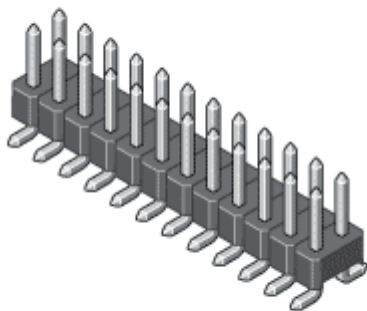


© MPE-GARRY

Straight SMD pin headers 2,54 mm pitch and 0,64 mm square pins, with gull-wing terminations. Many different pin length and plating options as standard. Customized connectors possible.

Double row

|                         |                                                                                       |
|-------------------------|---------------------------------------------------------------------------------------|
| Pitch (mm)              | 2,54                                                                                  |
| Mating contact size     | sq. 0,64                                                                              |
| No of contacts          | 6                                                                                     |
| Positioning peg         | Without positioning peg                                                               |
| Polarising              | No                                                                                    |
| Locking                 | No                                                                                    |
| Material contact        | Copper alloy                                                                          |
| Plating contact         | Au                                                                                    |
| Material insulator      | High temp. thermoplast UL94V-0                                                        |
| Rated current           | 3,0 A                                                                                 |
| Rated voltage           | 250 V <sub>RMS</sub> / V <sub>DC</sub><br>Please consider air- and creepage distances |
| Withstand voltage       | 500 V <sub>RMS</sub> for 1 minute                                                     |
| Operating temperature   | -40°C to +105°C                                                                       |
| Max. processing temper. | 260°C for 10 seconds                                                                  |
| Packaging               | Tube                                                                                  |
| Cap                     | Without cap                                                                           |
| A (Length)              | 17,60                                                                                 |
| B (Mating)              | 13,80                                                                                 |

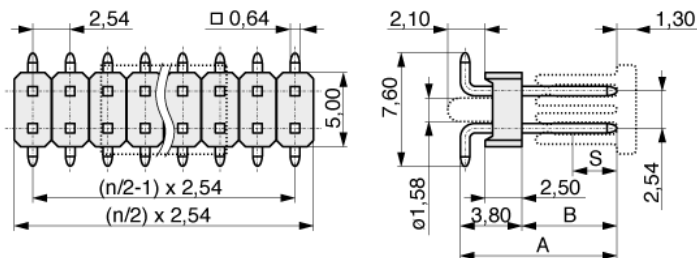

Footprint

