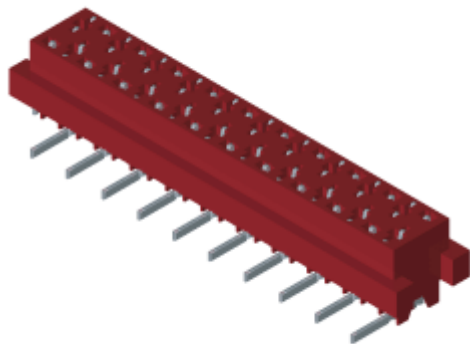


Order code: 374-1-010-0-NTX-KT1

4) FEMALE HEADER


Series: **374**

Wire to board SMD socket connectors 1,27 mm pitch. These parts are compatible with industries standard products.


Without locking feature

Pitch (mm)	1,27
Mating pin size (range)	sq. 0,40x0,68
No of contacts	10
Polarising	Yes
Locking	No
Material contact	Phosphor bronze
Plating contact	Sn
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	230 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	With cap
A	14,70
B	11,43
C	13,22
D	-

[RoHS compliant](#)

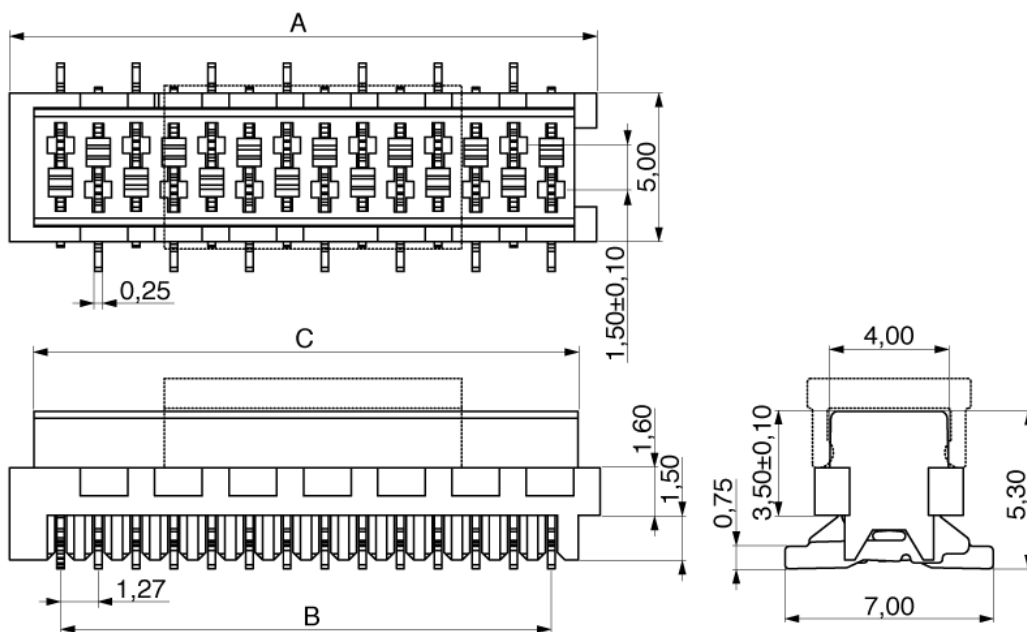

PCB layout

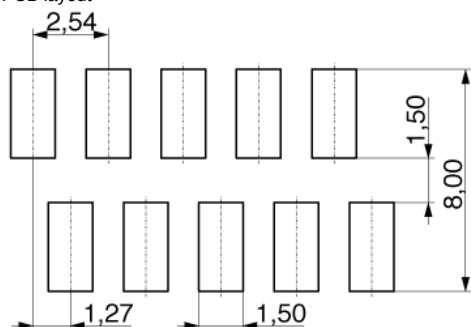**Order code: 374-1-010-0-NTX-KT1**

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: yk@mpe-connector.de

Date: 19.10.2020 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=374-1-010-0-NTX-KT1