


Alchip™-MZA Series

- Endurance : 2,000 to 5,000 hours at 105°C
- Low impedance
- Solvent resistant type(see PRECAUTIONS AND GUIDELINES)
- Vibration resistant structure
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.




SPECIFICATIONS

Items	Characteristics									
Category	-55 to +105°C									
Temperature Range	-55 to +105°C									
Rated Voltage Range	6.3 to 100V _{dc}									
Capacitance Tolerance	±20%(M)									
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)									
Dissipation Factor (tan δ)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V
	tan δ(Max.)	D61 to JA0	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08
		KE0 to MN0	—	—	—	0.16	0.14	0.12	0.12	0.10
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase.										
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V
	Z(-25°C)/Z(+20°C)	2	2	2	2	2	2	2	2	2
	Z(-40°C)/Z(+20°C)	3	3	3	3	3	3	3	3	3
	Z(-55°C)/Z(+20°C)	4	4	4	3	3	3	3	3	3
The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for specified time at 105°C.										
Endurance	Time	D61 to JA0 : 2,000 hours KE0 to MN0 : 5,000 hours								
	Capacitance change	≤ ±30% of the initial value								
	D.F. (tan δ)	≤200% of the initial specified value								
	Leakage current	≤The initial specified value								


DIMENSIONS [mm]

- Terminal Code : A
- Size code : D61 to MN0

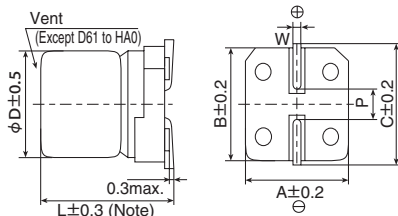

Note : L±0.5 for HA0 to MN0

- Terminal Code : G(Vibration resistant structure)
- Size code : F61 to MN0

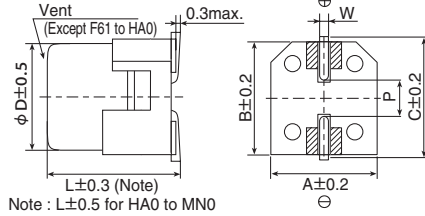


Note : L±0.5 for HA0 to MN0

⊗ : Dummy terminals

Size code	D	L	A	B	C	W	P
D61	4	5.8	4.3	4.3	5.1	0.5 to 0.8	1.0
E61	5	5.8	5.3	5.3	5.9	0.5 to 0.8	1.4
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

PART NUMBERING SYSTEM

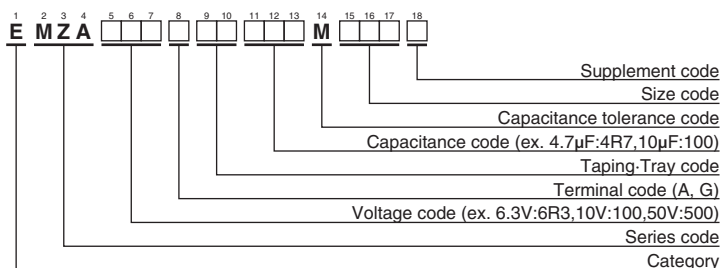


Please refer to "Product code guide (surface mount type)"

MARKING

D61 to JA0
EX) 16V220μF



KE0 to MN0
EX) 25V1,000μF



- Rated voltage symbol (D61 to JA0)

Rated voltage (V _{dc})	6.3	10	16	25	35	50	63	80
Symbol	j	A	C	E	V	H	J	K

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Size code	Impedance (Ω max./ 100kHz)		Rated ripple current (mA rms/ 105°C, 100kHz)	Part No.
			20°C	-40°C		
6.3	22	D61	1.35	—	90	EMZA6R3ARA220MD61G
	47	D61	1.35	—	90	EMZA6R3ARA470MD61G
	47	E61	0.70	—	160	EMZA6R3ARA470ME61G
	100	E61	0.70	—	160	EMZA6R3ARA101ME61G
	100	F61	0.36	—	240	EMZA6R3 □ RA101MF61G
	220	F61	0.36	—	240	EMZA6R3 □ RA221MF61G
	330	F80	0.34	—	280	EMZA6R3 □ RA331MF80G
	470	HA0	0.16	—	600	EMZA6R3 □ RA471MHA0G
	1,000	HA0	0.16	—	600	EMZA6R3 □ RA102MHA0G
	1,500	JA0	0.08	—	850	EMZA6R3 □ RA152MJA0G
10	22	D61	1.35	—	90	EMZA100ARA220MD61G
	33	D61	1.35	—	90	EMZA100ARA330MD61G
	33	E61	0.70	—	160	EMZA100ARA330ME61G
	220	F80	0.34	—	280	EMZA100 □ RA221MF80G
	330	HA0	0.16	—	600	EMZA100 □ RA331MHA0G
	470	HA0	0.16	—	600	EMZA100 □ RA471MHA0G
	680	HA0	0.16	—	600	EMZA100 □ RA681MHA0G
	1,000	JA0	0.08	—	850	EMZA100 □ RA102MJA0G
	10	D61	1.35	—	90	EMZA160ARA100MD61G
	22	D61	1.35	—	90	EMZA160ARA220MD61G
16	22	E61	0.70	—	160	EMZA160ARA220ME61G
	47	E61	0.70	—	160	EMZA160ARA470ME61G
	47	F61	0.36	—	240	EMZA160 □ RA470MF61G
	100	F61	0.36	—	240	EMZA160 □ RA101MF61G
	220	F80	0.34	—	280	EMZA160 □ RA221MF80G
	330	HA0	0.16	—	600	EMZA160 □ RA331MHA0G
	470	HA0	0.16	—	600	EMZA160 □ RA471MHA0G
	680	JA0	0.08	—	850	EMZA160 □ RA681MJA0G
	10	D61	1.35	—	90	EMZA250ARA100MD61G
	22	E61	0.70	—	160	EMZA250ARA220ME61G
25	33	E61	0.70	—	160	EMZA250ARA330ME61G
	33	F61	0.36	—	240	EMZA250 □ RA330MF61G
	47	F61	0.36	—	240	EMZA250 □ RA470MF61G
	100	F80	0.34	—	280	EMZA250 □ RA101MF80G
	220	HA0	0.16	—	600	EMZA250 □ RA221MHA0G
	330	HA0	0.16	—	600	EMZA250 □ RA331MHA0G
	470	JA0	0.08	—	850	EMZA250 □ RA471MJA0G
	1,000	KE0	0.060	0.30	1,320	EMZA250 □ RA102MKE0S
	1,300	KG5	0.056	0.28	1,470	EMZA250 □ RA132MKG5S
	1,800	LH0	0.047	0.24	1,820	EMZA250 □ RA182MLH0S
35	2,400	MH0	0.045	0.23	2,060	EMZA250 □ RA242MMH0S
	3,000	LN0	0.034	0.17	2,400	EMZA250 □ RA302MLN0S
	3,900	MN0	0.032	0.16	2,640	EMZA250 □ RA392MMN0S
	4.7	D61	1.35	—	90	EMZA350ARA4R7MD61G
	10	D61	1.35	—	90	EMZA350ARA100MD61G
	10	E61	0.70	—	160	EMZA350ARA100ME61G
	22	E61	0.70	—	160	EMZA350ARA220ME61G
	33	F61	0.36	—	240	EMZA350 □ RA330MF61G
	47	F61	0.36	—	240	EMZA350 □ RA470MF61G
	100	F80	0.34	—	280	EMZA350 □ RA101MF80G
50	100	HA0	0.16	—	600	EMZA350 □ RA101MHA0G
	220	HA0	0.16	—	600	EMZA350 □ RA221MHA0G
	330	JA0	0.08	—	850	EMZA350 □ RA331MJA0G
	430	KE0	0.11	0.55	980	EMZA350 □ RA431MKE0S
	430	KG5	0.10	0.50	1,090	EMZA350 □ RA431MKG5S
	620	LH0	0.087	0.44	1,320	EMZA350 □ RA621MLH0S
	820	MH0	0.087	0.44	1,420	EMZA350 □ RA821MMH0S
	1,000	LN0	0.050	0.25	1,910	EMZA350 □ RA102MLN0S
	1,300	MN0	0.050	0.25	2,180	EMZA350 □ RA132MMN0S
	4.7	E61	4.8	—	50	EMZA630ARA4R7ME61G
63	10	F61	2.2	—	80	EMZA630 □ RA100MF61G
	22	F80	2.1	—	120	EMZA630 □ RA220MF80G
	33	HA0	0.70	—	250	EMZA630 □ RA330MHA0G
	47	HA0	0.70	—	250	EMZA630 □ RA470MHA0G
	68	HA0	0.70	—	250	EMZA630 □ RA680MHA0G
	100	JA0	0.45	—	400	EMZA630 □ RA101MJA0G
	240	KE0	0.19	1.54	880	EMZA630 □ RA241MKE0S
	300	KG5	0.17	1.19	1,000	EMZA630 □ RA301MKG5S
	430	LH0	0.15	1.05	1,220	EMZA630 □ RA431MLH0S
	560	MH0	0.12	0.84	1,430	EMZA630 □ RA561MMH0S
80	680	LN0	0.085	0.58	1,790	EMZA630 □ RA681MLN0S
	910	MN0	0.070	0.49	1,960	EMZA630 □ RA911MMN0S
	3.3	E61	5.0	—	25	EMZA800ARA3R3ME61G
	4.7	F61	3.0	—	40	EMZA800 □ RA4R7MF61G
	10	F80	2.4	—	60	EMZA800 □ RA100MF80G
	22	HA0	1.3	—	130	EMZA800 □ RA220MHA0G
	33	HA0	1.3	—	130	EMZA800 □ RA330MHA0G
	47	JA0	0.70	—	200	EMZA800 □ RA470MJA0G
	150	KE0	0.22	1.54	810	EMZA800 □ RA151MKE0S
	220	KG5	0.17	1.19	1,000	EMZA800 □ RA221MKG5S
100	330	LH0	0.15	1.05	1,220	EMZA800 □ RA331MLH0S
	430	MH0	0.12	0.84	1,430	EMZA800 □ RA431MMH0S
	470	LN0	0.085	0.58	1,790	EMZA800 □ RA471MLN0S
	680	MN0	0.070	0.49	1,960	EMZA800 □ RA681MMN0S
	110	KE0	0.28	2.24	740	EMZA101 □ RA111MKE0S
	130	KG5	0.21	1.68	900	EMZA101 □ RA131MKG5S
	200	LH0	0.18	1.44	1,090	EMZA101 □ RA201MLH0S
	270	MH0	0.15	1.2	1,280	EMZA101 □ RA271MMH0S
	330	LN0	0.11	0.88	1,580	EMZA101 □ RA331MLN0S
	430	MN0	0.091	0.73	1,690	EMZA101 □ RA431MMN0S

□ : Enter the appropriate terminal code.

The products shown in are not recommended for new designs (NRND).

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Size code	Capacitance(μF)	Frequency(Hz)			
		120	1k	10k	100k
D61 to JA0	3.3 to 4.7	0.35	0.70	0.90	1.00
	10 to 100	0.40	0.75	0.90	1.00
	220 to 470	0.50	0.85	0.94	1.00
	680 to 1,500	0.60	0.87	0.95	1.00
KE0 to MN0	110 to 200	0.40	0.75	0.90	1.00
	220 to 620	0.50	0.85	0.94	1.00
	680 to 1,800	0.60	0.87	0.95	1.00
	2,400 to 3,000	0.75	0.90	0.95	1.00
	3,900	0.85	0.95	0.98	1.00

The deterioration of aluminum electrolytic capacitors accelerates their life due to the internal heating produced by ripple current. For details, refer to Section "5-3 Ripple Current Effect on Lifetime" in the catalog, Technical Note.

Product specifications in this catalog are subject to change without notice. Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.