


Low Signal Relay G6K

- Compact design, offers excellent board space savings.
- Available in 2.54 and 3.2 mm coil-contact terminal spacing.
- “-Y” models meet 2.5 kV Telcordia surge requirements of 2,500V for 2 x 10 μ s.
- Conforms to FCC Part 68 surge requirements of 1,500V for 10 x 160 μ s.
- Available in PCB through-hole, SMT gullwing and SMT “inside-L” terminals.
- UL recognized / CSA and BSI (EN60950) certified.
- Available in single coil latching.
- Rated Carry Current: 2A.
- RoHS Compliant.

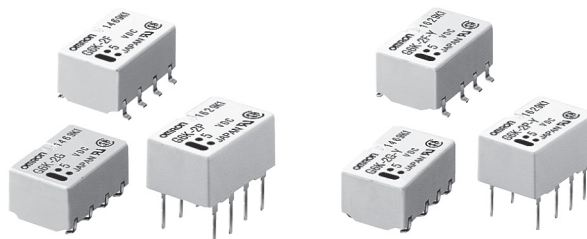

Ordering Information

To Order: Select the part number and add the desired coil voltage rating (e.g., G6K-2F-DC5).

Terminal	Contact form	Model		
		Non-latching 2.54 mm spacing	Non-latching 3.2 mm coil-contact terminal spacing	Single coil latching 3.2 mm coil-contact terminal spacing
Gullwing	DPDT	G6K-2F	G6K-2F-Y	G6KU-2F-Y
Inside “L”		G6K-2G	G6K-2G-Y	G6KU-2G-Y
PCB through-hole		G6K-2P	G6K-2P-Y	G6KU-2P-Y

When ordering tape packing (surface mount versions), add “-TR” to the model number (e.g., G6K-2G-TR-DC5). TR is not part of the relay model number and will not be marked on the relay.

“-Y” models offer an impulse withstand voltage of 2,500 V for 2 x 10 μ s (conforms to Telcordia specifications).

When ordering tape packing, minimum order unit is 2 reels (900 pcs x 2 = 1,800 pcs per box).

When ordering tube packing, the minimum order unit is 10 tubes. (50 pcs x 10 tubes = 500 pcs per box).

Specifications

Contact Data

Load	Resistive load (cos ϕ =1)
Rated load	0.3 A at 125 VAC
	1 A at 30 VDC
Contact type	Bifurcated crossbar
Contact material	Ag (Au-alloy contact)
Rated carry current	2 A
Max. switching voltage	125 VAC, 60 VDC
Max. switching current	1 A
Max. switching capacity	37.5 VA, 30W
Min. permissible load (See note)	10 μ A at 10 mVDC

Note: This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 50 Ω . This value may vary depending on the switching frequency and operating environment. Always double-check relay suitability under actual operating conditions.

■ Coil Data

G6K- 2.5 mm coil-contact terminal spacing, standard, non-latching (G6K-2F, G6K-2G, G6K-2P)

G6K- 3.2 mm coil-contact terminal spacing, non-latching (G6K-2F-Y, G6K-2G-Y, G6K-2P-Y)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (mW)
			% of rated value			
3	33.0	91	80% max.	10% min.	150% max.	Approx. 100
4.5	23.2	194				
5	21.1	237				
6	17.6	341				
9	11.3	795				
12	9.1	1,315				
24	4.6	5,220				

G6KU- 3.2 mm spacing, single coil latching (G6KU-2F-Y, G6KU-2G-Y, G6KU-2P-Y)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Set-up voltage	Reset voltage	Maximum voltage	Power consumption (mW)
			% of rated value			
3	33.0	91	75% max.	75% max.	150% max.	Approx. 100
4.5	23.2	194				
5	21.1	237				
6	17.6	341				
9	11.3	795				
12	9.1	1,315				
24	4.6	5,220				

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ± 10%.

2. The operating characteristics are measured at a coil temperature of 23°C unless otherwise specified.

3. Pick-up voltage will vary with temperature

4. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.

■ Characteristics

Contact resistance (See note 1)		100 mΩ max.
Operate (set) time (See note 2)		3 ms max. (Approx. 1.4 ms - standard. Approx. 1.2 ms - latching)
Release (set) time (See note 2)		3 ms max. (Approx. 1.3 ms - standard. Approx. 1.2 ms - latching)
Insulation resistance (See note 3)		1,000 MΩ min. (at 500 VDC)
Dielectric strength		1,500 VAC, 50/60 Hz for 1 minute between coil contacts 1,000 VAC, 50/60 Hz for 1 minute between contacts of different polarity 750 VAC, 50/60 Hz for 1 minute between contacts of the same polarity
Surge withstand voltage	“-Y” versions	2,500 V, (2 x 10 μs) between coil and contacts. 1,500 V, (10 x 160 μs) between coil and contacts / contacts of different and same polarity. (Conforms to Telcordia and FCC Part 68 specifications)
	Standard versions	1,500 V, (10 x 160 μs) between coil and contacts / contacts of different and same polarity. (Conforms to FCC Part 68)
Vibration	Mechanical durability	10 to 55 Hz; 5.0 mm double amplitude and 50 to 500 Hz, 300 m/s ²
	Malfunction durability	10 to 55 Hz; 3.3 mm double amplitude and 50 to 500 Hz, 300 m/s ²
Shock	Mechanical durability	1,000 m/s ² (approx. 100G)
	Malfunction durability	750 m/s ² (approx. 75G)
Ambient operating temperature		-40°C to 70°C with no icing or condensation
Ambient operating humidity		5 to 85% RH
Service life	Mechanical	50,000,000 operations min. (at 36,000 operations per hour)
	Electrical	100,000 operations min. at rated load (at 1,800 operations per hour)
Weight		Approx. 0.7 g

Note: 1. The contact resistance was measured with 10 mA at 1 VDC with a voltage-drop method.

2. Values in parentheses are typical values unless otherwise stated.


3. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those for checking the dielectric strength.

4. Data shown are of initial value.


5. The minimum set/reset signal width is 10 ms, for latching coil versions.

Characteristic data


Maximum Switching Capacity

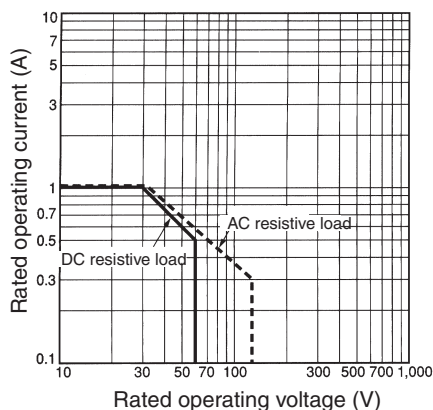

Ambient Temperature vs. Maximum Coil Voltage

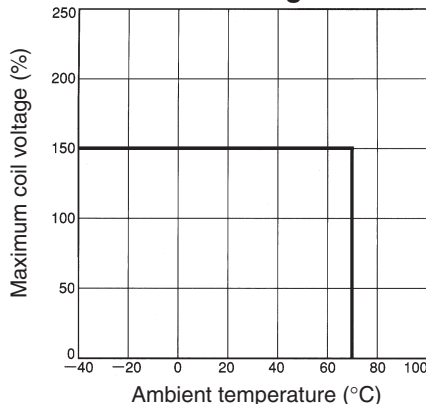


Ambient Temperature vs. Carry Current

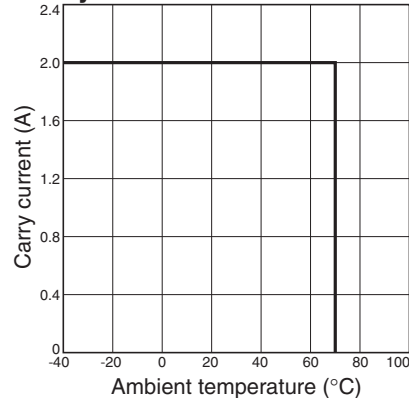


Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


Electrical Service Life

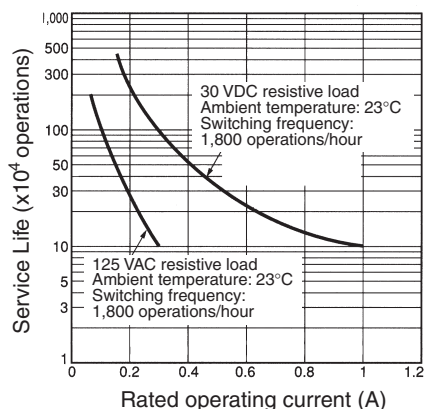


Ambient Temperature vs. Must Operate or Must Release Voltage

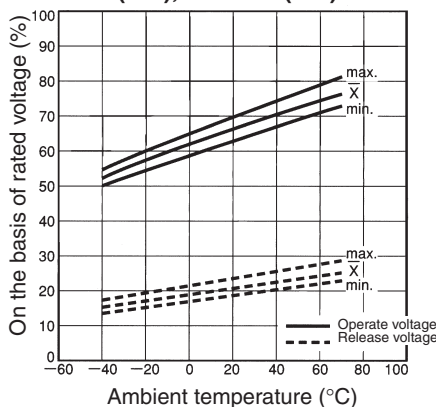


Ambient Temperature vs. Must Set or Must Reset Voltage

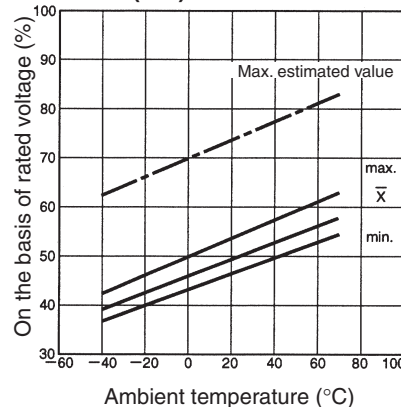

Shock Malfunction

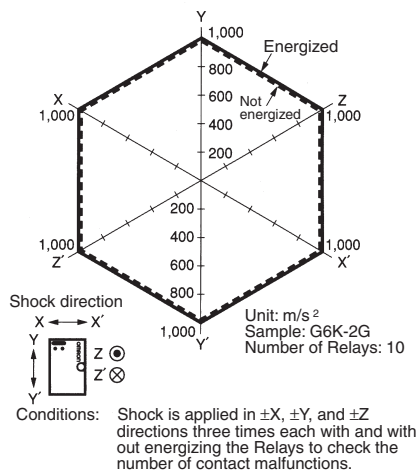


Electrical Service Life (with Must Operate and Must Release Voltage)

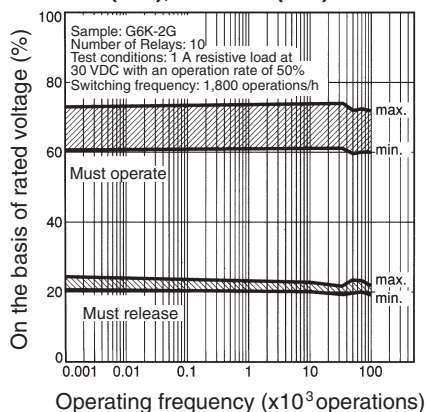


Note: The tests were conducted at an ambient temperature of 23°C.

Electrical Service Life (Contact Resistance)

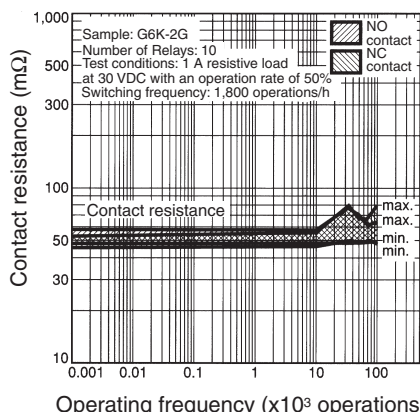


Note: The tests were conducted at an ambient temperature of 23°C.


Contact Reliability Test (See notes.)
G6K-2G (F/P), G6K-2G (F/P)-Y

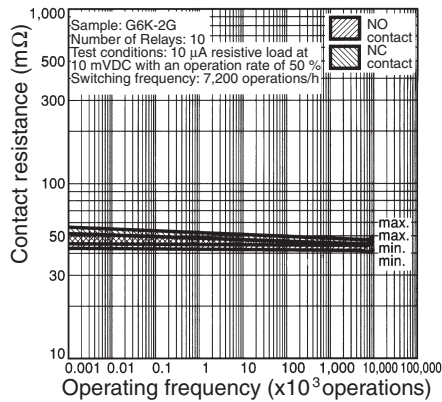

Mutual Magnetic Interference
G6K-2G (F/P), G6K-2G (F/P)-Y

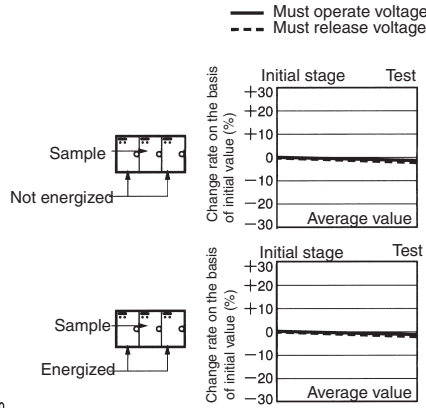




Mutual Magnetic Interference
G6K-2G (F/P), G6K-2G (F/P)-Y

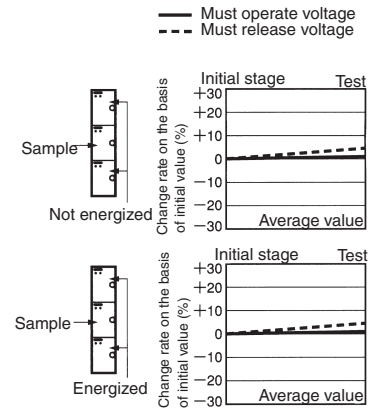


Note 1: The test was conducted at an ambient temperature of 23°C.

2: The contact resistance data are periodically measured reference values and are not values from each monitoring operation. Contact resistance values will vary according to the switching frequency and operating environment, so be sure to check operation under the actual operating conditions before use.


External Magnetic Interference
G6K-2G (F/P), G6K-2G (F/P)-Y

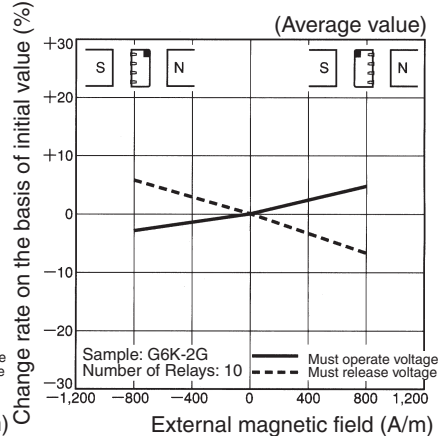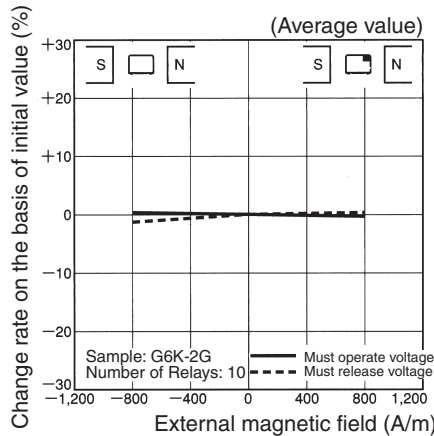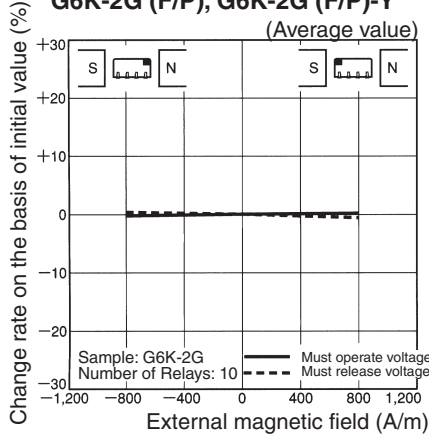


High-frequency Characteristics (Isolation)
G6K-2G (F/P), G6K-2G (F/P)-Y

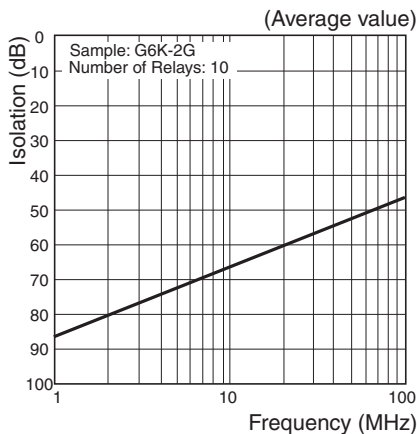

High-frequency Characteristics (Insertion Loss)
G6K-2G (F/P), G6K-2G (F/P)-Y

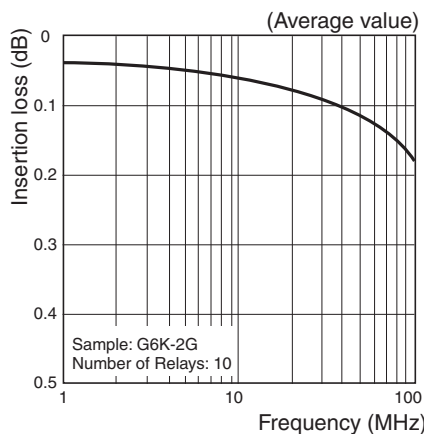


High-frequency Characteristics (Return Loss)
G6K-2G (F/P), G6K-2G (F/P)-Y

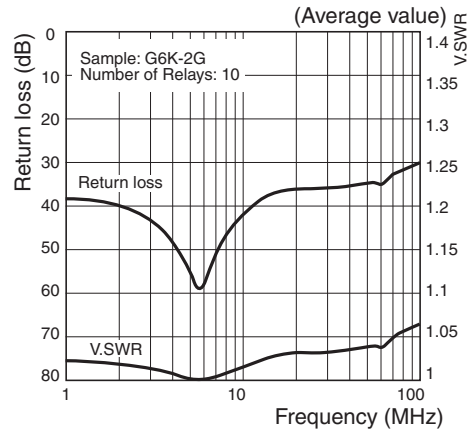


Note: 1. The tests were conducted at an ambient temperature of 23°C.

2. High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics including endurance in the actual machine before use.


Must Operate and Must Release Time Distribution (See note.)
G6K-2G (F/P), G6K-2G (F/P)-Y

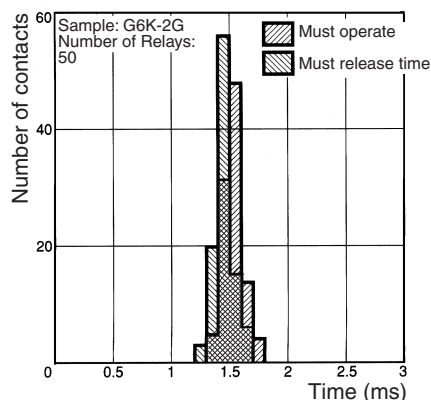

Must Operate and Must Release Bounce Time Distribution (See note.)
G6K-2G (F/P), G6K-2G (F/P)-Y

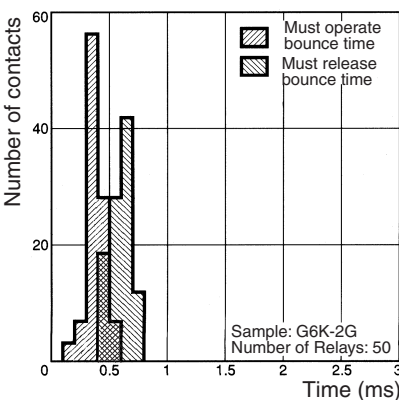

Vibration Resistance
G6K-2G (F/P), G6K-2G (F/P)-Y

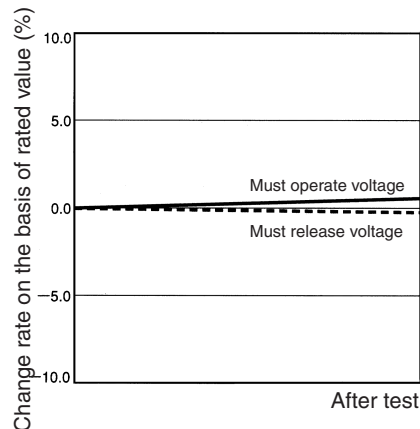

Note: The tests were conducted at an ambient temperature of 23°C.

Approvals

UL Recognized (File No. E41515) / CSA Certified (File No. LR31928)

Contact form	Coil rating	Contact ratings at 40°C	Number of test operations
DPDT	3 to 24 VDC	2 A at 30 VDC (Resistive) 0.5 A at 60 VDC (Resistive) 0.3 A at 125 VAC (General Use)	6,000




BSI (EN60950) (File No. 9054)

Contact form	Isolation Category	Voltage
DPDT	Basic Insulation	125 VAC


Dimensions

Note: All units are in millimeters unless otherwise indicated.


G6K-2F



Mounting Dimensions (Top View)
 Tolerance: ±0.1 mm



Terminal Arrangement/Internal Connections (Top View)






Orientation mark

Note: Check carefully the coil polarity of the relay.


Note 1: Each value has a tolerance of ±0.3 mm.
 Note 2: The coplanarity of the terminals is 0.1 mm max.

G6K-2G




*Effective as of our production in July, 2013

Mounting Dimensions (Top View)
 Tolerance: ±0.1 mm



Terminal Arrangement/Internal Connections (Top View)






Orientation mark


Note: Check carefully the coil polarity of the relay.

Note 1: Each value has a tolerance of ±0.3 mm.
 Note 2: The coplanarity of the terminals is 0.1 mm max.


G6K-2P



Mounting Dimensions (Bottom View)
 Tolerance: ±0.1 mm



Terminal Arrangement/Internal Connections (Bottom View)





Orientation mark

Note: Check carefully the coil polarity of the relay.


Note: Each value has a tolerance of ±0.3 mm.

G6K-2F-Y

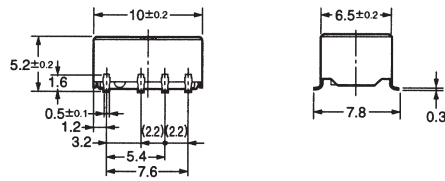


Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm





**Terminal Arrangement/
Internal Connections
(Top View)**



Orientation mark
Note: Check carefully the coil polarity of the relay.


Note 1: Each value has a tolerance of ± 0.3 mm.
Note 2: The coplanarity of the terminals is 0.1 mm max.

G6K-2G-Y

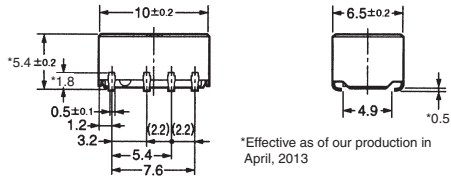


Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm



**Terminal Arrangement/
Internal Connections
(Top View)**





Orientation mark
Note: Check carefully the coil polarity of the relay.

Note 1: Each value has a tolerance of ± 0.3 mm.
Note 2: The coplanarity of the terminals is 0.1 mm max.


*Effective as of our production in April, 2013

G6K-2P-Y

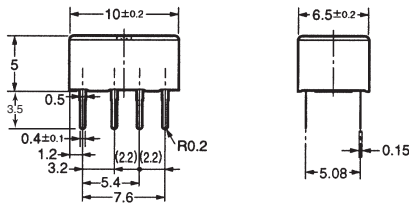


Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm





**Terminal Arrangement/
Internal Connections
(Bottom View)**



Orientation mark
Note: Check carefully the coil polarity of the relay.


Note: Each value has a tolerance of ± 0.3 mm.

G6KU-2F-Y

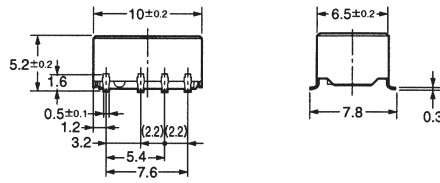


Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm





**Terminal Arrangement/
Internal Connections
(Top View)**



Orientation mark
Note: Check carefully the coil polarity of the relay.


Note 1: Each value has a tolerance of ± 0.3 mm.
Note 2: The coplanarity of the terminals is 0.1 mm max.

G6KU-2G-Y

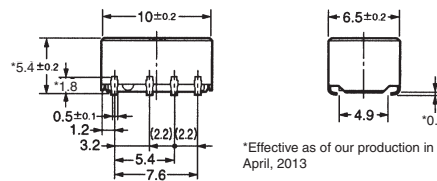


Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm



**Terminal Arrangement/
Internal Connections
(Top View)**





Orientation mark
Note: Check carefully the coil polarity of the relay.

Note 1: Each value has a tolerance of ± 0.3 mm.
Note 2: The coplanarity of the terminals is 0.1 mm max.


*Effective as of our production in April, 2013

G6KU-2P-Y

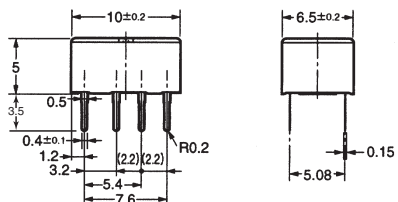


Mounting Dimensions (Bottom View)

Tolerance: ± 0.1 mm



**Terminal Arrangement/
Internal Connections
(Bottom View)**




Orientation mark
Note: Check carefully the coil polarity of the relay.

Note: Each value has a tolerance of ± 0.3 mm.

■ Packaging Information

Tube packing	Standard nomenclature	50 pcs per anti-static tube 10 tubes per box Order in box multiples (500 pcs)
Tape packing (SMT versions, only)	When ordering, add "TR" before the rated coil voltage (e.g., G6K-2G-TR-DC5). Note: TR is not part of the relay model number and will not be marked on the relay.	900 pcs per reel 2 reels per box Order in box multiples (1,800 pcs) (see details below)

Relays in tube packing are arranged so that the orientation mark of each Relay is on the left side.
Be sure to reference Relay orientation when mounting the Relay to the PCB.

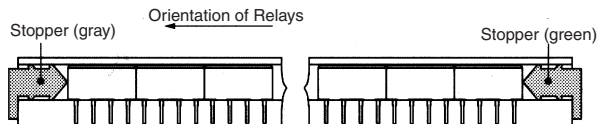


Tube length: 520 mm (stopper not included)
No. of Relays per Tube: 50
No. of Relays per Box: 500

■ Tape and Reel Dimensions (Surface Mount Models)


- Relays per reel: 900
- Relays per box: 1,800

1. Direction of Relay Insertion

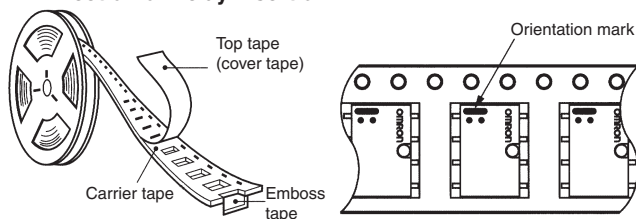


3. Carrier Tape Dimensions


G6K-2F, G6K-2F-Y, G6KU-2F-Y

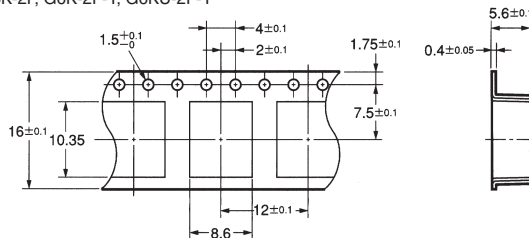

2. Reel Dimensions

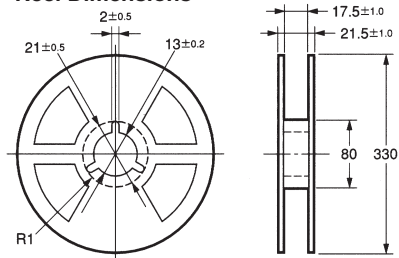

G6K-2G, G6K-2G-Y, G6KU-2G-Y

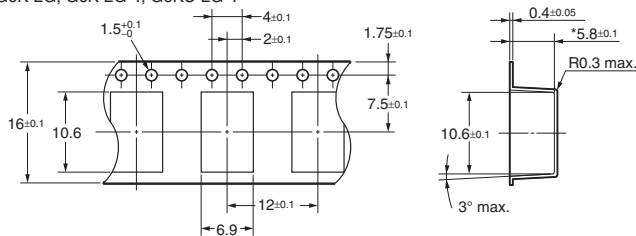


*G6K(U)-2G-Y: Effective as of our production in April, 2013
G6K-2G: Effective as of our production in July, 2013

Recommended Soldering Method


IRS Method (for surface mounting terminal models)

(1) IRS Method (Mounting Solder: Lead)

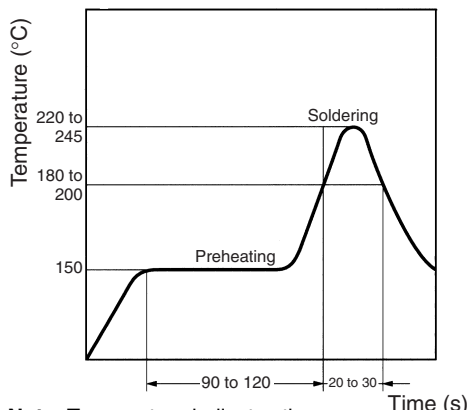


Note: Temperature indicates the surface temperature of the PCBs

- The thickness of cream solder to be applied should be within a range between 150 and 200 μm on OMRON's recommended PCB pattern.
- In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left side.

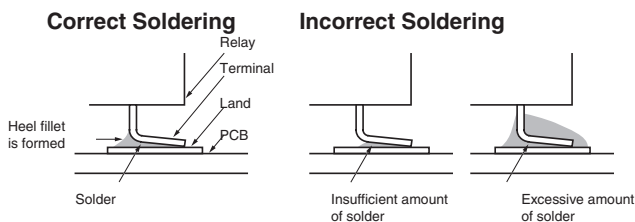

Visually check that the Relay is properly soldered.

(2) IRS Method (Mounting Solder: Lead-free)

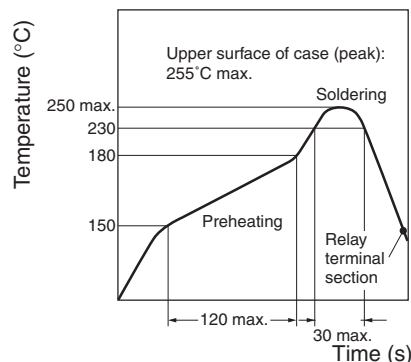

Note: The temperature profile indicates the temperature of the relay terminal section.

Precautions

Correct Use

Long-term Continuously ON Contacts

Using the relay in a circuit where the relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. We recommend using a latching relay (magnetic-holding relay) in this kind of circuit. If a single-side stable (non-latching) must be used in this kind of circuit, we recommend using a fail-safe circuit design that provides protection against contact failure or coil burn out.


Handling

Use the relay as soon as possible after opening the moisture-proof package. (As a guideline, use the Relay within one week at 30°C or less and 60% RH or less.) If the relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the relay after opening the moisture-proof package, place it into the original package and seal the package with adhesive tape.

When washing the product after soldering the relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40 °C. Do not put the relay in a cold cleaning bath immediately after soldering.

Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, make sure to set the securing force of each claw to the following so that the Relays characteristics will be maintained.



Environmental Conditions During Operation, Storage, and Transportation

Protect the relay from direct sunlight and keep the relay under normal temperature, humidity and pressure.

Latching Relay Mounting

Make sure that the vibration or shock that is generated from other devices, such as relays in operation, on the same panel and imposed on the Latching Relay does not exceed the rated value, otherwise the Latching Relay that has been set may be reset or vice versa. The Latching Relay is reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relay may be set accidentally. Be sure to apply a reset signal before use.

Maximum Allowable Voltage

The maximum allowable voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum allowable voltage also involves important restrictions which include the following:

- Must not cause thermal changes in or deterioration of the insulating material.
- Must not cause damage to other control devices.
- Must not cause any harmful effect on people.
- Must not cause fire.

Therefore, be sure to use the maximum allowable voltage as specified in the catalog.



As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than or equal to the maximum allowable voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase which may affect characteristics such as electrical life and coil insulation.

Coating

The Relay mounting on the PCB may be coated or washed but do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relay.

PCB Mounting

If two or more Relays are closely mounted with the long sides of the Relays facing each other and soldering is performed with infrared radiation, the solder may not be properly exposed to the infrared rays. Be sure to keep the proper distance between adjacent Relays as shown below to insure formation of good solder joints.

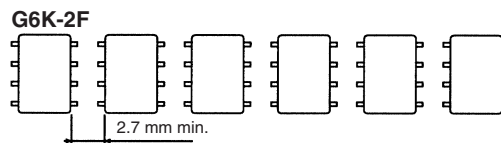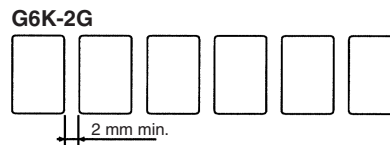

Two or more Relays may be mounted as closely as desired with the short sides of the Relays facing each other.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]
OMRON ELECTRONIC
COMPONENTS LLC
847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>