

product: DELPHI PN 15344957

material: CUNISI

surface: F.SN3

material thickness: 0,60 mm

cross section [mm²]: 4,0 + 4,0

strip length: 5,50 mm

cable type: FLR9Y-B

insulation ø [mm]:

seal:

**Uncontrolled
Copy**
For Information only!


conductor dimension					crimp dimension [mm]				
cable arr.	cable type	cross sect. [mm ²]	struct. n x d [mm]	tear-out force [N]	core height ± 0,05	core width ± 0,10	insulation height ± 0,20	insulation width ± 0,20	
top	FLR9Y-B	4,0 + 4,0	56 x 0,31 + 56 x 0,31	350	3,00	5,60	6,90	7,60	<u>core:</u> C-5.50-4.5-24 DPN 10783864 <u>insulation:</u> IO-7.25-4.0-24 DPN 10764105 <u>anvil:</u> <u>two piece anvil:</u> AC-5.50-4.75 DPN 10764104 AI-7.25-6.6-0.8 DPN 10806553

Notice to cable arrangement:

side: cables side by side

top: one cable on top of the other

n. d.: not defined

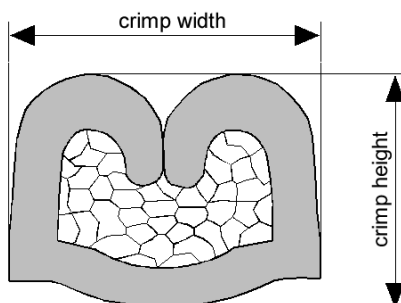

DELPHI PN 15344957



cable:

$$4,00 \text{ mm}^2 + 4,00 \text{ mm}^2 =$$

$$56 \times 0,31 \text{ mm} + 56 \times 0,31 \text{ mm}$$

crimp height:

3,00 mm

crimp width:

5,60 mm