

Cable marker - WMTB-AL (60X15) - 0830525

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable marker, Aluminum label, aluminum, unlabeled, can be labeled with: BLUEMARK CLED, Mounting type: Assembly with cable binders, Cable diameter: >4.6 mm, Lettering field: 60 x 15 mm

The figure shows a version of the article

Product Features

- Aluminum cable marking for assembly with cable binders
- High-quality appearance
- Suitable for large-surface marking of conductors and cables > 2.9 mm in diameter



Key commercial data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 pc |
| Minimum order quantity | 45 pc |
| Weight per Piece (excluding packing) | 2.222 GRM |
| Custom tariff number | 76169990 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|------------|-------|
| Length (b) | 79 mm |
| Width (a) | 15 mm |

Ambient conditions

| | |
|--------------------------------|-------------|
| Recommended storage conditions | 5°C to 25°C |
|--------------------------------|-------------|

General

| | |
|------------|---|
| Color | aluminum |
| Components | free from silicone, halogen and cadmium |
| Material | Aluminum |

Cable marker - WMTB-AL (60X15) - 0830525

Technical data

General

| | |
|---|-------------------------------------|
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Printability | UV LED technologie |
| Device | 5147999 BLUEMARK CLED |
| | 5146662 BLUEMARK CLED-FLUID-CARTR. |
| Test for substances that would hinder coating with paint or varnish | VW PV 3.10.7:2005-02 |
| Result | Test passed |
| Test specification weathering-resistance | Following ISO 4892-2:2013-03 |
| Test duration | 96 h |
| Wipe resistance test result | Test passed |
| Salt spray test specification | DIN EN 60068-2-11:2000-02 |
| Test duration | 96 h |
| Salt spray testing result | Test passed |
| Alternating condensation climate with SO2 test specification | Following DIN 50018:2013-05 |
| Climate level | AHT 1.0 S |
| Cycles | 2 |
| Condensation test result | Test passed |
| Wipe resistance of test specification inscriptions | DIN EN 61010-1 (VDE 0411-1):2011-07 |
| Result | Test passed |
| Marking mounting type | Assembly with cable binders |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 24190219 |
| eCl@ss 4.1 | 24190219 |
| eCl@ss 5.0 | 27149103 |
| eCl@ss 5.1 | 27400401 |
| eCl@ss 6.0 | 27149103 |
| eCl@ss 7.0 | 27400401 |
| eCl@ss 8.0 | 27400401 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC001530 |
| ETIM 5.0 | EC001530 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 6.01 | 30211811 |
|-------------|----------|

Cable marker - WMTB-AL (60X15) - 0830525

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Accessories

Accessories

Magazine

Magazine - BLUEMARK MAG WM-M (60X15) - 0802746



Magazine, Length: 120 mm, Width: 76 mm, Color: white

Drawings

Feature photo

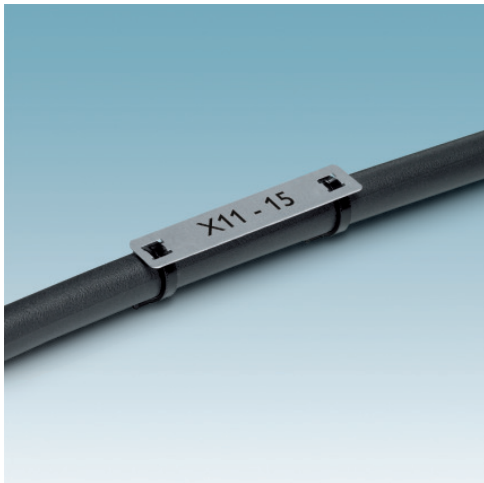


Figure may contain other products.

Feature photo



Figure may contain other products.

Cable marker - WMTB-AL (60X15) - 0830525

Feature photo



Figure may contain other products.