

## Front adapters - FLKM 14-PA-INLINE/IN16 - 2302751

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE front adapter for Inline modules, for transferring 16 (2 x 8) digital input signals.



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	55.8 GRM
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### General

Nominal voltage $U_N$	< 50 V AC
	60 V DC
Max. permissible current	1 A (per path)
Channels which can be connected	16
Connection type, connector	IDC/FLK pin strip (2.54 mm)
Number of connectors	2
No. of positions, connector	14
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### Supported controller

## Front adapters - FLKM 14-PA-INLINE/IN16 - 2302751

### Technical data

#### Supported controller

Controller	PHOENIX CONTACT Inline
- suitable I/O card	IB IL 24 DI 16-PAC
	IB IL 24 DI 16-NPN-PAC
	ILB ... 24 DI16
	ILB ... 24 DI32
	ILB ... 24 DI16 DO16

### Classifications

#### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	27242208

#### ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC002584


#### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402

### Drawings

## Front adapters - FLKM 14-PA-INLINE/IN16 - 2302751

Circuit diagram

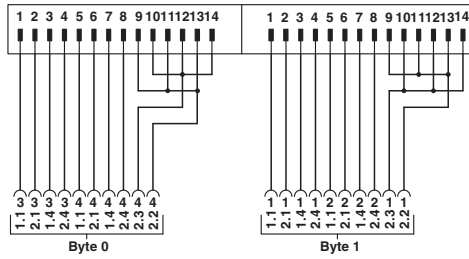

Connection scheme: FLKM 14-PA-INLINE/IN16

Connection diagram

