

Marker for terminal blocks - US-TM 100 CUS - 0829948

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: By card, white, labeled according to customer specifications, Mounting type: Snap into universal marker groove, Lettering field: 104 x 9.8 mm



Why buy this product

- ✓ The cards provide space for including function texts
- ✓ The markers, which are supplied as uniform cards, can be labeled quickly, easily, and precisely using the THERMOMARK CARD
- ✓ Labeling service: Phoenix Contact can custom-label all UniSheet markers according to your requirements
- ✓ The perforated marking strips are easy to separate and can be easily fitted
- ✓ The US-TM 100 UniSheet markers are suitable for products with universal marker grooves



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 609982
GTIN	4046356609982
Weight per Piece (excluding packing)	15.280 g
Custom tariff number	49119900
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

Dimensions

Length (b)	9.8 mm
Width (a)	104 mm
Height	0.5 mm

Ambient conditions

Ambient temperature (operation)	-30 °C ... 80 °C
Recommended storage conditions	10-30 °C / 40-70 % relative humidity. Storage in the original packaging is recommended prior to processing.

Marker for terminal blocks - US-TM 100 CUS - 0829948

Technical data

General

Color	white
Components	Silicone-free
Flammability rating according to UL 94	V0
Material	PVC
	PVC
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	13
Number of individual labels per row	1
Printability	Thermal transfer
Device	5146464 THERMOMARK CARD
Ink ribbon	5146451 THERMOMARK CARD-US-MAG1
	0801371 THERMOMARK-RIBBON 110-TC
Test for substances that would hinder coating with paint or varnish	VW PV 3.10.7:2005-02
Result	Test passed
Test specification weathering-resistance	Following ISO 4892-2:2013-03
Test duration	96 h
Wipe resistance test result	Test passed
Salt spray test specification	DIN EN 60068-2-11:2000-02
Test duration	96 h
Salt spray testing result	Test passed
Alternating condensation climate with SO2 test specification	following DIN 50018:2013-05
Climate level	AHT 1.0 S
Cycles	2
Condensation test result	Test passed
Wipe resistance of test specification inscriptions	DIN EN 61010-1 (VDE 0411-1):2011-07
Result	Test passed
Marking mounting type	Snap into universal marker groove


Standards and Regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Flammability rating according to UL 94	V0

Drawings

Marker for terminal blocks - US-TM 100 CUS - 0829948

Schematic diagram

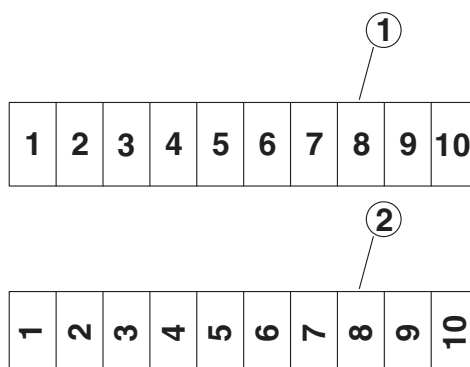

- ① Horizontal
- ② Vertical

Classifications

eCl@ss

eCl@ss 4.0	24190208
eCl@ss 4.1	24190208
eCl@ss 5.0	27149103
eCl@ss 5.1	27141137
eCl@ss 6.0	27141137
eCl@ss 7.0	27141137
eCl@ss 8.0	27141137
eCl@ss 9.0	27141137

ETIM

ETIM 3.0	EC000761
ETIM 4.0	EC000761
ETIM 5.0	EC000761
ETIM 6.0	EC000761

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39131505