

RJ45 sleeve housings - VS-08-T-RJ45/IP67 - 1688696

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



RJ45 sleeve housing, IP67, for pin insert VS-08-ST-RJ45, with push-pull interlocking for panel mounting frames, for cable cross section 5.0 mm ... 6.5 mm



Key Commercial Data

Packing unit	5 STK
GTIN	 4 017918 863616
GTIN	4017918863616
Weight per Piece (excluding packing)	15.000 g
Custom tariff number	85472000
Country of origin	Germany

Technical data

Mechanical characteristics

Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 6.5 mm
Cable outlet	straight
Color	gray
Tightening torque max.	2.5 Nm
Degree of protection	IP67
Type	RJ45, IP67, version 6
No. of cable outlets	1

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
---------------------------------	------------------

Material data

Flammability rating according to UL 94	V0
Housing material	PA
O-ring material	FPM

RJ45 sleeve housings - VS-08-T-RJ45/IP67 - 1688696

Technical data

Material data

Cable seal material	NBR
Height	43 mm

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

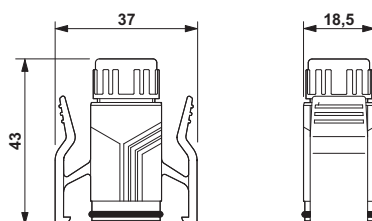

RJ45 sleeve housing IP67

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260705
eCl@ss 7.0	27440312
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 2.0	EC000764
ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC000437
ETIM 6.0	EC000437

UNSPSC

UNSPSC 6.01	31261501
-------------	----------

RJ45 sleeve housings - VS-08-T-RJ45/IP67 - 1688696

Classifications

UNSPSC

UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Accessories

Accessories

Male insert

RJ45 male insert - VS-08-ST-RJ45 - 1688573



RJ45 pin insert, CAT5e, 8-pos., shielded, IDC connection method, for litz wires AWG 26 and solid wires AWG 26 ... 24

Protective cover

Protective covers - VS-SCRJ-PC - 1653757



IP67 protective cover, for covering the male inserts in the sleeve housings IP67, VS-SC-RJ-..., VS-04-..., VS-06-... and VS-08-...