

PCB terminal block - ZFKDSA 1,5-W-5,08-11 - 1706858

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB terminal block, nominal current: 16 A, nom. voltage: 400 V, pitch: 5.08 mm, number of positions: 11, connection method: Spring-cage connection, mounting: Wave soldering, conductor/PCB connection direction: 45°, color: green



The figure shows the 10-position version

Your advantages

- ✔ Defined contact force ensures that contact remains stable over the long term
- ✔ Can be operated without tools by means of color-coded actuating lever
- ✔ Angled connection enables multi-row arrangement on the PCB
- ✔ The latching on the side enables various numbers of positions to be combined
- ✔ Two solder pins reduce the mechanical strain on the soldering spots

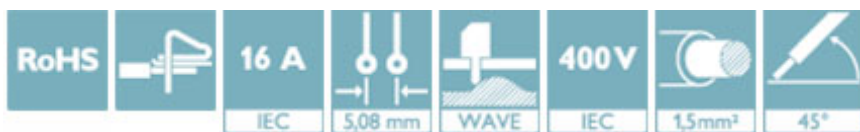

Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4046356886758
Weight per Piece (excluding packing)	11.990 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Classifications

eCl@ss

eCl@ss 4.0	27141109
------------	----------

PCB terminal block - ZFKDSA 1,5-W-5,08-11 - 1706858

Classifications

eCl@ss

eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27261100
eCl@ss 6.0	27261100
eCl@ss 7.0	27440401
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002643
ETIM 6.0	EC002643

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------