

## Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, cable length: 0.5 m

RoHS

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 882125
GTIN	4046356882125
Weight per Piece (excluding packing)	620.000 g
Custom tariff number	85444290
Country of origin	Germany

### Technical data

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 80 °C

#### General

Max. permissible operating voltage	250 V AC/DC
Max. permissible current	6 A (per single wire at 40°C) 4 A (per single wire at 60°C)
Max. permissible total current	20 A (per cable at 40 °C) 16 A (per cable at 60°C)
Mounting position	any
Nominal operating mode	100% operating factor
Degree of protection	IP20

#### Connection data 1

Connection name	Controller level
Connection method	Plug connection

## Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

### Technical data

#### Connection data 1

Note	Can be plugged onto 40-pos. I/O modules
------	---

#### Connection data 2

Connection name	Field level
Connection method	COMBICON connectors
Number of connections	4
Number of positions	10
Pitch	5.2 mm

#### Cable

Conductor construction: Number of litz wires:	16
Single wire, material	Cu uninsulated
Single wire, cross section	0.5 mm <sup>2</sup>
External diameter	9 mm
Length of cable	0.5 m
Max. conductor resistance	≤ 39 Ω/km

#### Supported controller

Controller	SIEMENS S7-300 / ET 200 M
- suitable I/O card	6ES7 321-1BL00-0AA0
	6ES7 321-1EL00-0AA0
	6ES7 321-1CH00-0AA0
	6ES7 321-1FF10-0AA0
	6ES7 322-1BL00-0AA0
	6ES7 322-8BH10-0AB0
	6ES7 322-5GH00-0AB0
	6ES7 322-5FF00-0AB0
	6ES7 322-5HF00-0AB0
	6ES7 322-1HF10-0AA0
	6ES7 323-1BL00-0AA0
	6ES7 331-7NF00-0AB0
	6ES7 331-7NF10-0AB0
	6ES7 331-1KF02-0AB0
	6ES7 331-7PF01-0AB0
	6ES7 331-7PF11-0AB0
	6ES7 331-7PE10-0AB0
	6ES7 332-5HF00-0AB0
	6ES7 326-1BK02-0AB0
	6ES7 326-1RF00-0AB0
	6ES7 326-2BF41-0AB0
	6ES7 326-2BF01-0AB0
	6ES7 326-2BF10-0AB0

# Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

## Technical data

### Supported controller

	6ES7 336-1HE00-0AB0
--	---------------------

### Standards and Regulations

Connection in acc. with standard	CUL
Standards/regulations	DIN EN 50178
	IEC 60664
Rated insulation voltage	260 V
Rated surge voltage	4 kV
Insulation	Basic insulation
Degree of pollution	2
Overvoltage category	III

### Environmental Product Compliance


REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Connection diagram


Pin S7-300	Wire color	PIN COMBI	
1	white	1	
2	brown	2	
3	green	3	
4	yellow	4	
5	gray	5	
6	pink	6	
7	blue	7	
8	red	8	
9	black	9	
10	violet	10	Plug 1
11	white	11	
12	brown	12	
13	green	13	
14	yellow	14	
15	gray	15	
16	pink	16	
17	blue	17	
18	red	18	
19	black	19	
20	violet	20	Plug 2
21	white	21	
22	brown	22	
23	green	23	
24	yellow	24	
25	gray	25	
26	pink	26	
27	blue	27	
28	red	28	
29	black	29	
30	violet	30	Plug 3
31	white	31	
32	brown	32	
33	green	33	
34	yellow	34	
35	gray	35	
36	pink	36	
37	blue	37	
38	red	38	
39	black	39	
40	violet	40	Plug 4

Dimensional drawing

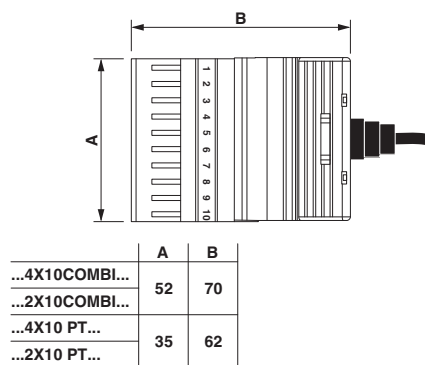

# Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

Circuit diagram

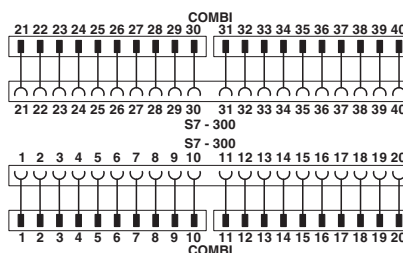

## Classifications

### eCl@ss

eCl@ss 5.0	27249290
eCl@ss 5.1	27061800
eCl@ss 6.0	27249200
eCl@ss 7.0	27249290
eCl@ss 8.0	27249290
eCl@ss 9.0	27242292

### ETIM

ETIM 4.0	EC002584
ETIM 5.0	EC002584
ETIM 6.0	EC002584

### UNSPSC

UNSPSC 6.01	26121620
UNSPSC 7.0901	26121620
UNSPSC 11	26121620
UNSPSC 12.01	26121620
UNSPSC 13.2	32151601

## Approvals

### Approvals

#### Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

#### Ex Approvals

### Approval details

# Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

## Approvals

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	70019651
Nominal voltage UN		250 V	
Nominal current IN		6 A	

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		250 V	
Nominal current IN		6 A	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		250 V	
Nominal current IN		6 A	

EAC		RU C- DE.A*30.B00767
-----	--	-------------------------

cULus Recognized	
------------------	--

## Accessories

### Accessories

#### Disconnect terminal block

Knife disconnect terminal block - ST 2,5-TWIN-MT/1P - 3040766



Knife disconnect terminal block, nom. voltage: 400 V, nominal current: 20 A, connection method: Spring-cage/plug-in connection, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, length: 81 mm, width: 5.2 mm, color: gray, mounting: NS 35/7,5, NS 35/15, nom. voltage: 400 V

## Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

### Accessories

Disconnect terminal block - ST 2,5-TWIN-TG/1P - 3040847



Disconnect terminal block, nom. voltage: 400 V, nominal current: 20 A, connection method: Spring-cage/plug-in connection, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, length: 81 mm, width: 5.2 mm, color: gray, mounting: NS 35/7,5, NS 35/15, nom. voltage: 400 V

---

### Multi-level terminal block

Double-level terminal block - PTTB 2,5/2P - 3210871



Double-level terminal block, connection method: Push-in / plug connection, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

Double-level terminal block - PTTB 2,5/2P BU - 3210884



Double-level terminal block, connection method: Push-in / plug connection, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

---

### PCB headers

Feed-through header - ST 2,5-PCBV/10-G-5,2 - 1980569



ST-COMBI receptacle, plug-in direction vertical to the PCB, pitch: 5.2 mm, no. of positions: 10

---

### Plug-in terminal block

Feed-through terminal block - UT 2,5/1P - 3045017



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Screw/plug-in connection, number of connections: 2, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

## Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

### Accessories

#### Feed-through terminal block - UT 2,5/1P BU - 3045020



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Screw/plug-in connection, number of connections: 2, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

---

#### Feed-through terminal block - PT 2,5/1P - 3210033



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in / plug connection, number of connections: 2, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, height: 35.3 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

---

#### Feed-through terminal block - PT 2,5/1P BU - 3210046



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in / plug connection, number of connections: 2, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, height: 35.3 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

---

#### Feed-through terminal block - QTC 1,5/ 1P - 3050073



Feed-through terminal block, nom. voltage: 500 V, nominal current: 17.5 A, connection method: Fast/plug-in connection, number of connections: 2, cross section: 0.25 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, AWG: 24 - 16, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

---

#### Feed-through terminal block - QTC 1,5/ 1P BU - 3050086



Feed-through terminal block, nom. voltage: 500 V, nominal current: 17.5 A, connection method: Fast/plug-in connection, number of connections: 2, cross section: 0.25 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, AWG: 24 - 16, width: 5.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

## Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

### Accessories

#### Feed-through terminal block - UT 2,5-TWIN/1P - 3060490



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Screw/plug-in connection, number of connections: 3, number of positions: 1, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

---

#### Feed-through terminal block - UT 2,5-TWIN/1P BU - 3060500



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Screw/plug-in connection, number of connections: 3, number of positions: 1, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

---

#### Feed-through terminal block - PT 2,5-TWIN/1P - 3209633



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in / plug connection, number of connections: 3, number of positions: 1, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, height: 35.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

---

#### Feed-through terminal block - PT 2,5-TWIN/1P BU - 3209646



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in / plug connection, number of connections: 3, number of positions: 1, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, height: 35.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

---

#### Feed-through terminal block - PT 2,5-QUATTRO/2P - 3209662



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in / plug connection, number of connections: 4, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15



## Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

### Accessories

#### Feed-through terminal block - PT 2,5-QUATTRO/2P BU - 3209675



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in / plug connection, number of connections: 4, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

---

#### Double-level terminal block - UTTB 2,5/2P - 3060351



Double-level terminal block, connection method: Screw/plug-in connection, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

---

#### Double-level terminal block - UTTB 2,5/2P BU - 3060364



Double-level terminal block, connection method: Screw/plug-in connection, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

---

#### Double-level terminal block - STTB 2,5/2P - 3040054



Double-level terminal block, connection method: Spring-cage/plug-in connection, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/15, NS 35/7,5

---

#### Double-level terminal block - STTB 2,5/2P BU - 3040672



Double-level terminal block, connection method: Spring-cage/plug-in connection, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, width: 5.2 mm, color: blue, mounting type: NS 35/15, NS 35/7,5

## Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

### Accessories

Double-level terminal block - QTTCB 1,5/ 2P - 3050196



Double-level terminal block, connection method: Fast/plug-in connection, cross section: 0.25 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, AWG: 24 - 16, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

Double-level terminal block - QTTCB 1,5/ 2P BU - 3050206



Double-level terminal block, connection method: Fast/plug-in connection, cross section: 0.25 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, AWG: 24 - 16, width: 5.2 mm, color: blue, mounting: NS 35/7,5, NS 35/15

Feed-through terminal block - ST 2,5/2P - 3042133



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage/plug-in connection, number of connections: 2, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

Feed-through terminal block - ST 2,5/2P BU - 3042094



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage/plug-in connection, number of connections: 2, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, width: 5.2 mm, color: blue, mounting type: NS 35/7,5, NS 35/15

### Terminal coupling

COMBI receptacle - SC 2,5/10 - 3042311



COMBI receptacle, nom. voltage: 500 V, nominal current: 24 A, connection method: Plug connection, number of connections: 1, number of positions: 10, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, width: 52 mm, height: 18.8 mm, color: gray

## Front adapters - VIP-PA-PWR/4X10COMBI/ 0,5M/S7 - 2904702

### Accessories

COMBI receptacle - SC 2,5/10 - 3042311



COMBI receptacle, nom. voltage: 500 V, nominal current: 24 A, connection method: Plug connection, number of connections: 1, number of positions: 10, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, width: 52 mm, height: 18.8 mm, color: gray

---

COMBI receptacle - SC 2,5/10 - 3042311



COMBI receptacle, nom. voltage: 500 V, nominal current: 24 A, connection method: Plug connection, number of connections: 1, number of positions: 10, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, width: 52 mm, height: 18.8 mm, color: gray

---

---