

Valve connectors - SACC-V-4CON-PG7/C-3+PE - 1511967


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Valve connectors, 4-position, Valve connector C (8 mm), Screw connection, cable gland Pg9, external cable diameter 4 mm ... 6 mm



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 909345
GTIN	4017918909345

Technical data

Dimensions

External diameter	4 mm ... 6 mm
-------------------	---------------

Ambient conditions

Ambient temperature (operation)	-30 °C ... 100 °C (connector)
Degree of protection	IP65

General

Rated current at 40°C	10 A
Rated voltage	240 V
Number of positions	4
Insulation resistance	≥ 100 MΩ
Status display	No
Protective circuit/component	unwired
Overvoltage category	II
Degree of pollution	3
Connection method	Screw connection
Conductor cross section	0.34 mm ² ... 1.5 mm ²
Conductor cross section AWG	22 ... 16
Insertion/withdrawal cycles	50 (Valve connector)

Valve connectors - SACC-V-4CON-PG7/C-3+PE - 1511967

Technical data

Material

Flammability rating according to UL 94	HB
Valve plug contact material	CuSn
Valve plug contact surface material	Ni
Valve plug contact insert material	PA6
Material housing valve plug	PA6
Sealing material	NBR

Standards and Regulations


Flammability rating according to UL 94	HB
--	----

Environmental Product Compliance


	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Circuit diagram



Dimensional drawing

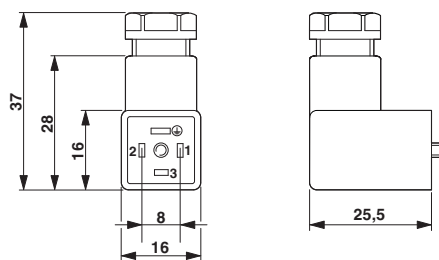

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		EAC-Zulassung
-----	--	---------------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>