

MMBTA92-AU

PNP HIGH VOLTAGE TRANSISTOR

VOLTAGE	300 Volt	POWER	250 mWatt
----------------	-----------------	--------------	------------------

FEATURES

- PNP silicon, planar design
- High voltage (max. 300V)
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard
- AEC-Q101 qualified

MECHANICAL DATA

- Case: SOT-23, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.0084 grams
- Marking: A92





Fig.35

SOT-23

Unit : inch(mm)

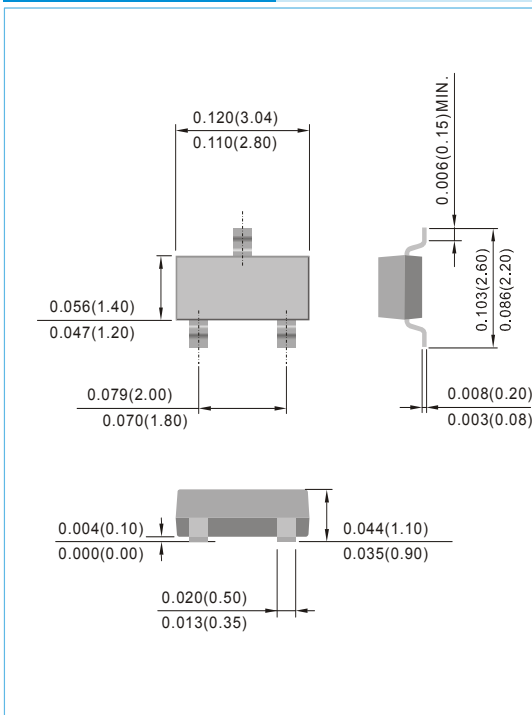

ABSOLUTE RATINGS

PARAMETER	CONDITIONS	SYMBOL	MIN.	MAX.	UNIT
Collector-base voltage	open emitter	V_{CBO}	-300	-	V
Collector-emitter voltage	open base	V_{CEO}	-300	-	V
Emitter-base voltage	open collector	V_{EBO}	-5	-	V
Collector current (DC)		I_C	-	-500	mA
Peak collector current		I_{CM}	-	-600	mA
Peak base current		I_{BM}	-	-100	mA
Total power dissipation	$T_{AMB} < 25^{\circ}C$; note1	P_{TOT}	-	250	mW
Storage temperature		T_{STG}	-55	+150	$^{\circ}C$
Junction temperature		T_J	-55	+150	$^{\circ}C$
Operating ambient temperature		T_{AMB}	-55	+150	$^{\circ}C$

Note 1: Mounted on FR4 PCB at 1 inch square copper pad.



MMBT A92-AU

THERMAL CHARACTERISTICS

PARAMETER	CONDITIONS	SYMBOL	VALUE	UNIT
Typical Thermal resistance from junction to ambient	note 1	$R_{\theta JA}$	500	°C/W

Note 1: Mounted on FR4 PCB at 1 inch square copper pad.

CHARACTERISTICS

$T_{AMB}=25^{\circ}\text{C}$ unless otherwise specified

PARAMETER	CONDITIONS	SYMBOL	MIN.	MAX.	UNIT
Collector-emitter breakdown voltage	$I_C=-1\text{mA}; I_B=0$	$V_{(BR)CEO}$	-300	-	V
Collector-base breakdown voltage	$I_C=-100\mu\text{A}; I_E=0$	$V_{(BR)CBO}$	-300	-	V
Emitter-base breakdown voltage	$I_E=-100\mu\text{A}; I_C=0$	$V_{(BR)EBO}$	-5	-	V
Collector cut-off current	$I_E=0; V_{CB}=-200\text{V}$	I_{CBO}	-	-250	nA
Emitter cut-off current	$I_C=0; V_{EB}=-3\text{V}$	I_{EBO}	-	-100	nA
DC current gain	$V_{CE}=-10\text{V}; \text{note 2}$ $I_C=-1\text{mA}$ $I_C=-10\text{mA}$ $I_C=-30\text{mA}$	h_{FE}	25 40 25	- - -	-
Collector-emitter saturation voltage	$I_C=-20\text{mA}; I_B=-2\text{mA}$	$V_{CE(SAT)}$	-	-500	mV
Base-emitter saturation voltage	$I_C=-20\text{mA}; I_B=-2\text{mA}$	$V_{BE(SAT)}$	-	-900	mV
Collector capacitance	$I_E=0; V_{CB}=-20\text{V};$ $f=1\text{MHz}$	C_C	-	6	pF
Transition frequency	$I_C=-10\text{mA}; V_{CE}=-20\text{V};$ $f=100\text{MHz}$	f_T	50	-	MHz

Note 2: Pulse test : $t_p \leq 300\mu\text{s}; \delta < 0.02$

MMBTA92-AU

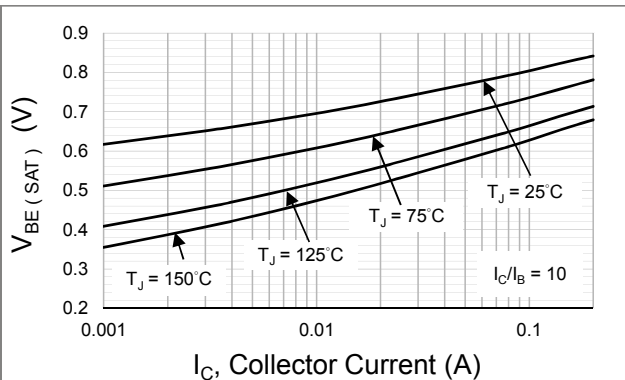


Fig.1 Typical Base-Emitter Saturation Voltage

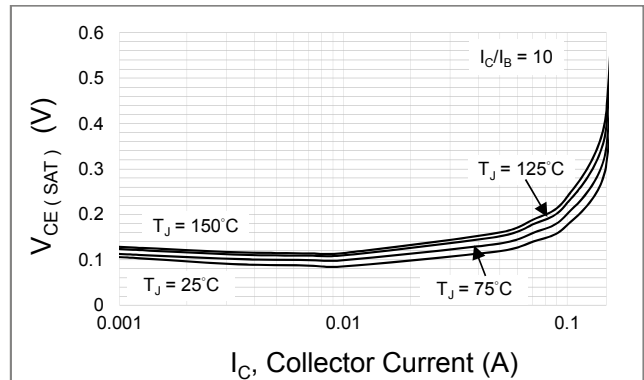


Fig.2 Typical Collector-Emitter Saturation Voltage

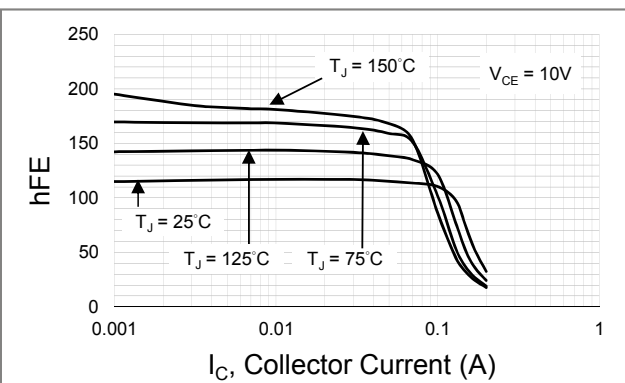


Fig.3 Typical DC Current Gain vs Collector Current

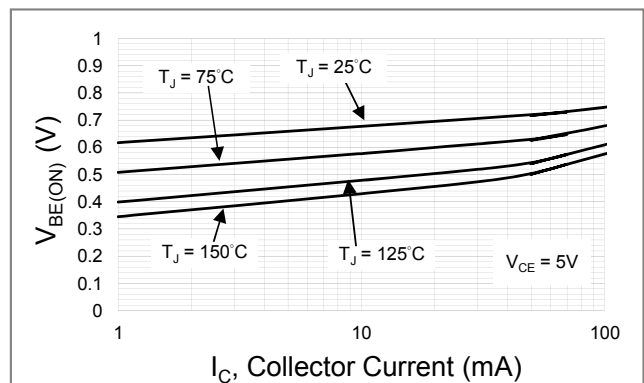


Fig.4 Typical Base - Emitter Voltage vs Collector Current

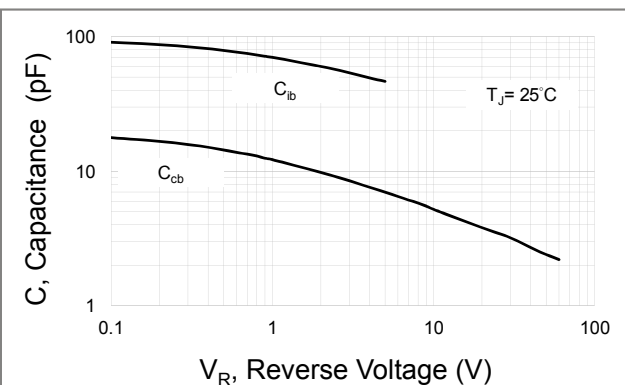



Fig.5 Typical Capacitance

MMBTA92-AU

MOUNTING PAD LAYOUT

SOT-23

Unit : inch(mm)

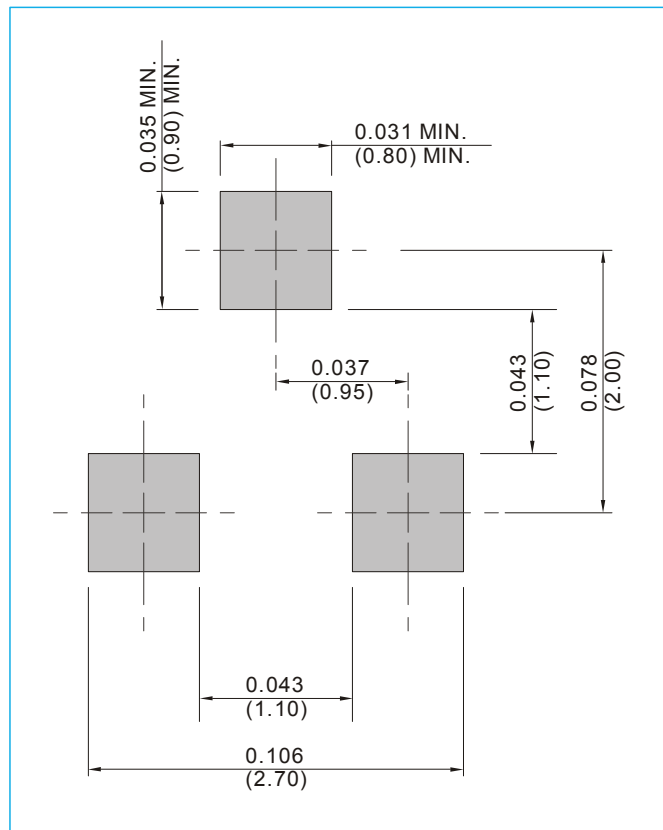

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

MMBTA92-AU

Part No_packing code_Version

MMBTA92-AU_R1_000A1

MMBTA92-AU_R2_000A1

For example :

RB500V-40_R2_00001

Part No.

Serial number

Version code means HF

Packing size code means 13"

Packing type means T/R

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



MMBTA92-AU

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.