
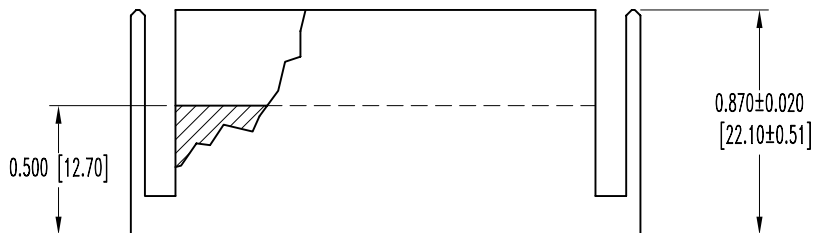



SK8075



POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
10-18-06	NC	ECO 26891		YK	

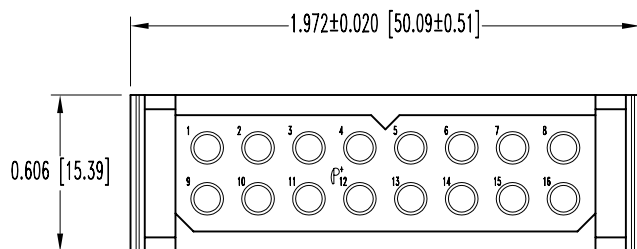

NOTES:

- MATERIALS AND FINISHES:
INSULATOR - GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
- ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE - 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
WORKING VOLTAGE - 600 VAC.
- TEMPERATURE RANGE -55°C TO +125°C.
- CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE		DRAWN BY	
 DECIMAL TOL. ± 0.015 [0.38]		PCS SERIES N.T.S.		YK APPROVED BY	
TITLE PLB16M0000/AA		DATE		REV.	
ANGULAR TOL. $\pm 5^\circ$		10-18-06		SK8075 NC	